

Adjustable Tire Storage Rack Instructions



Adjustable Tire Storage Rack

Please read all warnings and instructions before attempting to install or use this product

Product Specifications:


- Width between bracket mounting bolts: 48"
- Storage bar width: 46"
- Depth: Adjustable with chain link and "S" hook (Maximum Depth Off Wall: 24" - easily supports 12"-19" mounted tires)
- Height: 24"
- Supports up to: 250 lbs (4 tires up to 11.5" wide each)

Instruction Sheet:

Please be sure to keep this set of instructions in a safe location, as it details the safe operation of this product, as well as the assembly, maintenance and storage methods. Please be sure to also store your purchase receipt in a safe location, this is required for any warranty concerns down the road.

Notices:



1. Please read all of these instructions and familiarize yourself with the complete process before you begin.
2. Perform this install in a safe, well lit, level area.
3. Always wear safety glasses.
4. Always read and follow all safety information and warnings for the equipment you are using.
5. If using a ladder, please ensure it is on flat, level ground and obey all warnings printed on the ladder.
6. Please make sure to store/install this product in a safe location such as a garage.
7. Please ensure that this product is out of reach of children.
8. Please do not install this product in an area with standing water or excessive moisture.
9. DO NOT exceed the weight limit of 250 lbs for this product, and do not use the product to store anything it was not designed to hold.
10. DO NOT remove any warning stickers, labels or the name plate from this product.

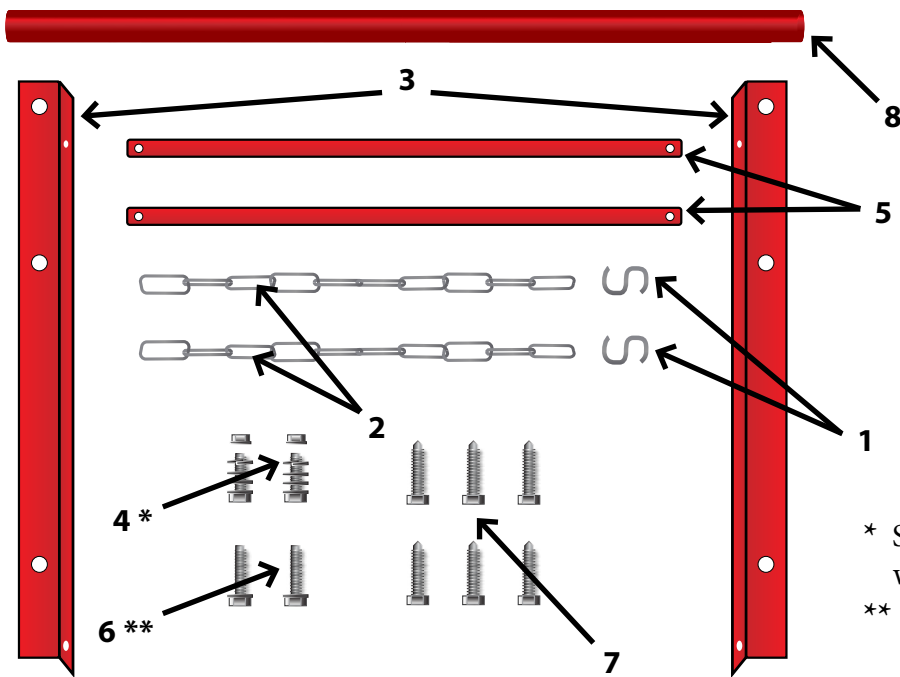

No.	Part Name	QTY
1	"S" Hooks	2
2	Chain	2
3	Wall Brackets	2
4	Short Bolts	2
5	Straight Brackets	2
6	Long Bolts	2
7	Lag Screws	6
8	Rod	1

* Short Bolts come pre-installed with two flat washers, one lock washer, and one nut.

** Each Long Bolt requires the use of one flat washer which is included in the hardware kit.

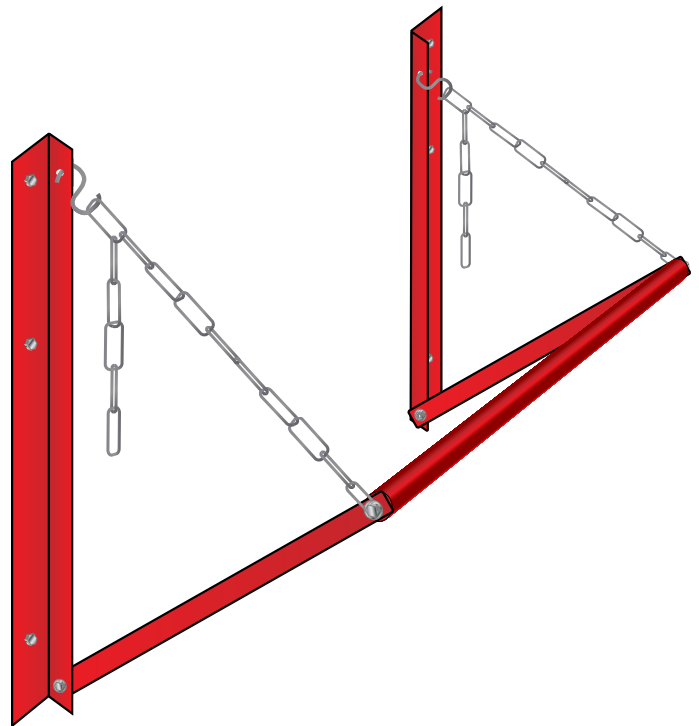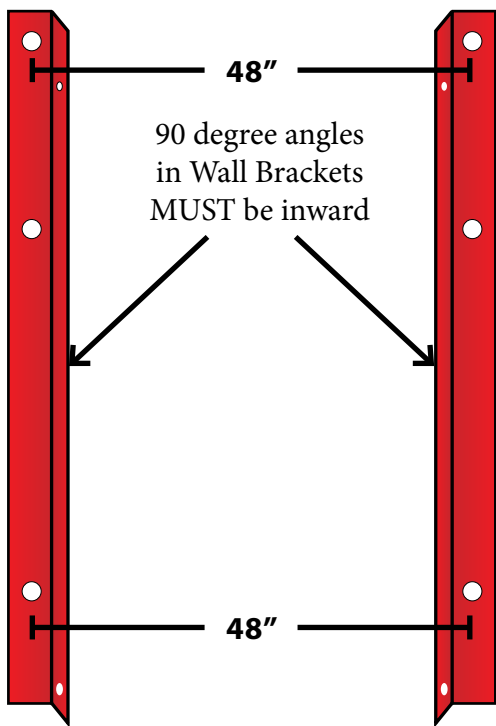

Assembly Instructions:

1. Locate two wall studs on the wall you are installing the tire rack onto, make sure the Wall Brackets (#3) are level/square and that the mounting holes are 48" apart. Drill a 1/8" hole into the wall at each bolt location, then attach the Wall Brackets (#3) to the wall studs with the supplied Lag Screws (#7). It is CRUCIAL that you make sure the 90 degree angles in the Wall Brackets are INWARD when installing them onto the wall.
2. Insert one of the Long Bolts (#6) through the last link on one of the Chains (#2), then insert the bolt through one of the Straight Brackets (#5), and into the Rod (#8), tighten the bolt until snug. Repeat this step to attach the other Chain and Straight Bracket to the Rod.
3. Then attach the Rod and Straight Brackets we assembled in Step 2 to the Wall Brackets (#3) using the Short Bolts (#4).
4. Adjust the tire rack to your desired height by using the "S" Hook (#1) to vary the length of the Chain (#2).