



## ENDO-T™

AccuAir's ENDU-Tank™ is the backbone of the ENDU™ platform and although it is the simplest product in the line, it's features and quality make it the perfect centerpiece to an air management system and will be ready for modular upgrade when you are. Extruded from aerospace grade aluminum and assembled with ultra-high-strength bolts, this weld-less tank is proven to be free from leaks in addition to having precision machined fit and finish. Flush ports and mounting points are CNC-machined directly into the patent pending aluminum body. Modular construction allows the end-caps to be removed allowing for never before imagined feature combinations to go inside the tank when you're ready to upgrade.

### FEATURES



#### **Bolted Construction**

Modular and bolted construction makes disassembly possible for upgrades.



#### **No Welds**

Weld-less construction prevents leaks.



#### **Extruded Internal Ribs**

Extruded internal rails house embedded mounting locations along the tank providing clamp-less attachment of ENDU-Mount™ brackets and accessories.




#### **Mounting Options**

Bottom or top mountable.



#### **DOT Rated & Tested**

The only DOT Approved Aluminum air tank for air suspension. Certified to 200 psi and tested to an incredible 1324 psi burst pressure.



#### **ENDO™ Quick Release**

Included ENDU-QR™ quick release mounting system allows easy installation and even easier air management assembly outside the vehicle.



#### **ENDO™ Upgrade**

Upgradeable with all other ENDU™ Technologies now or in the future.



#### **Made & Assembled in USA**

Made in the USA with a limited lifetime warranty.

# ENDO-T™ DATA SHEET

## AVAILABLE FINISHES



GRAY CERAKOTE

BRONZE CERAKOTE

BLACK CERAKOTE

RAW FINISH

## HARDWARE INCLUDED

Includes black nickel plated fittings and a built-in 400 psi blow-off valve to ensure safe use.



## ENDO™ QUICK RELEASE

Included ENDO-QR™ quick release mounting system allows easy installation and even easier air management assembly outside the vehicle.

# ENDO-T™ DATA SHEET


## PHYSICAL SPECIFICATIONS

Product	Diameter	Length	Air Spring Ports
ENDO-T3	6.62in (168mm)	18.3in (465mm)	N/A*
ENDO-T5	6.62in (168mm)	29.3in (745mm)	N/A*

## TORQUE SPECIFICATIONS

FASTENER	TORQUE
QUICK RELEASE (QR) PINS	40 in-lbs (3.3 ft-lbs, 4.5 N-m)
QUICK RELEASE BASE MOUNTING BOLTS	120 in-lbs (10.0 ft-lbs, 13.5 N-m)
QUICK RELEASE SET SCREW	40 in-lbs (3.3 ft-lbs, 4.5 N-m)
ENDO CAP BOLTS	200 in-lbs (16.7 ft-lbs, 22.6 N-m)

## DIMENSIONS IN INCHES (NOT TO SCALE) 5-GALLON ENDO-T™

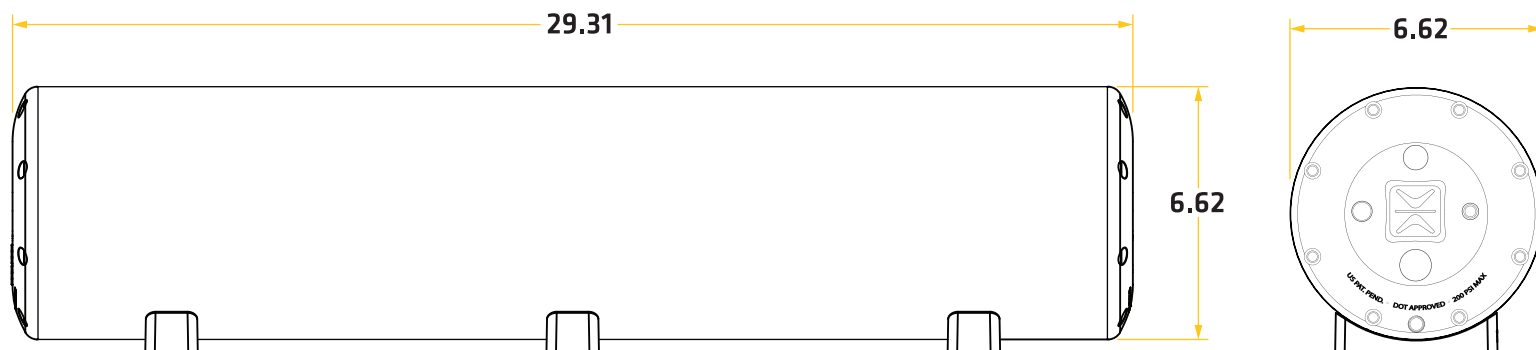

## DIMENSIONS IN INCHES (NOT TO SCALE) 3-GALLON ENDO-T™

