

Removal and Installation Instructions for Leyo Turbo Inlet Pipe



Tools required:

T25 Torx Driver
Small screwdriver (dentist tool)
Flat Blade Screwdriver



Turbo Inlet Pipe removal and installation:


Step 1- Loosen hose clamps on airbox and Turbo Inlet Pipe (TIP)




Step 2- Remove PVC hose on TIP by squeezing and plastic tabs and lifting



Step 3- Remove T25 Torx bolt from Turbo housing

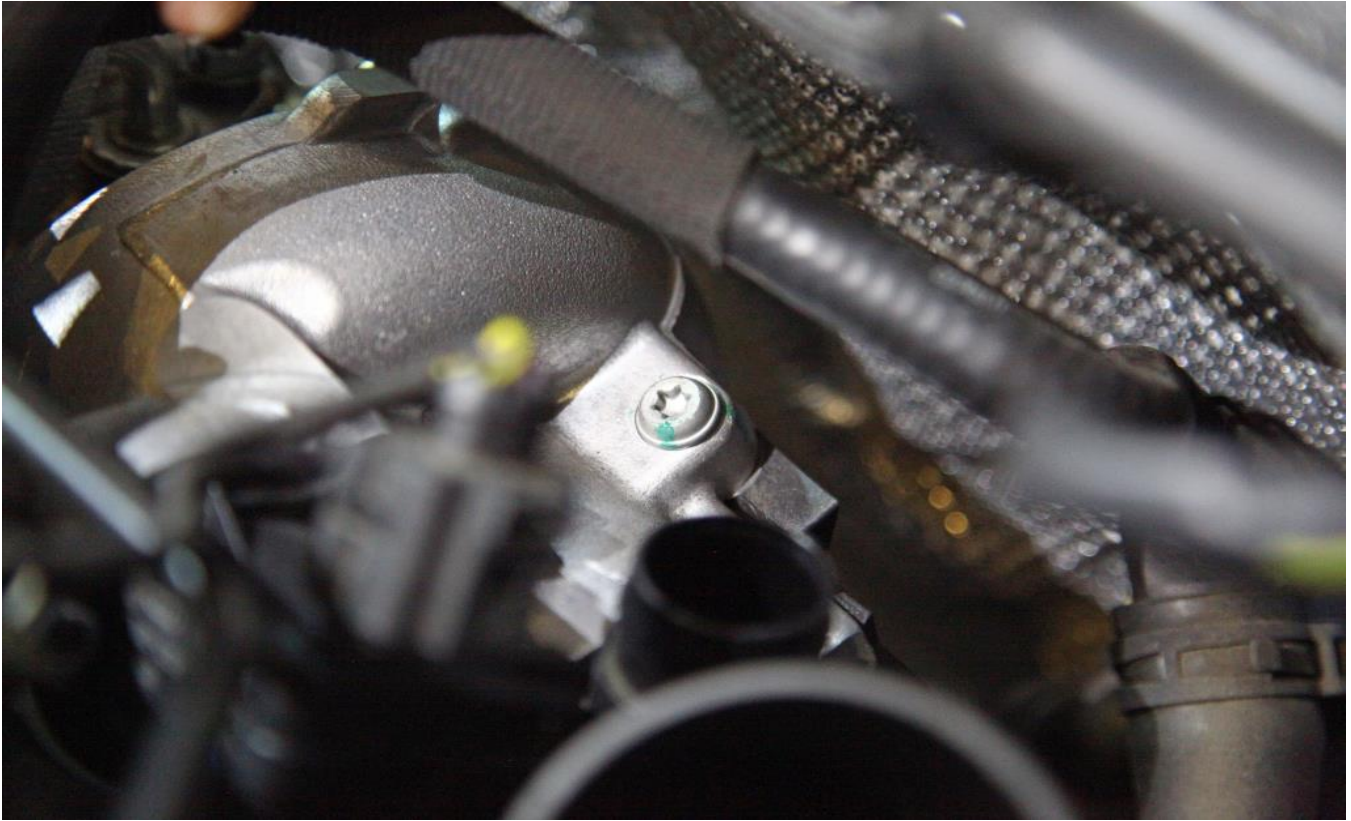

Step 4- Remove TIP by rotating towards firewall then slide towards left side of car

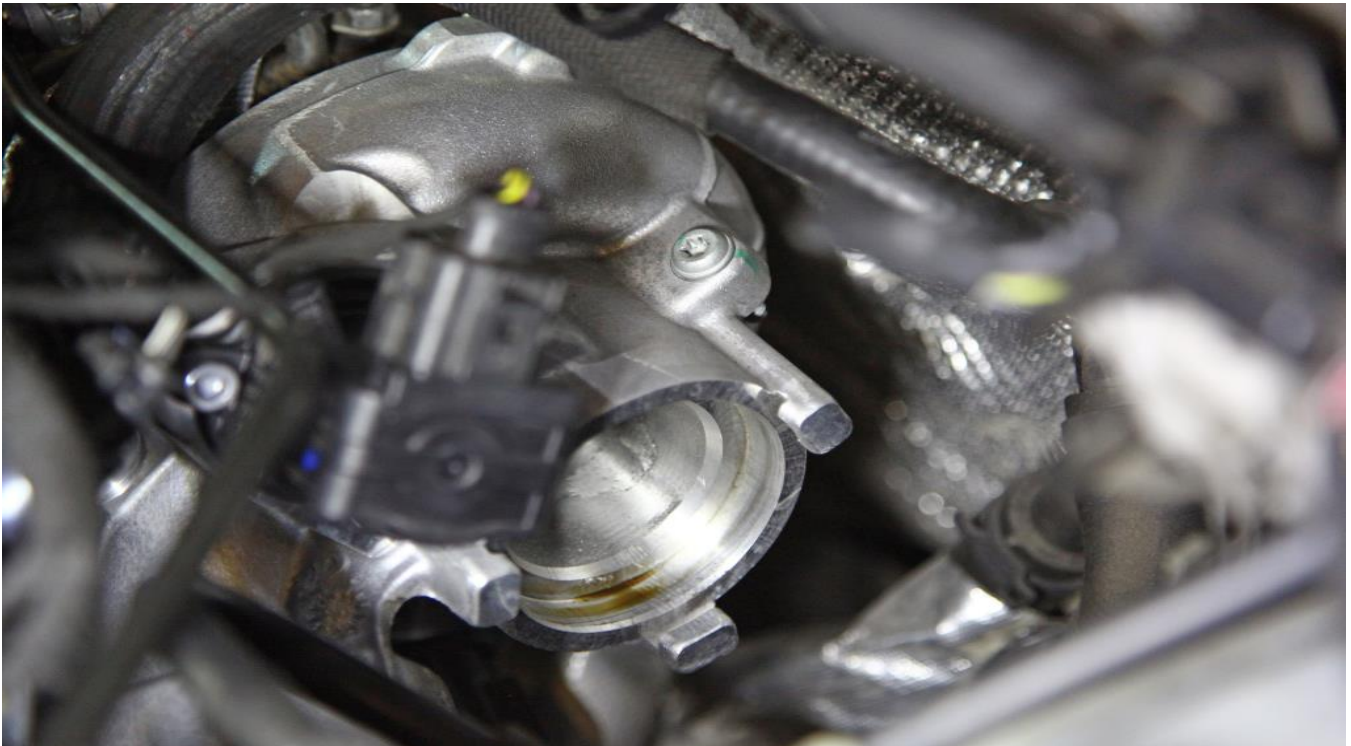


Step 5- Remove factory O-Ring using small screwdriver (dentist tool)



Step 6- Place O-ring onto Leyo TIP



Step 7- Install Leyo TIP back into Turbo housing and tighten T25 Torx bolt

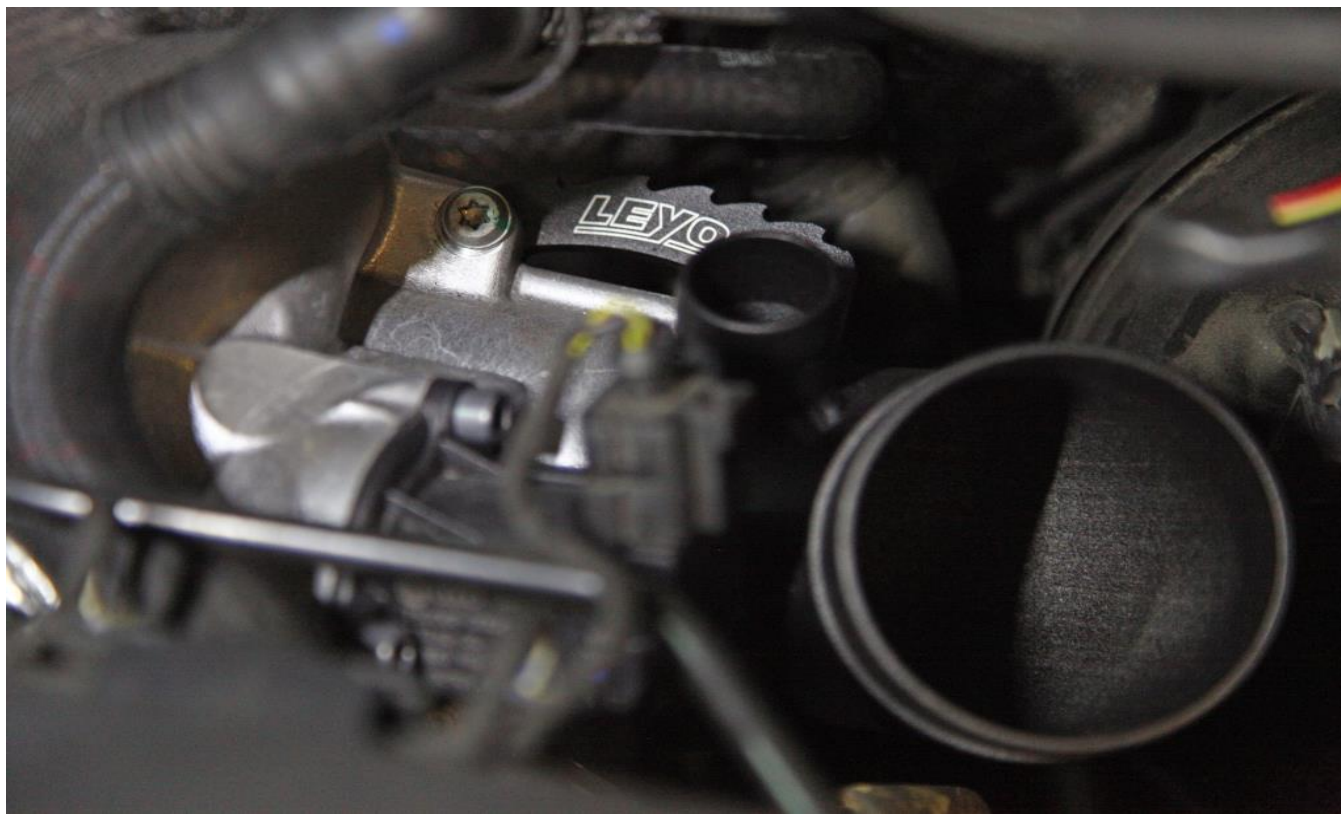

Step 8- Re-Connect PVC hose and airbox hose

