




Volkswagen MK5 GTI ECS Valved Exhaust System Installation Instructions

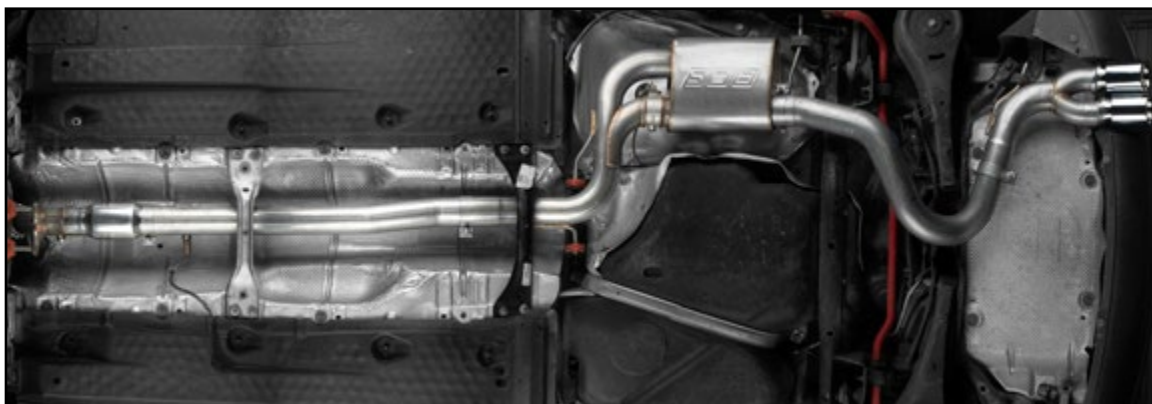

Proper service and repair procedures are vital to the safe, reliable operation of all motor vehicles as well as the personal safety of those performing the repairs. Standard safety procedures and precautions (including use of safety goggles and proper tools and equipment) should be followed at all times to eliminate the possibility of personal injury or improper service which could damage the vehicle or compromise its safety.

INTRODUCTION


Volkswagen MK5 GTI ECS Valved Exhaust System

The ECS Tuning Valved Exhaust System for your VW MK5 GTI offers the following features:


- High quality T304 grade stainless steel
- 3.0" mandrel-bent tubing
- Remote Controlled Exhaust Valve
- Fully adjustable exhaust tips, in Chrome or Black Chrome
- All installation hardware included




The Cat-Back and Turbo-Back systems utilize a vacuum control valve which is detailed on [Page 39](#). In order to install this vacuum control valve you **MUST** either already have a Boost Tap installed on the vehicle, or one **MUST** be purchased prior to installation. The ECS Tuning Boost Tap can be found on www.ecstuning.com: [ES#2718328](#).




**BASIC SKILLS
REQUIRED**



**SOME EXPERIENCE
RECOMMENDED**

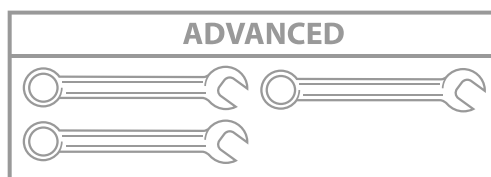

**ADVANCED SKILLS &
EXPERIENCE REQUIRED**

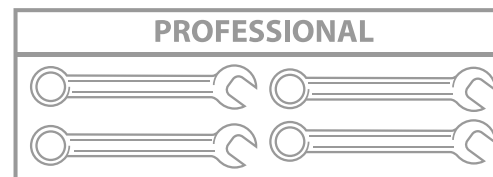

**PROFESSIONAL SKILLS &
SPECIALTY TOOLS REQUIRED**

Upgrading the exhaust on your Volkswagen MK5 GTI is a very rewarding project that an experienced technician will be able to complete in a weekend, plan accordingly based on your experience level. The ECS Tuning performance exhaust system will fit like the stock system, but will completely change the character of your car. Before you begin, read and familiarize yourself with these instructions and make sure you have all the required tools on hand. Thank you for purchasing your new Valved Exhaust System from ECS Tuning, we appreciate your business!

[Table of Contents](#)

TABLE OF CONTENTS

| | |
|--|-----------------------|
| Downpipe Kit Contents..... | pg.4 |
| Cat-Back Kit Contents | pg.5 |
| Turbo-Back Kit Contents..... | pg.6 |
| Required Tools and Equipment..... | pg.7 |
| Shop Supplies and Materials..... | pg.7 |
| Installation Notes | pg.8 |
| Preparation and Safety..... | pg.8 |
| Component Locations | pg.9 |
| Removing the Stock Cat-Back..... | pg.10 |
| Removing the Stock Downpipe..... | pg.12 |
| Installing the New Downpipe..... | pg.26 |
| Installing the New Cat-Back..... | pg.32 |
| Remote Exhaust Valve Controller System Kit Contents..... | pg.39 |
| Remote Exhaust Valve Controller System Diagram | pg.40 |
| Installing the Remote Exhaust Valve Controller | pg.41 |
| Using the VAG Connector Tool | pg.47 |
| Schwaben Tools | pg.48 |



This PDF has been created in order to assist you with your ECS exhaust system installation, regardless of whether you purchased a **Downpipe**, **Cat-Back**, or a **Turbo-Back**. For all three options, begin with step 1 on [Page 10](#), you will be prompted from there to either skip steps or continue on based upon which system you are installing.

DOWNPIPE KIT CONTENTS

Available at www.ecstuning.com - [ES#2903346](#)



Downpipe with Integrated High Flow Catalytic Converter



Centerpipe Extension



Downpipe Gasket and Hardware



Adapter and Exhaust Sleeve



Exhaust Clamps

[Table of Contents](#)

CAT-BACK SYSTEM KIT CONTENTS

Available at www.ecstuning.com - [ES#2903361](#) or [ES#2903378](#)



Valved Muffler Assembly



Y-Pipe



Exhaust Clamps and Adapter



Tailpipe Section



Remote Valve Controller



Exhaust Tips: Chrome or Black Chrome

[Table of Contents](#)

TURBO-BACK SYSTEM KIT CONTENTS


Available at www.ecstuning.com - [ES#2903383](#) or [ES#2903385](#)



Tailpipe Section



Exhaust Clamps

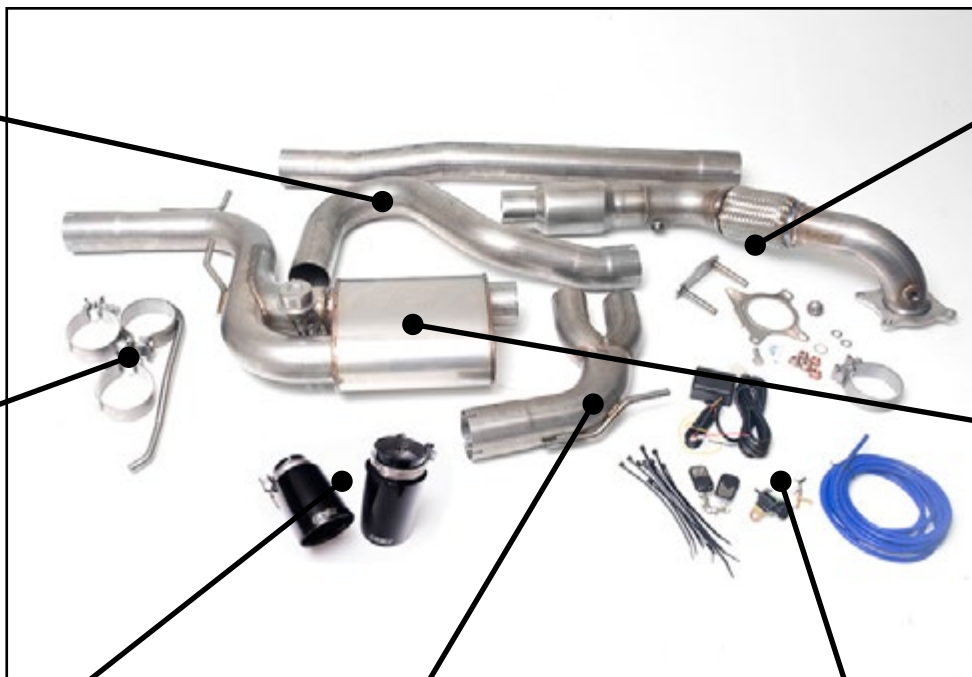

Downpipe Kit



Valved Muffler Assembly



Exhaust Tips: Chrome or Black Chrome



Y-Pipe



Remote Valve Controller

[Table of Contents](#)

REQUIRED TOOLS

Note: The tools required for each step will be listed by the step number throughout these instructions.

We recommend that you have a complete selection of tools and equipment necessary for automotive repair. Below is a list of the tools we used to install the ECS Tuning Valved Exhaust System. Additional tools may be required for any issues that arise during installation such as rust, corrosion, or broken and stripped fasteners.

- 3/8" Drive Ratchet [ES#2765902](#)
- 3/8" Drive Torque Wrench..... [ES#2221245](#)
- 3/8" Drive Sockets: 10mm, 13mm, 15mm, 16mm,
17mm, 18mm, 19mm [ES#2763772](#)
- 3/8" Drive Extensions
- Torx Bit Sockets: T30 [ES#11418](#)
- Torx Drivers: T25, T30..... [ES#11417](#)
- Triple Square Driver: M8..... [ES#9013](#)
- Open/Boxed End Wrenches: 16mm, 17mm [ES#2765907](#)
- Exhaust Hanger Remover Pliers [ES#2784927](#)
- Oxygen Sensor Wrench [ES#240942](#)
- VAG Connector Tool [ES#2628676](#)
- Locking Hose Clamp Pliers [ES#2702616](#)

SHOP SUPPLIES AND MATERIALS

- Hand Cleaner/Degreaser..... Available at [ecstuning.com](#)..... [ES#2167336](#)
- Aerosol Brake Cleaner..... Available at your local auto parts store
- Shop Rags Available at your local auto parts store
- Aerosol Spray Lubricant/Penetrating Oil..... Available at your local auto parts store

INSTALLATION NOTES

- **RH** refers to the passenger side of the vehicle.
- **LH** refers to the driver side of the vehicle.
- Always use the proper torque specifications.
- If applicable to this installation, torque specifications will be listed throughout the document and at the end as well.
- Please read all of these instructions and familiarize yourself with the complete process **BEFORE** you begin.

GENERAL PREPARATION AND SAFETY INFORMATION


ECS Tuning cares about your health and safety. Please read the following safety information. This information pertains to automotive service in general, and while it may not pertain to every job you do, please remember and share these important safety tips.

- Park your car in a safe, well lit, level area.
- Shut the engine off and remove the key from the ignition switch.
- Make sure any remote start devices are properly disabled.
- **ALWAYS** wear safety glasses.
- Make sure the parking brake is applied until the vehicle is safely lifted and supported.
- If using an automotive lift, be sure and utilize the factory specified lift points. Lifting a vehicle in an incorrect location can cause damage to the suspension/running gear.
- When lifting a vehicle using a jack, always utilize the factory specified lift points. Lifting a vehicle in an incorrect location can cause damage to the suspension/running gear. **ALWAYS** support the vehicle with jack stands.
- Always read and follow all safety information and warnings for the equipment you are using.



Never get underneath a vehicle that is supported only by a jack. Always make sure that the vehicle is securely supported on jack stands.

COMPONENT LOCATIONS

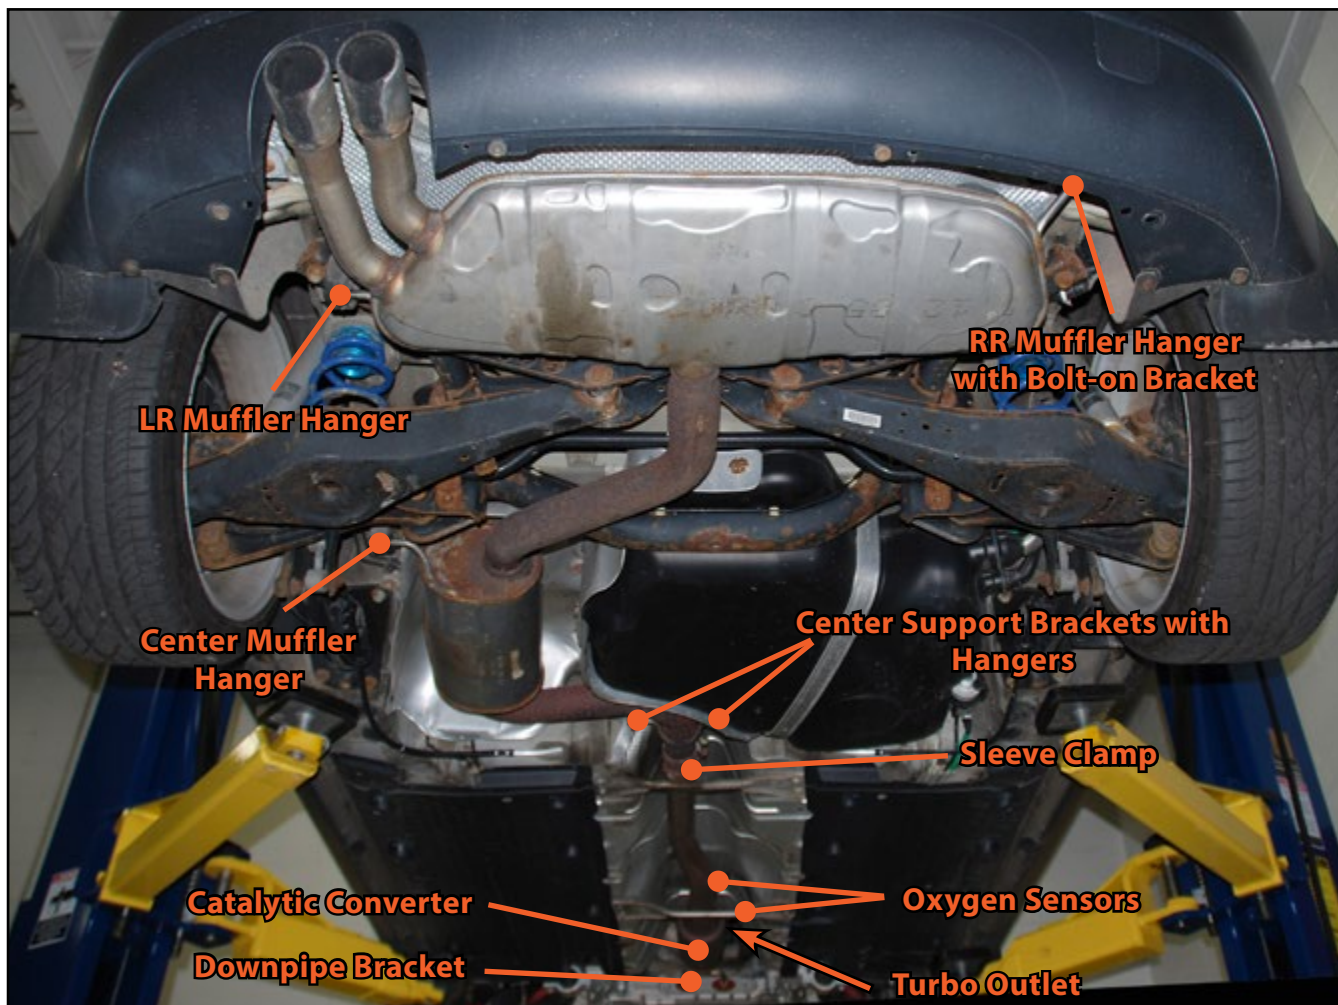

REMOVING THE STOCK CAT-BACK

Step 1:

Raise and safely support the vehicle.



Please follow steps 1 & 2 regardless of whether you purchased a **Cat-Back**, **Turbo-Back** or **Downpipe**.


Step 2:

3/8" Drive Ratchet, 17mm Socket

Loosen the nuts (arrows) on the exhaust sleeve at the end of the downpipe/converter assembly. Slide the exhaust sleeve forward or backward on the exhaust pipe to separate the joint.



If you purchased a **Turbo-Back** or **Cat-Back** system, please continue to the [next step](#). If you purchased a **Downpipe** only, please skip to [Page 13](#).

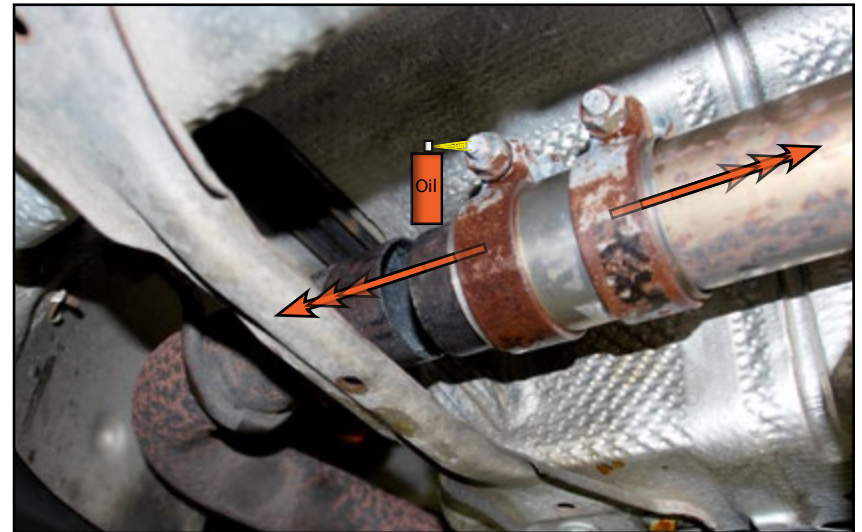

[Table of Contents](#)


REMOVING THE STOCK CAT-BACK

Step 3: Exhaust Pipe Hanger Remover Pliers

Support the exhaust from below, then release all of the exhaust pipe hangers **(except for the right rear muffler hanger)** from the system. Please refer to the diagram on [Page 9](#) for all of the hanger locations.


CAUTION

Enlist the help of a couple friends before lowering the system. It is very heavy and will require at least two people to safely remove it.

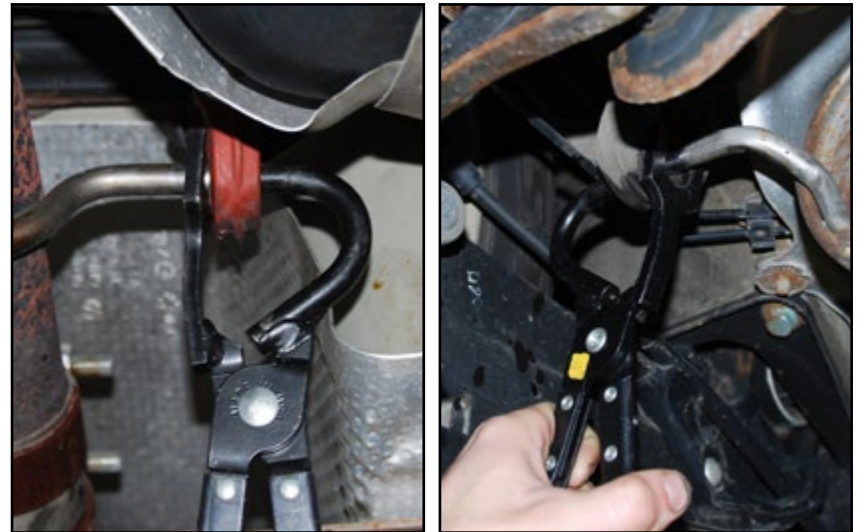

Step 4: 3/8" Drive Ratchet, 13mm Socket, Extension

Loosen the two bolts for the RR muffler hanger bracket, remove one bolt and leave the other bolt in finger tight.

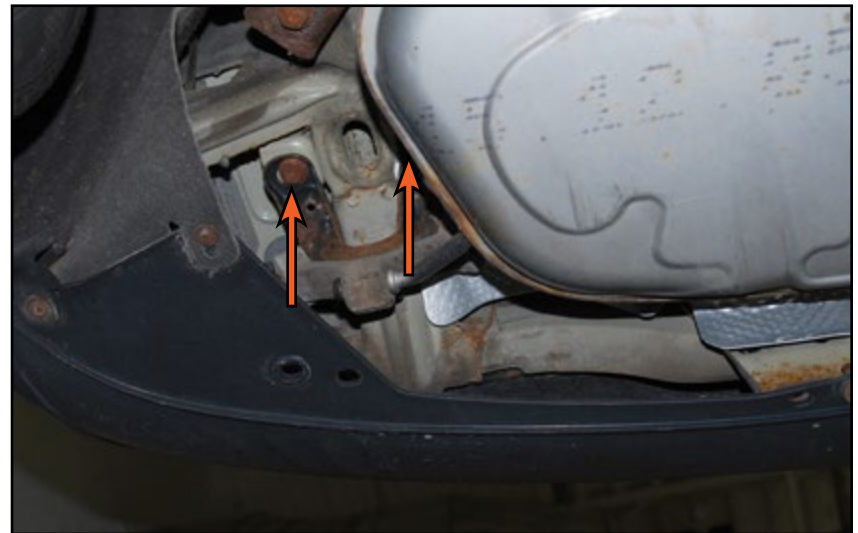[Table of Contents](#)

REMOVING THE STOCK CAT-BACK

Step 5:

While supporting each end of the exhaust, remove the finger tight bolt from the RR muffler hanger bracket. Ensure that the front joint is separated from the sleeve clamp, then lower the muffler assembly as one piece, with the RR bracket attached.



Step 6:

The RR hanger is not going to be used for the ECS Tuning Cat-Back system, but you must reinstall the RR hanger bolt, in order to secure the heat shield. Torque the bolt to 23 Nm (17 Ft-lbs).



If you purchased a **Turbo-Back** system, please continue to the [next step](#). If you purchased a **Cat-Back** system, please skip to [Page 32](#).

[Table of Contents](#)

REMOVING THE STOCK DOWNPIPE

Step 1:



If your MK5 GTI is equipped with an FSI engine, please continue to [Page 14](#).

Step 2:



If your MK5 GTI is equipped with a TSI engine, please continue to [Page 16](#).



[Table of Contents](#)


REMOVING THE STOCK DOWNPIPE - FSI

Step 3: Hose Clamp Pliers

Release the Spring Band Clamp for the Intake Air Duct and move it onto the end of the inlet for the Air Filter Housing, then pull the end of the Intake Air Duct forward to separate it from the Air Filter Housing.



If you are installing a **Downpipe** only, please be sure to begin with step 1 on [Page 10](#).

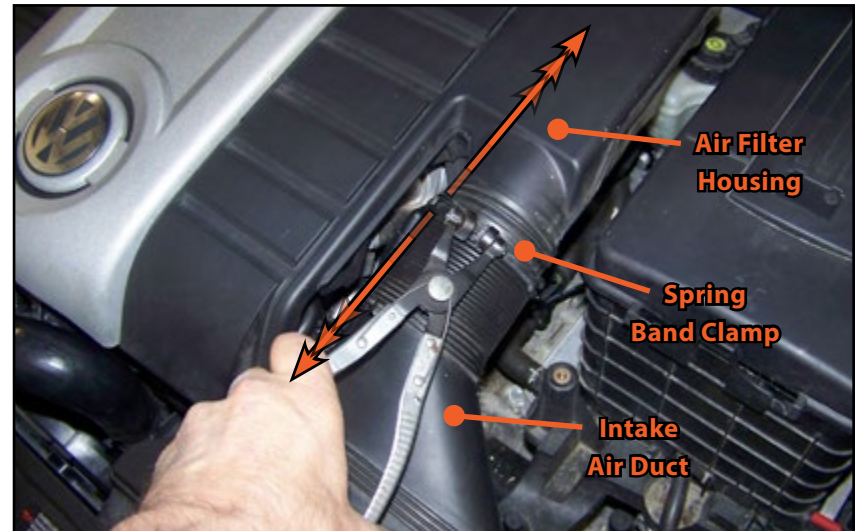


Step 4: VAG Connector Removal Tool

Disconnect the MAF electrical connector from the MAF sensor, then pop the two spring metal clips which hold the intake pipe to the Air Filter Housing, and pull the pipe away from the housing.

TECH TIP

For tips on using the VAG Connector Tool, please refer to [Page 47](#) for detailed photos and procedures.

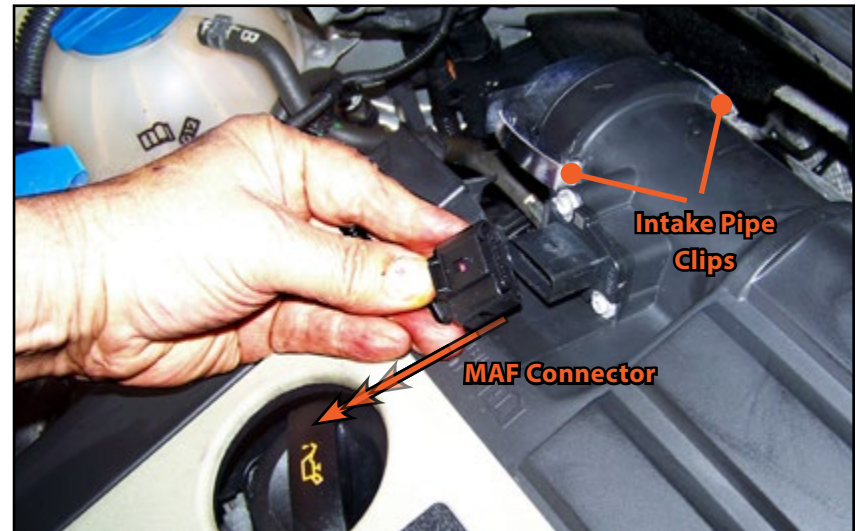

[Table of Contents](#)


REMOVING THE STOCK DOWNPIPE - FSI

Step 5:

Grasp the Air Filter Housing and lift straight up one corner at a time to release the rubber mounting grommets from their mating pins on the engine. The photo to the right (showing the reverse side of the housing) is for reference, to demonstrate the location of the rubber mounting grommets.

CAUTION

Be sure to pull on the housing as close to each grommet as possible during removal to prevent damage. We have found that it's best to start by pulling up on the driver's side front grommet, then the driver's side rear, then the passenger's side rear, and finally the passenger's side front.

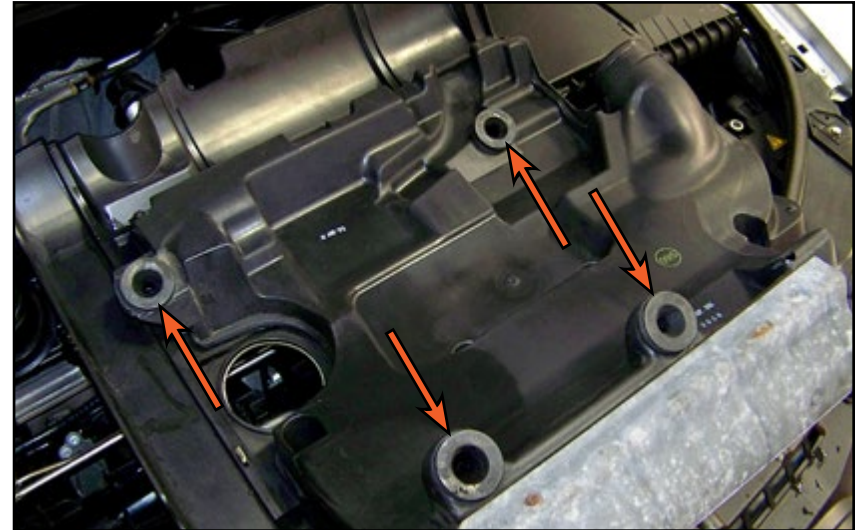

Step 6: 10mm Socket, 18mm Socket, M8 multi-point Bit

Remove the fasteners which secure the cover plate to the engine, they are difficult to see so a mirror may need to be used. Move the cover plate down off of the studs on the inside of the upper section, and then pull it straight out.



Once the engine cover and exhaust cover plate have been removed from your FSI equipped MK5 GTI, please continue to [Page 20](#).



[Table of Contents](#)

REMOVING THE STOCK DOWNPIPE - TSI

Step 7:

Remove the engine cover by carefully lifting upwards one corner at a time, then set the engine cover aside.



If you are installing a **Downpipe** only, please be sure to begin with step 1 on [Page 10](#).


Step 8:

VAG Connector Tool

Disconnect the Mass Air Flow sensor electrical connector.

TECH TIP

For tips on using the VAG Connector Tool, please refer to [Page 47](#) for detailed photos and procedures.

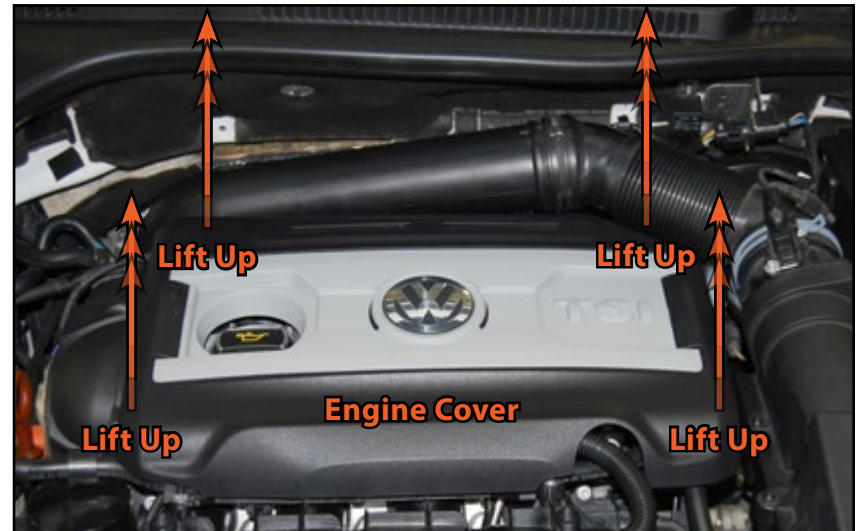

[Table of Contents](#)

REMOVING THE STOCK DOWNPIPE - TSI

Step 9: Locking Hose Clamp Pliers

Release the tension on the spring clamp that secures the flexible intake tube to the Mass Air Flow sensor.



Step 10: Locking Hose Clamp Pliers

Pull the flexible intake tube off of the Mass Air Flow sensor.



[Table of Contents](#)

REMOVING THE STOCK DOWNPIPE - TSI

Step 11: 3/8" Drive Ratchet, T30 Torx Socket

Remove the bolt securing the turbo inlet pipe to the heat shield, behind the rear of the cylinder head (shown here with the flexible intake tube removed for clarity).



Step 12:

Remove the crank vent hose from the turbo inlet pipe by pinching the retaining tabs together, then pulling it off of the pipe.

[Table of Contents](#)

REMOVING THE STOCK DOWNPIPE - TSI

Step 13: Locking Hose Clamp Pliers

Next we need to remove the turbo inlet pipe, to do so we need to release the tension on one of the two spring clamps, which are very difficult to see. It is easiest to loosen the lower clamp on the turbo inlet pipe coupler, then pull the turbo inlet pipe and coupler off and set them aside.




Step 14: 10mm Socket, 18mm Socket, M8 multi-point Bit

Remove the fasteners which secure the cover plate to the engine, they are difficult to see so a mirror may need to be used. Move the cover plate down off of the studs on the inside of the upper section, and then pull it straight out.



Once the engine cover and exhaust cover plate have been removed from your TSI equipped MK5 GTI, please continue to the [next page](#).

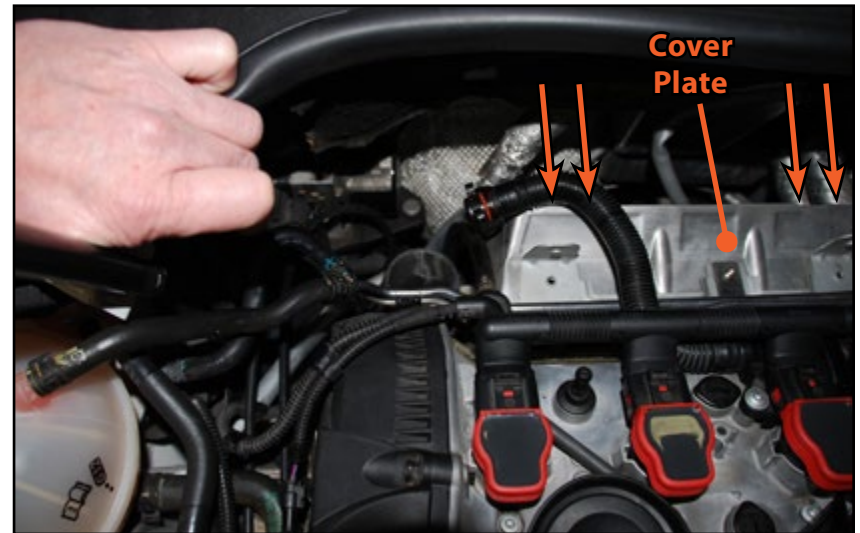
[Table of Contents](#)


REMOVING THE STOCK DOWNPIPE

Step 15: VAG Connector Tool

Unplug the front oxygen sensor connector, then remove the wiring harness from the two clips.



From this point forward these instructions include both FSI and TSI equipped vehicles.

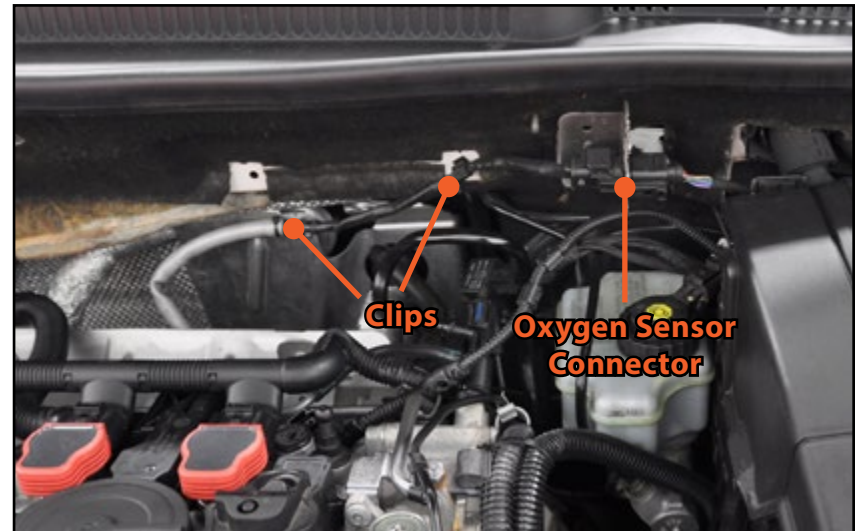


Step 16: Oxygen Sensor Wrench, 16mm Wrench

Loosen and remove the front oxygen sensor, then loosen and remove the two upper nuts on the turbo outlet flange.

TECH TIP

Spray the oxygen sensor and the downpipe nuts with penetrating oil and allow the oil to soak in before attempting to remove them.

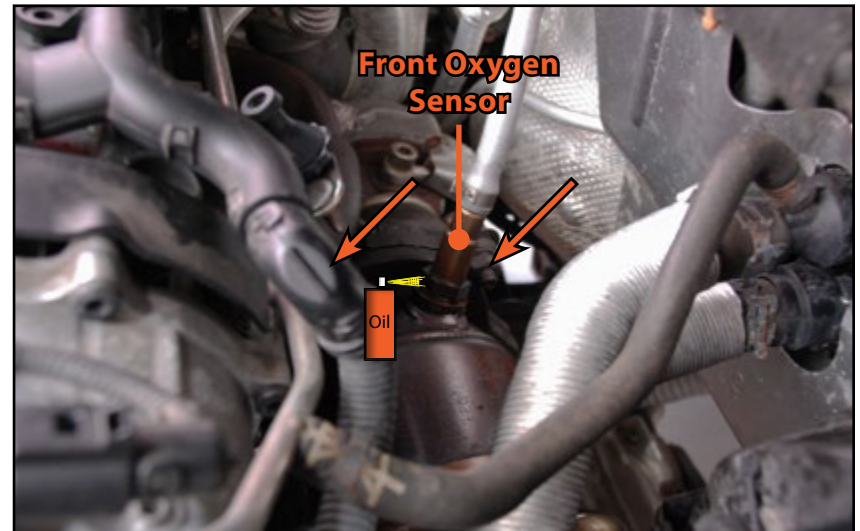


[Table of Contents](#)

REMOVING THE STOCK DOWNPIPE

Step 17: 3/8" Drive Ratchet, 10mm Socket


Working from below the vehicle, loosen the four plastic shouldered hex nuts on the inner side of the right underbody panel.

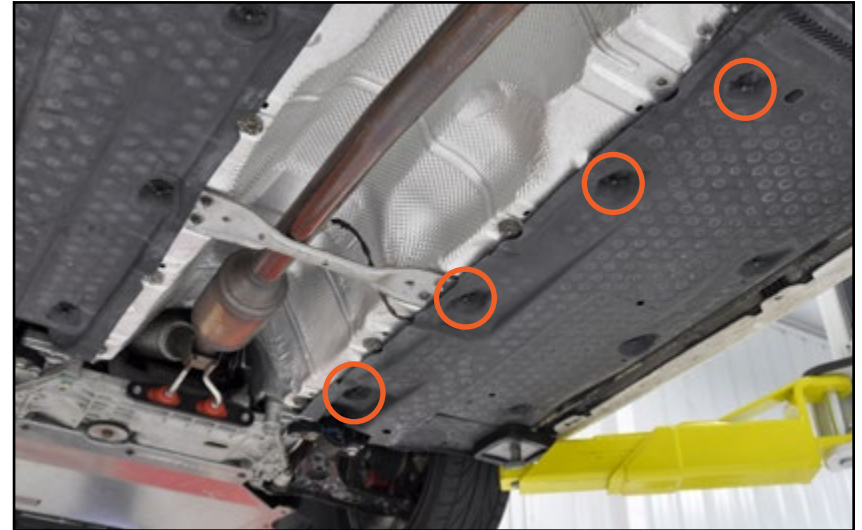

Step 18: VAG Connector Tool

Pull down the open side of the underbody panel to gain access to the rear oxygen sensor harness connection. Disconnect the connector, the easiest way to do this is to push in on the connector, release the locking tab, then pull the connector off.

Remove the plug end from the bracket and release the wire from the clip.

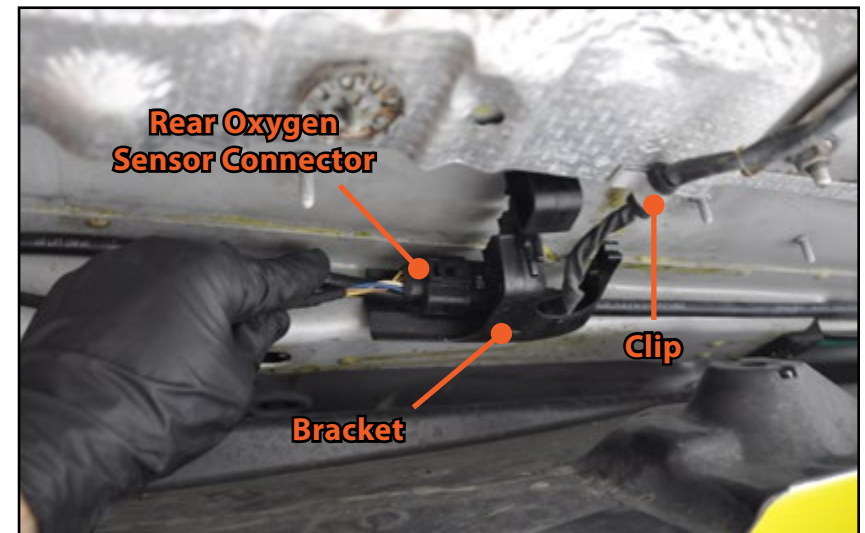

[Table of Contents](#)

REMOVING THE STOCK DOWNPIPE

Step 19: Oxygen Sensor Wrench

Remove the rear oxygen sensor and set it aside.




Step 20: Flat Blade Screwdriver, Torx Drivers: T25, T30

Remove the belly pan or skid plate from the vehicle, whichever you have installed. They are typically secured around the perimeter with 1/4 turn fasteners or Torx screws.

NOTE

If your vehicle is equipped with a CBFA engine you **MUST** remove the third oxygen sensor before continuing to the [next step](#). The third oxygen sensor is located between the turbo outlet and the catalytic converter.

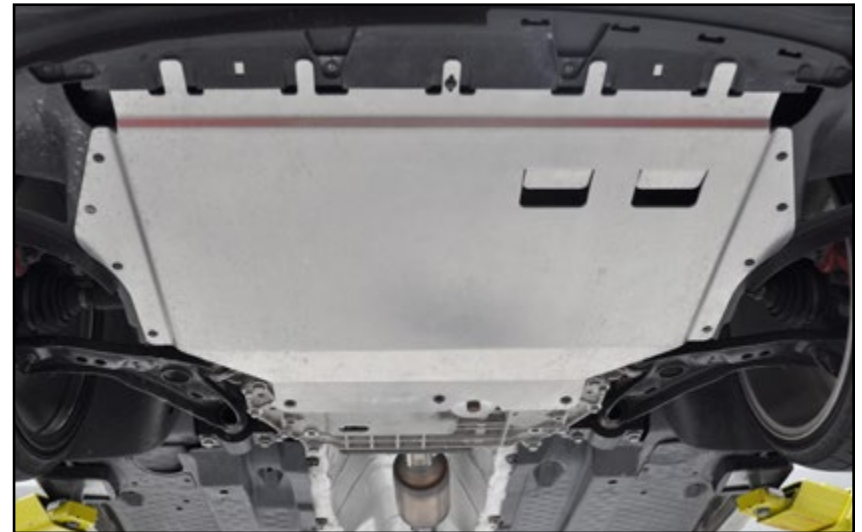


[Table of Contents](#)

REMOVING THE STOCK DOWNPIPE

Step 21: 3/8" Drive Ratchet, 17mm Socket

Loosen and remove the two bolts which secure the CV axle shield to the engine, then remove the shield from the vehicle.

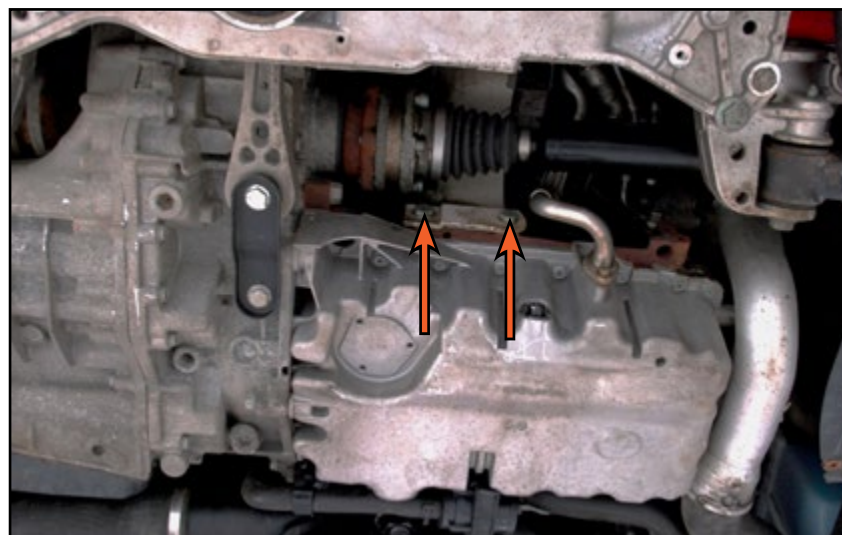


Step 22: 16mm Wrench

Loosen and remove the two lower nuts on the turbo outlet flange.

TECH TIP

Spray the nuts with penetrating oil and allow the oil to soak in before attempting to remove them.

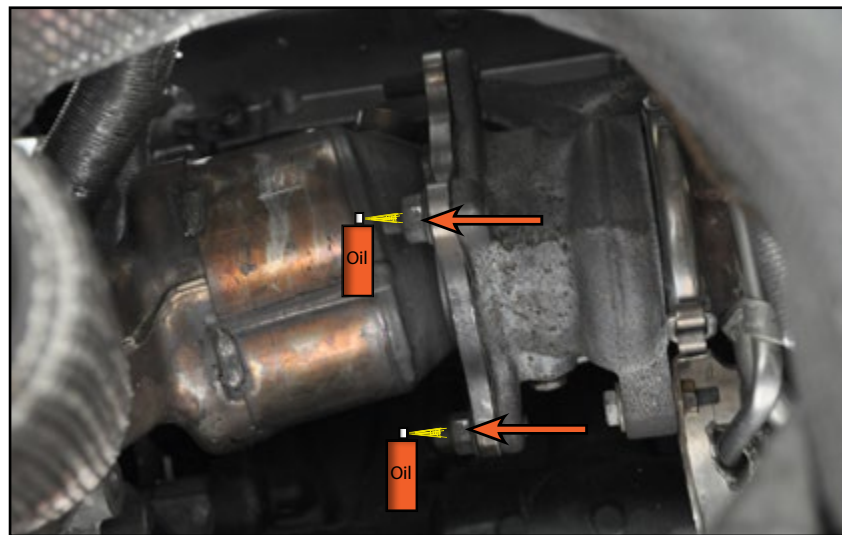


[Table of Contents](#)

REMOVING THE STOCK DOWNPIPE


Step 23: 3/8" Drive Ratchet, 13mm Socket

Support the rear of the downpipe/converter assembly with a jackstand or similar equipment, then remove the four nuts securing each chassis brace and remove them from the vehicle.

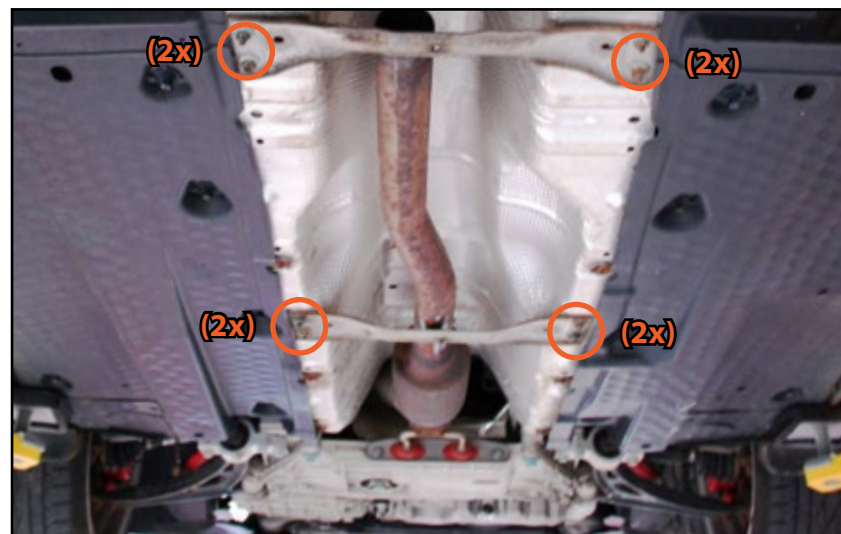

Step 24: 3/8" Drive Ratchet, 13mm Socket


Remove the two bolts which secure the downpipe bracket to the crossmember.

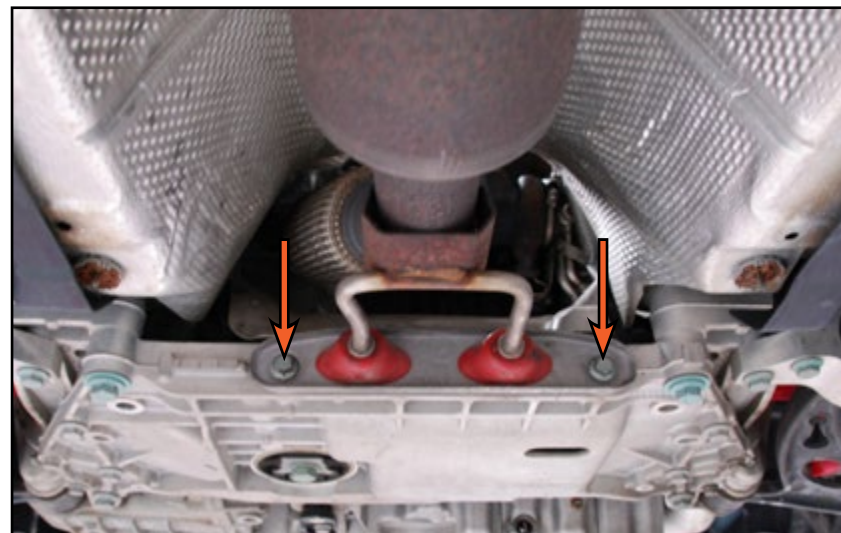[Table of Contents](#)

REMOVING THE STOCK DOWNPIPE

Step 25:

To remove the downpipe from the vehicle, first slide the converter off of the studs on the turbo outlet flange, then twist the downpipe counter-clockwise approximately 90 degrees and pull the downpipe out of the vehicle.

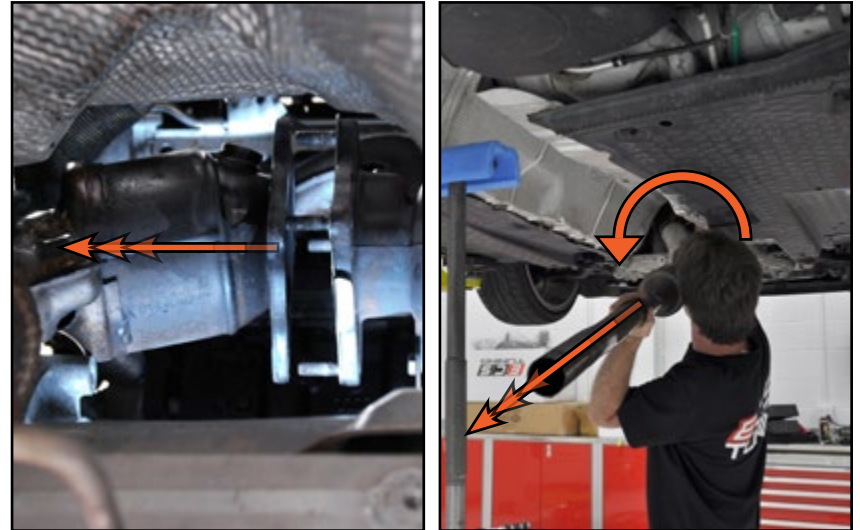

Step 26: Exhaust Pipe Hanger Remover Pliers

Remove the mounting bracket from the stock downpipe.

[Table of Contents](#)

INSTALLING THE NEW DOWNPIPE

Step 1:



Please note that once the downpipe is installed and positioned properly, you must tighten the clamps, hangers, bolts, and nuts before continuing on.

It is also **EXTREMELY** important that you support the downpipe components from below during this installation in order to eliminate the risk of damaging the flex connection. This can be easily achieved with jackstands, or you can have an assistant hold the system in place.

Step 2:

Carefully unpack your new downpipe and lay it out on the floor, locating everything in its installation position.

At each of the slip connections, fit the pipes together to make sure they slide together easily. If they do not slide together easily, inspect the ends of the pipes for any slight distortion or bending (this is sometimes impossible to avoid during shipping). Using a ball peen hammer, gently tap on the ends of the pipes to straighten them and recheck fit. Once all of the slip connections slide together easily, proceed with the [next step](#).

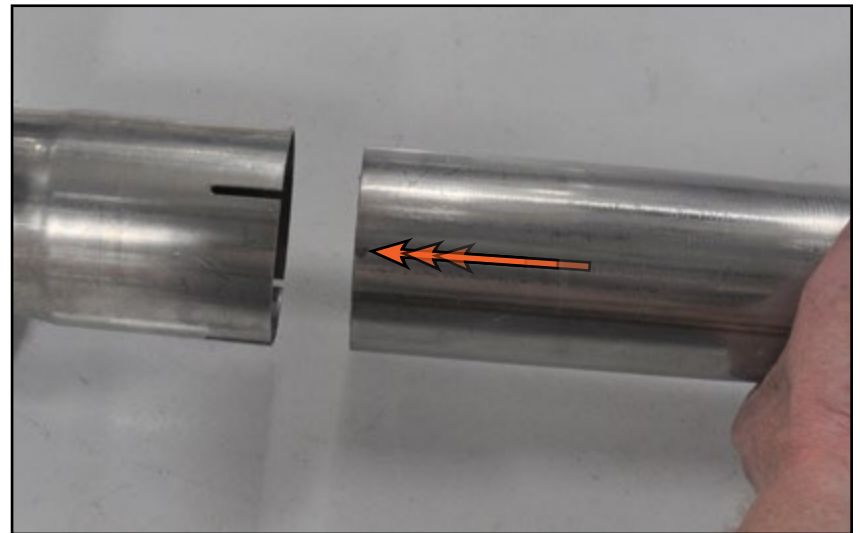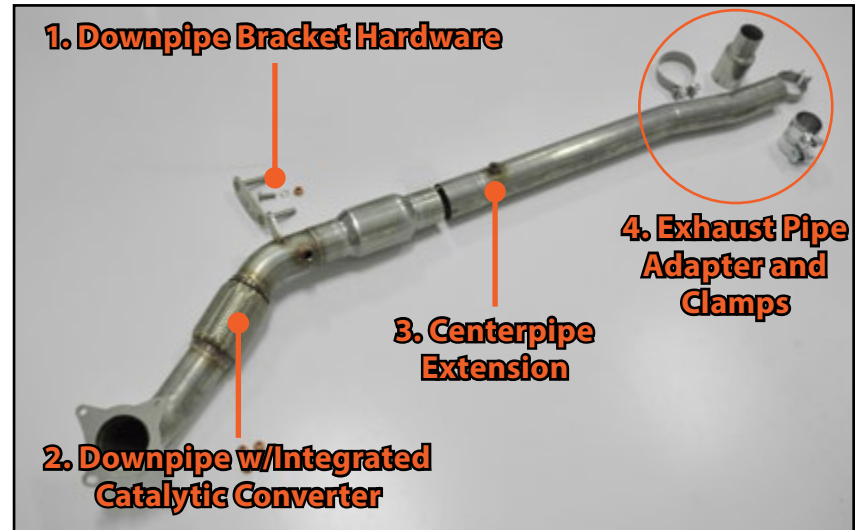


[Table of Contents](#)

INSTALLING THE NEW DOWNPIPE

Step 3:

Place the new gasket onto the turbo outlet flange with the tab aligned on the bottom and facing towards the turbo housing.

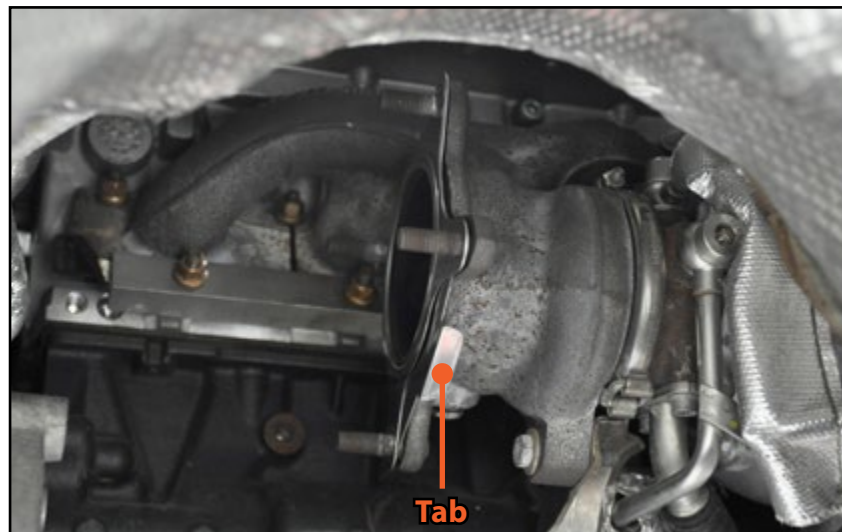


Step 4:

Press the new downpipe bracket into the rubber mounts as shown.

NOTE

Please note that brackets must be installed in such a way that the curved edges of both the OE bracket and the ECS bracket will be on the top when installed on the vehicle.

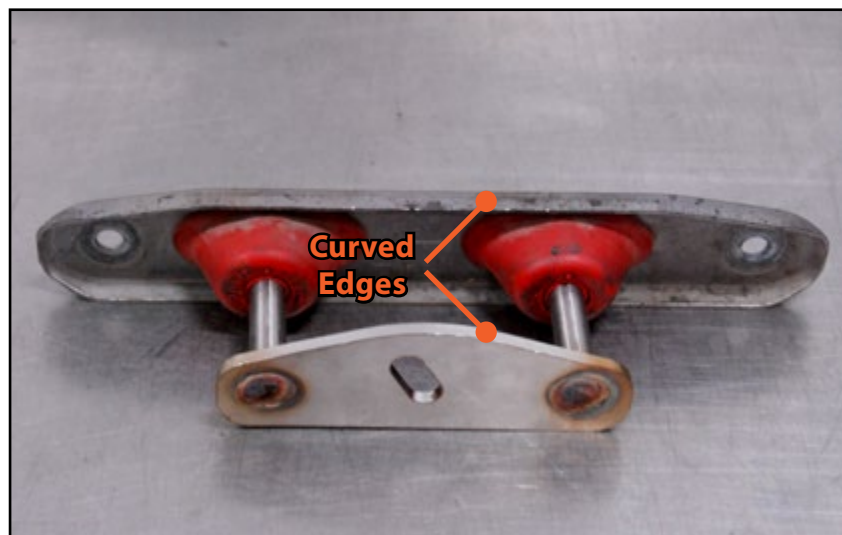

[Table of Contents](#)



INSTALLING THE NEW DOWNPIPE

Step 5:

Apply a small amount of the included “never-seize” paste to the threads on the included bolt before inserting it through the bracket and into the hole on the downpipe, then secure it with the nut. Be sure to leave the fasteners loose at this time.

Step 6: Torque Wrench, 13mm Socket


Install the downpipe onto the turbo outlet in the reverse order of removal. Install the two bolts into the downpipe mounting bracket, then torque them to 25 Nm (18.4 Ft-lbs).

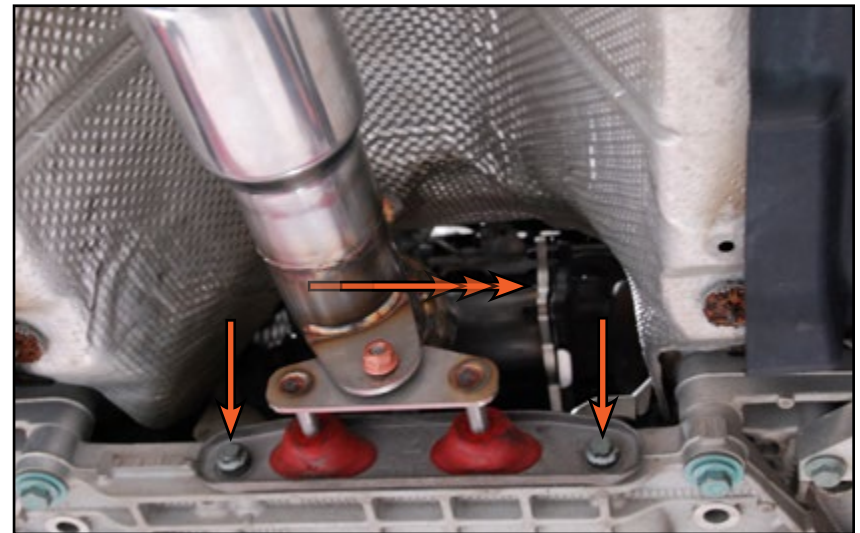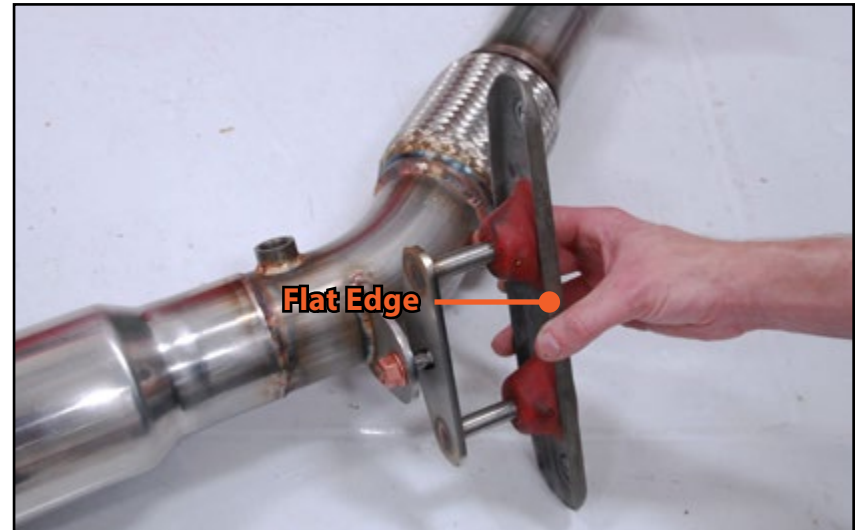[Table of Contents](#)

INSTALLING THE NEW DOWNPIPE

Step 7: Torque Wrench, 16mm Socket

Install the four new nuts onto the turbo outlet flange studs, and torque them to 40 Nm (29.5 Ft-lbs).

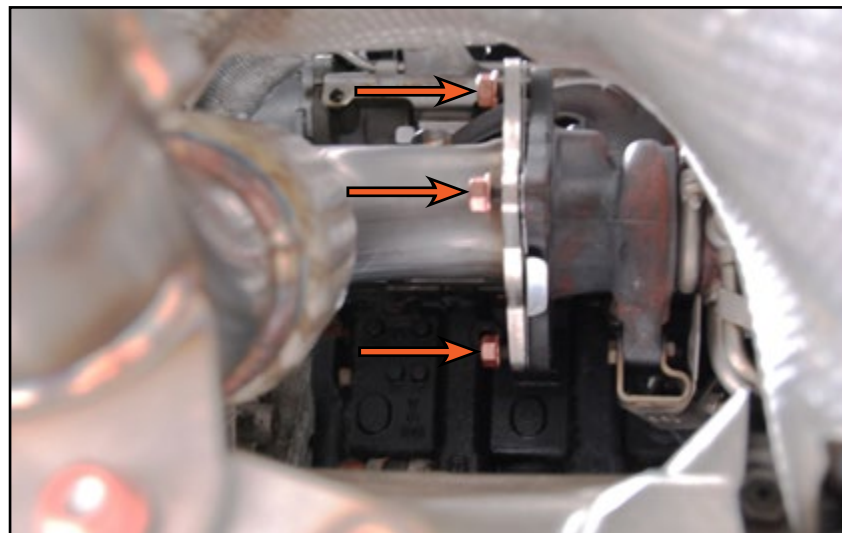


Step 8: Torque Wrench, 16mm & 19mm Sockets, 17mm Wrench

Apply a small amount of the included “never-seize” paste to the threads on the oxygen sensor sealing plug, then thread the plug and washer into the unused bung on the downpipe, and torque to 30 Nm (22.1 Ft-lbs). Tighten the bolt which secures the downpipe to the mounting bracket.

NOTE

If your vehicle is equipped with a CBFA engine this plug will NOT be used, simply install the third oxygen sensor in its place.

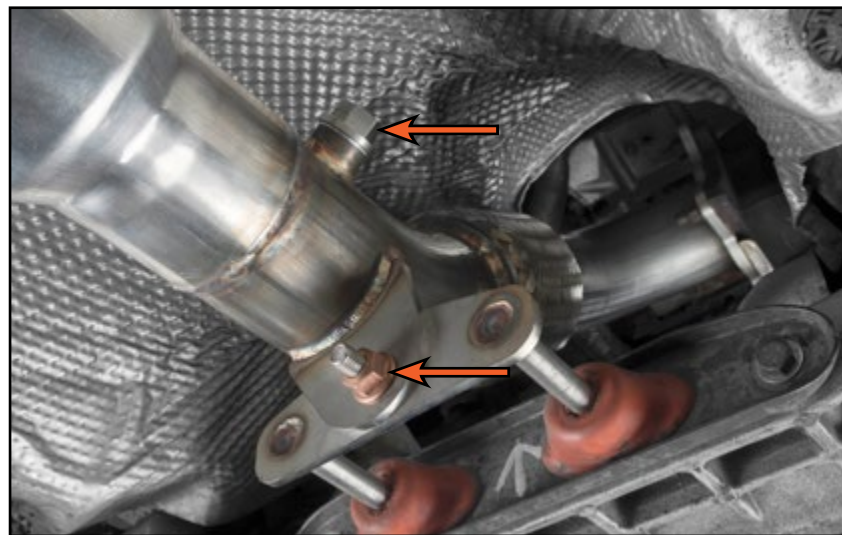

[Table of Contents](#)

INSTALLING THE NEW DOWNPIPE


Step 9:

Slide the new exhaust clamp over the centerpipe extension, be sure to orient the clamp so that the clamp bolt head faces as shown in the photo.



Step 10:

Slide the centerpipe extension over the downpipe, twist the pipe if necessary to allow it to slide into place.

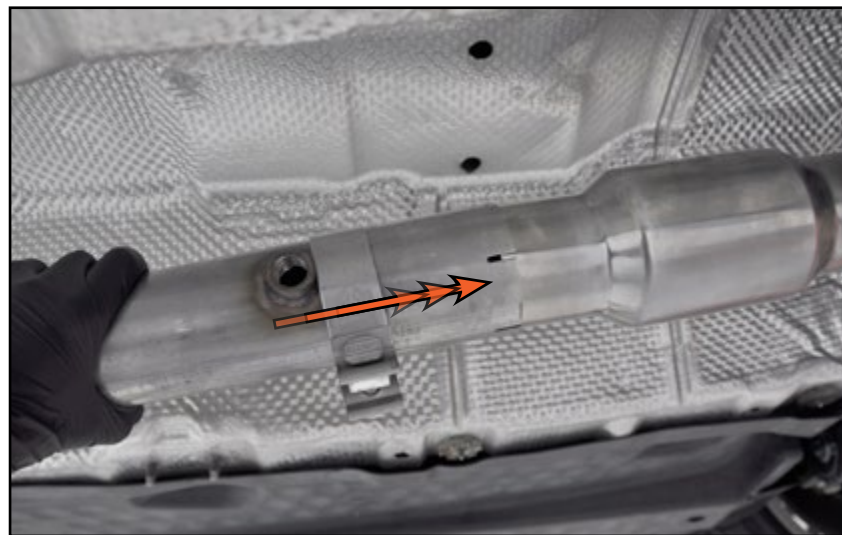[Table of Contents](#)

INSTALLING THE NEW DOWNPIPE

Step 11:

Tighten the clamp on the centerpipe extension.


Reinstall the rear oxygen sensor.

Reinstall the CV axle shield and the belly pan/skid plate.

Reinstall the belly pan or skid plate on the vehicle.

Reinstall the cover plate, front oxygen sensor, and MAF sensor.

Reinstall the intake duct and engine cover.

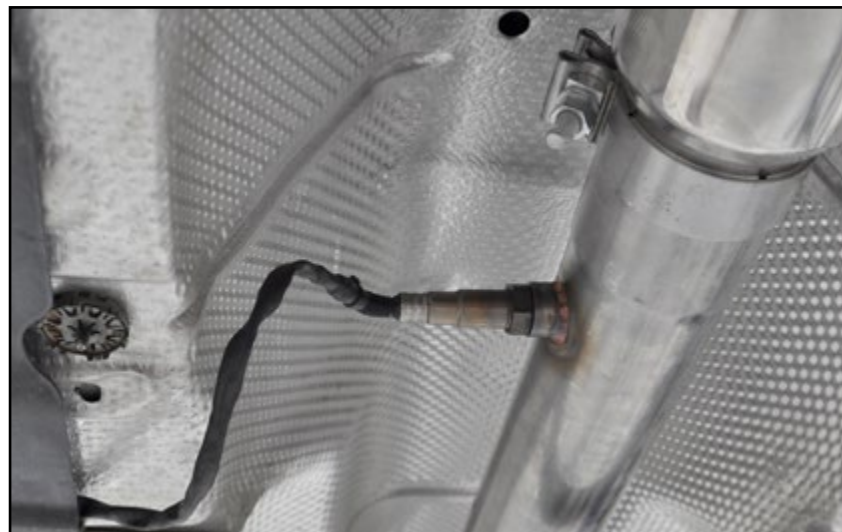

Step 12:



If you purchased a **Downpipe** only, reinstall both chassis braces and install the provided exhaust pipe adapter and clamps as shown in the photo. Your installation is now complete.



If you purchased a **Turbo-Back** system, reinstall the front chassis brace only and continue to the [next step](#).



[Table of Contents](#)

INSTALLING THE NEW CAT-BACK

Step 1:


Please note that during this installation, you will be installing the exhaust from front to back **WITHOUT** tightening any of the clamps, hangers, bolts, or nuts. Once the system is installed, we will then show you how to position the entire system properly, and then you will tighten the clamps, hangers, bolts, and nuts **AFTER** that is complete.

It is also **EXTREMELY** important that you support the exhaust components from below as you are installing the system. This can be easily achieved with jackstands, or you can have an assistant hold the system in place.

Step 2:

Carefully unpack your new exhaust system and lay it out on the floor, locating everything in its installation position. Leave the protective coverings installed so you do not scratch the mufflers or pipes.

At each of the slip connections, fit the pipes together to make sure they slide together easily. If they do not slide together easily, inspect the ends of the pipes for any slight distortion or bending (this is sometimes impossible to avoid during shipping). Using a ball peen hammer, gently tap on the ends of the pipes to straighten them and recheck fit. Once all of the slip connections slide together easily, proceed with the [next step](#).

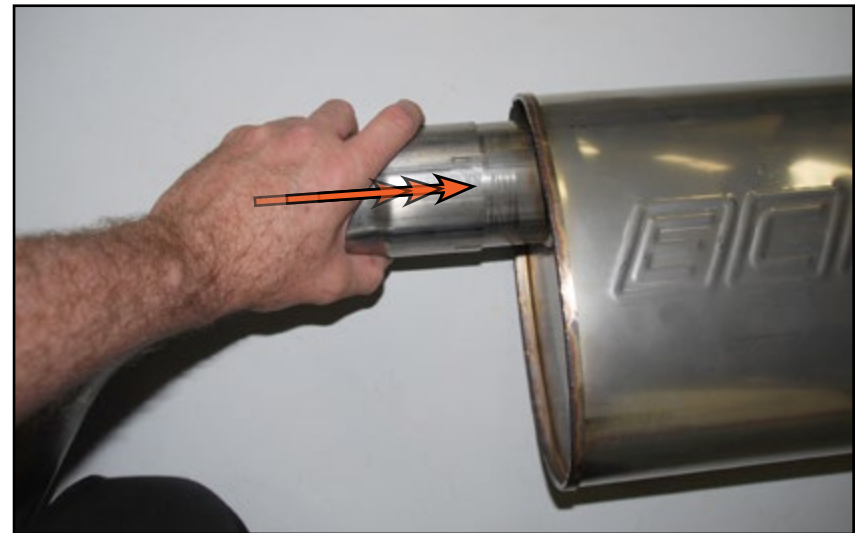

[Table of Contents](#)

INSTALLING THE NEW CAT-BACK

Step 3:

Spray each of the exhaust hangers with silicone spray lube in order to make it easier to install.



Step 4:

Slide the new exhaust clamp over the muffler inlet pipe, be sure to orient the clamp so that the clamp bolt head faces as shown in the photo.



[Table of Contents](#)


INSTALLING THE NEW CAT-BACK

Step 5:

Lift the muffler into the vehicle, then slide the pipe into place on the centerpipe extension, leaving the clamp loose at this time. Insert the brackets into the rubber hangers (arrows), then support the muffler from below with jackstands or similar equipment.

NOTE

If you purchased a **Cat-Back** only, install the provided exhaust pipe adapter and clamps onto the downpipe/converter assembly.

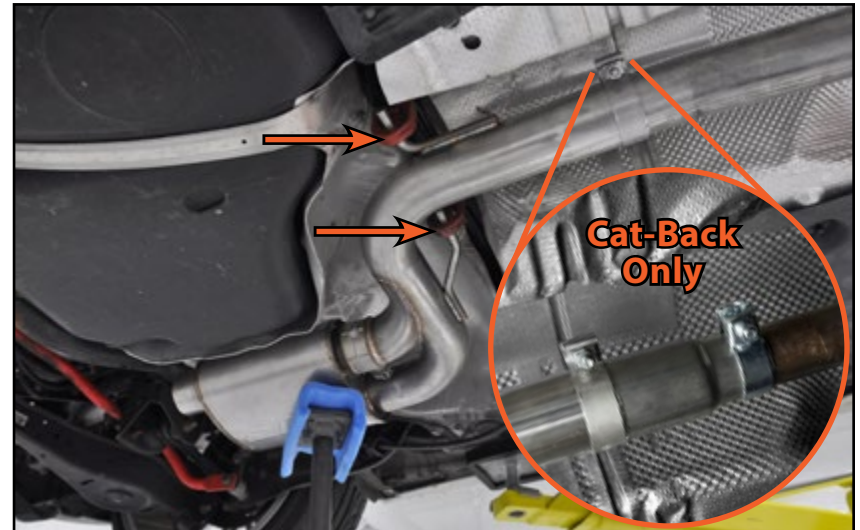

Step 6:

Insert the combination exhaust clamp/hanger into the rubber hanger on the vehicle, then slide the clamp end over the muffler outlet. Leave the clamp loose at this time.



[Table of Contents](#)

INSTALLING THE NEW CAT-BACK

Step 7:

Slide the tailpipe section onto the muffler outlet, twisting the pipe as necessary to allow it to slide on.

Step 8:

Slide the new exhaust clamp over the Y-Pipe, be sure to orient the clamp so that the clamp bolt head faces as shown in the photo. Slide the Y-Pipe hanger bracket into the exhaust hanger on the vehicle, then slide the Y-Pipe onto the tailpipe section, twisting the pipes as necessary to allow them to slide together.



[Table of Contents](#)

INSTALLING THE NEW CAT-BACK


Step 9: 3/8" Drive Ratchet, 15mm Socket

Rotate the tailpipe section downward and place each exhaust tip assembly (tip, integrated clamp, and adjusting insert) onto the end, but leave the adjustment clamps loose at this time. Rotate the tailpipe section upwards again, then proceed to the next step.



Step 10:


The most important part of these next few steps is patience. Begin here by orienting all of the exhaust hangers as shown in the photo. The exhaust hangers should be inclined toward the front of the vehicle so that lower hole is approximately 10-15mm forward of the upper hole, this will allow the hangers to pivot backwards as the system heats up and expands.

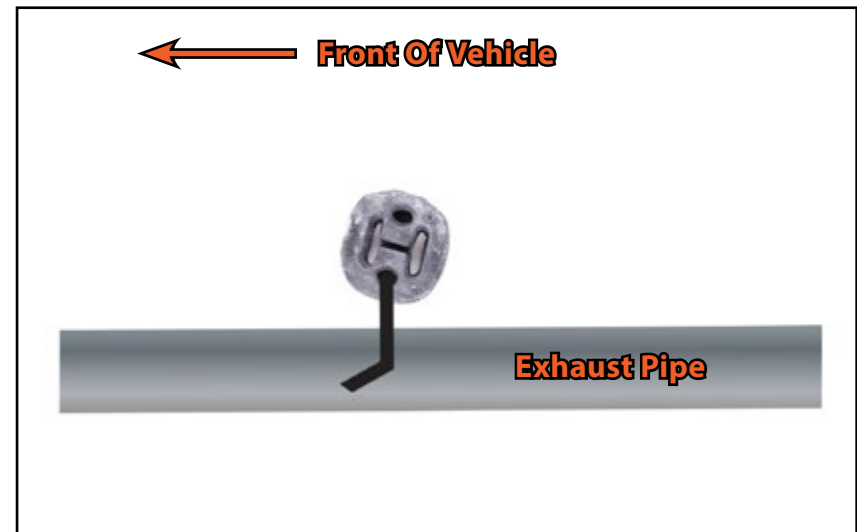[Table of Contents](#)

INSTALLING THE NEW CAT-BACK

Step 11:


Closely inspect the front of the exhaust system and check for clearances between the exhaust pipe and the chassis and drivetrain components. Pay close attention to where the pipe travels over the chassis braces.

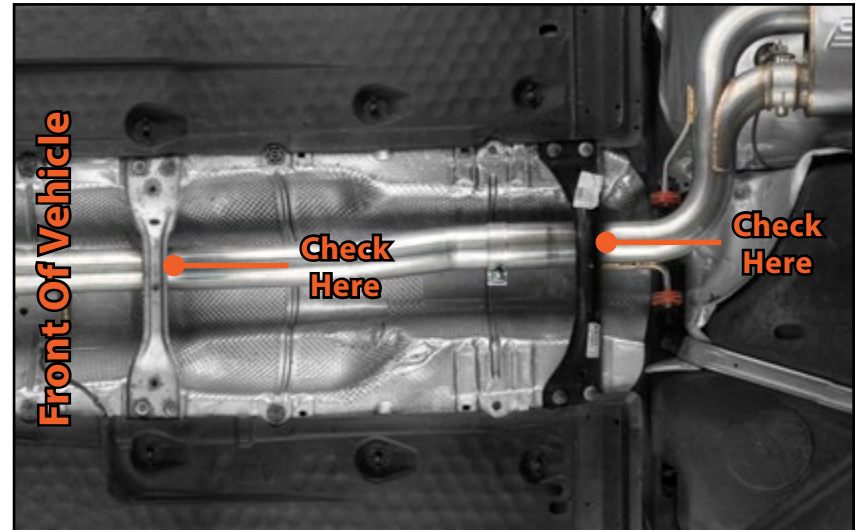

Step 12: 3/8" Drive Ratchet, 15mm Socket

You can now tighten the forward exhaust clamps by hand until they are "snug", but **DO NOT USE AN IMPACT WRENCH** and do not fully tighten them at this time.

Next, inspect the middle of the exhaust system and check for clearances between the center section and the chassis and drivetrain/suspension components. Pay close attention to where the center section travels around the fuel tank.

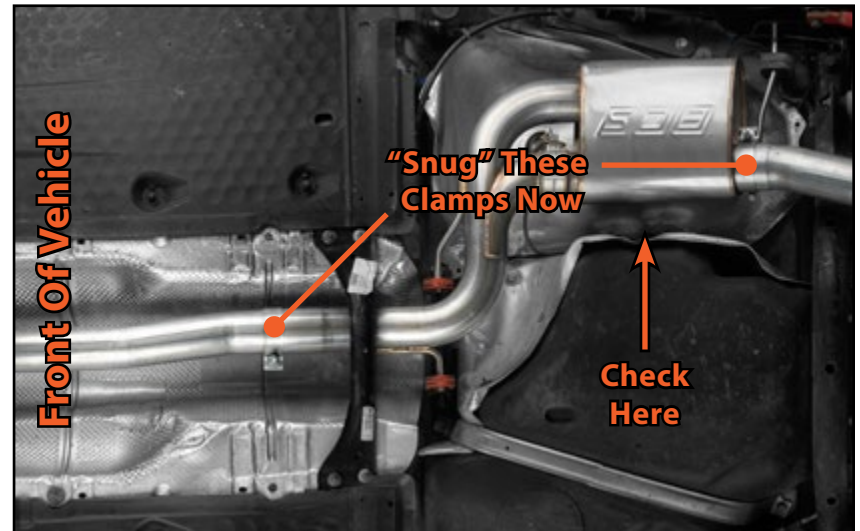

[Table of Contents](#)

INSTALLING THE NEW CAT-BACK

Step 13: 3/8" Drive Ratchet, 15mm Socket

You can now tighten the rear exhaust clamps by hand until they are "snug", but **DO NOT USE AN IMPACT WRENCH** and do not fully tighten them at this time.

Finally, inspect the rear of the exhaust system and check for clearances between the pipe and the chassis and drivetrain/suspension components. Pay close attention to where the rear pipe travels around the rear crossmember, and ensure that the the exhaust tips are centered in the rear bumper cut-out.


Step 14: 3/8" Drive Ratchet, 13mm & 15mm Sockets

Once all of your adjustments are complete you can tighten all of the exhaust clamps. Adjust the exhaust tip so they are centered in the bumper cut out, then torque the clamps to 19 Nm (14 Ft-lbs).

Reinstall the rear chassis brace.




Your exhaust system installation is now complete, please continue to [Page 39](#) to install the Remote Exhaust Valve Controller.

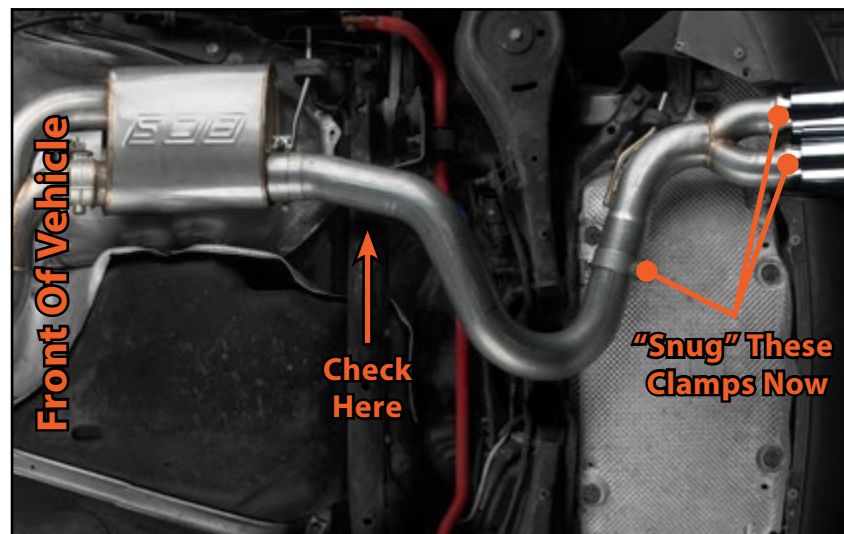

[Table of Contents](#)

REMOTE EXHAUST VALVE CONTROLLER KIT CONTENTS

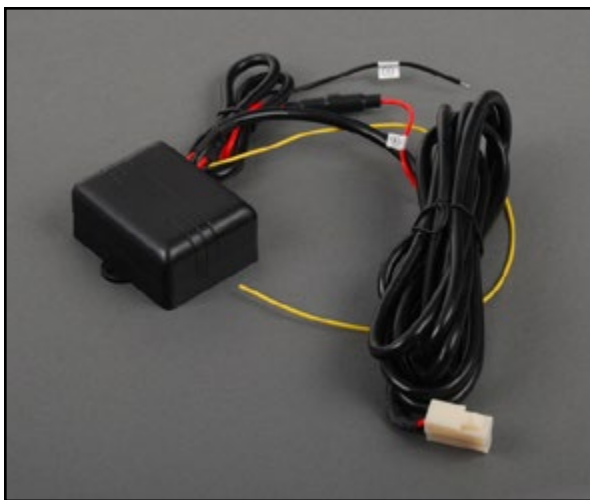


Control Module with Wiring Harness



Vacuum Line



Remote Controllers (2)

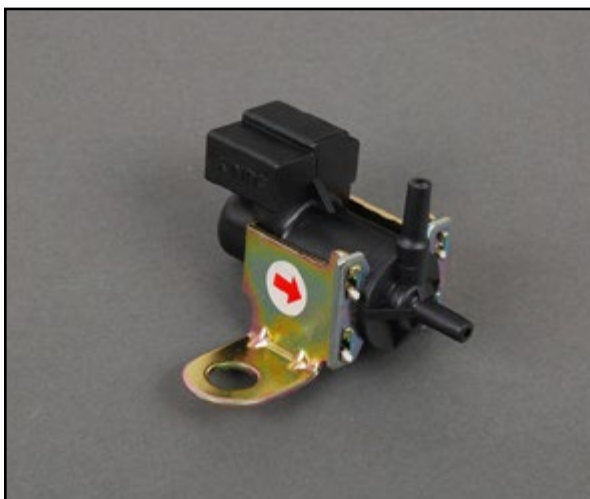

Solenoid Vacuum Valve




Check Valve



Vacuum Line T-Fitting

[Table of Contents](#)

REMOTE EXHAUST VALVE CONTROLLER SYSTEM DIAGRAM

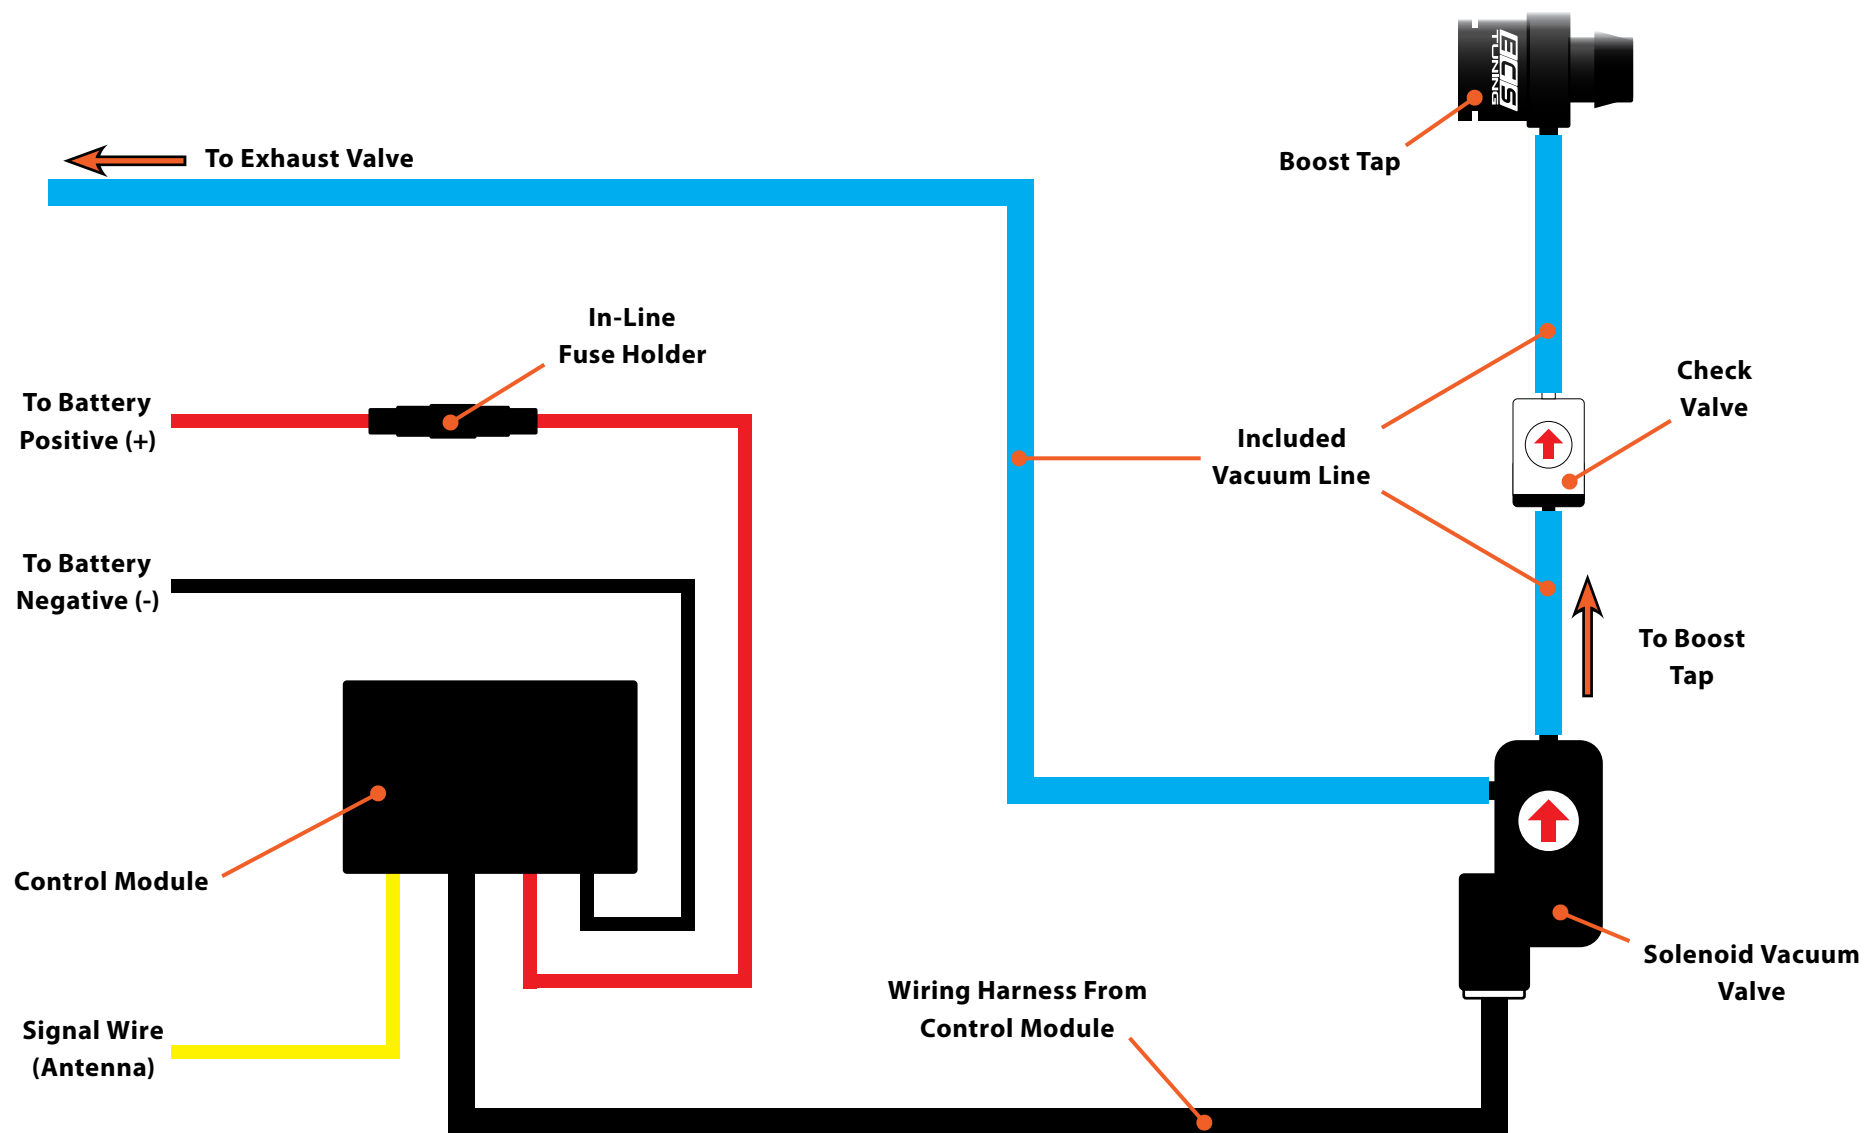

[Table of Contents](#)

INSTALLING THE REMOTE EXHAUST VALVE CONTROLLER

Step 1:

The Remote Exhaust Valve Controller allows the user to open and close the exhaust valve with the push of a button. It utilizes a vacuum valve that runs off of the vehicles vacuum system, and is activated by the included remote control switch.

Please familiarize yourself with the Kit Contents on [Page 39](#) and the System Diagram on [Page 40](#) before proceeding to the next step.



In order to install this vacuum control valve you **MUST** already have a Boost Tap installed on the vehicle, if you do not have one they can be found on www.ecstuning.com: [ES#2718328](#).



Step 2:

3/8" Drive Ratchet, T30 Torx Bit Socket

Remove the bolt which secures the oxygen sensor wiring harness bracket to the firewall near the brake fluid reservoir, then install the solenoid vacuum valve and the wiring harness bracket into place with the same bolt. **DO NOT** install the hose and check valve during this step.

NOTE

The check valve can be installed anywhere between the solenoid vacuum valve and the vacuum source. Take into consideration the amount of line needed between these components before cutting the hose to prevent excess waste.



Bolt for Oxygen Sensor
Wiring Harness Bracket

[Table of Contents](#)

INSTALLING THE REMOTE EXHAUST VALVE CONTROLLER

Step 3:

If you do not currently have a Boost Tap installed on your engine, the ECS Tuning Boost Tap can be found on ecstuning.com: [ES#2718328](#).

If you already have a boost tap installed, measure the appropriate length of line required to connect the solenoid vacuum valve to one of the vacuum ports on the boost tap, then cut the line to that length. Install the supplied check valve in-line **ANYWHERE** between the valve and the boost tap, ensuring that the arrow on the check valve is pointed **TOWARDS** the boost tap.




If you were able to utilize a vacuum port on the Boost Tap, please skip to [Page 43](#). If both vacuum ports are currently in use on your Boost Tap, please proceed to Step 4 before continuing.

Step 4:

If both of the vacuum ports on your boost tap are currently being used for other components, you can use the supplied "T-fitting" to splice into one of the vacuum hoses running from the boost tap.


Using the photo for reference, cut the line and use the T-fitting to attach the vacuum line from the solenoid vacuum valve. Measure the appropriate length of line required to connect the solenoid vacuum valve to the T-fitting, then cut the line to that length. Install the supplied check valve in-line anywhere between the valve and the boost tap, ensuring that the arrow on the check valve is pointed **TOWARDS** the T-fitting.

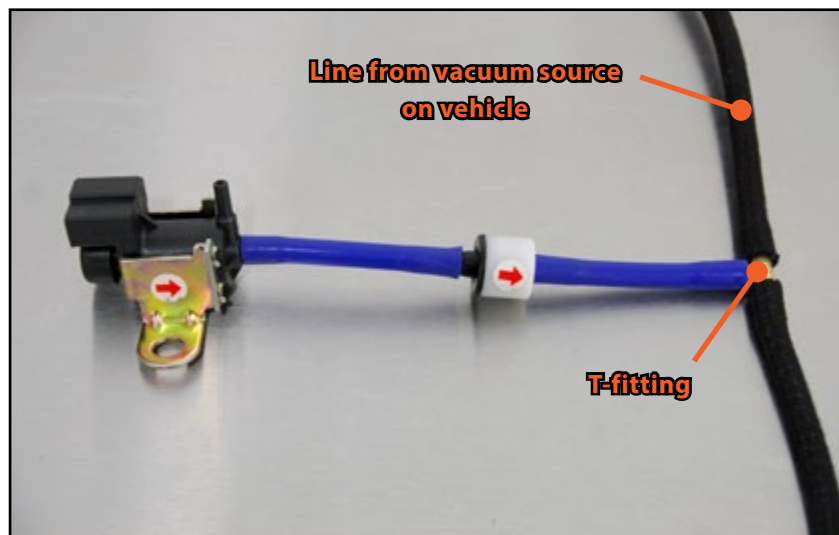
[Table of Contents](#)

INSTALLING THE REMOTE EXHAUST VALVE CONTROLLER


Step 5:

Attach the vacuum line for the exhaust valve to the port on the solenoid vacuum valve. Route the line down away from any moving or hot components and out through the bottom of the vehicle.

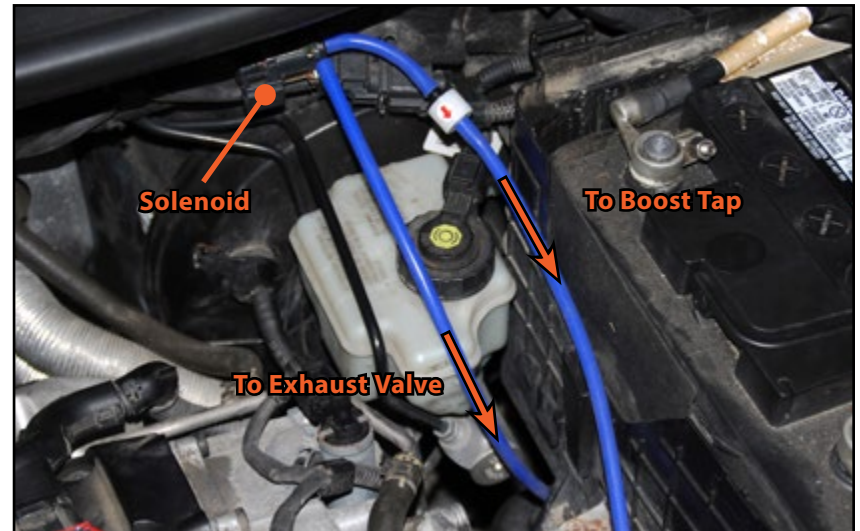

Step 6:


Pull the vacuum line down through the opening in the subframe as shown in the photo, ensuring that the hose is clear of any moving or hot parts, including suspension, engine and exhaust components.

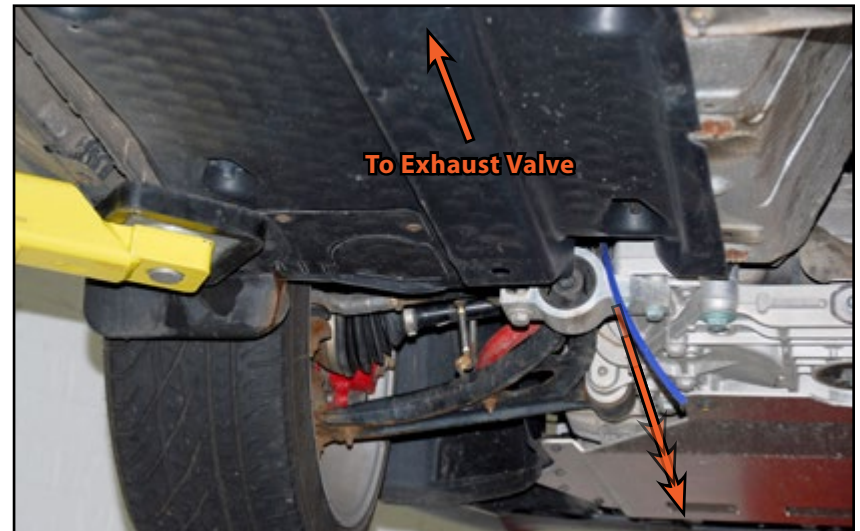[Table of Contents](#)

INSTALLING THE REMOTE EXHAUST VALVE CONTROLLER

Step 7: 3/8" Drive Ratchet, 10mm Socket

Loosen the four plastic shouldered hex nuts on the inner side of the left underbody panel, then pull down on the open end of the panel and route the vacuum line underneath as shown in the photo. Reinstall the four nuts after the line has been routed.

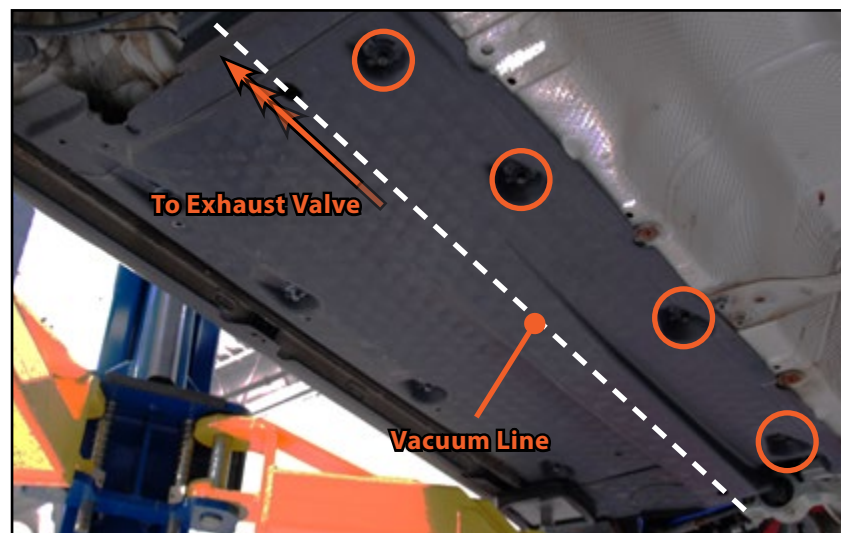

Step 8:

Pull the vacuum line through the panel opening, run the line over the heat shield as shown in the photo, then attach the end to the vacuum port on the exhaust valve. Secure the line away from the exhaust with a plastic tie.

[Table of Contents](#)

INSTALLING THE REMOTE EXHAUST VALVE CONTROLLER

Step 9:

You have the choice of where to mount your control module, for this installation we chose to install it onto the battery cover. This can be achieved by drilling two 1/8" holes into the battery cover and attaching the control module with a plastic tie.

If you choose to mount the control module somewhere else on the vehicle, you **MUST** ensure that it is protected from the elements, as well as any moving/hot components.

CAUTION

DO NOT drill into the battery cover without first removing it from the vehicle, this will prevent accidentally drilling into the battery.



Step 10:

For this installation we chose to wire our control module directly to the battery posts, to do so simply route the positive and negative wires toward the battery posts, then attach the wires using crimp-style ring connectors.

You may choose to use a switched power source to supply power to the control module, this can be achieved by wiring the power supply to a switched 12V power source, such as the cigarette lighter.

NOTE

The signal wire (yellow) acts as the antenna for the remote controller, and remains unattached.

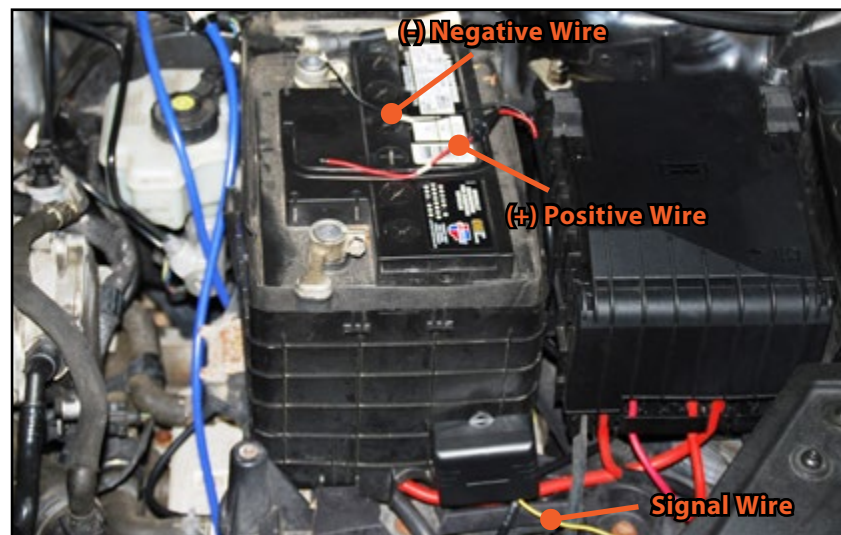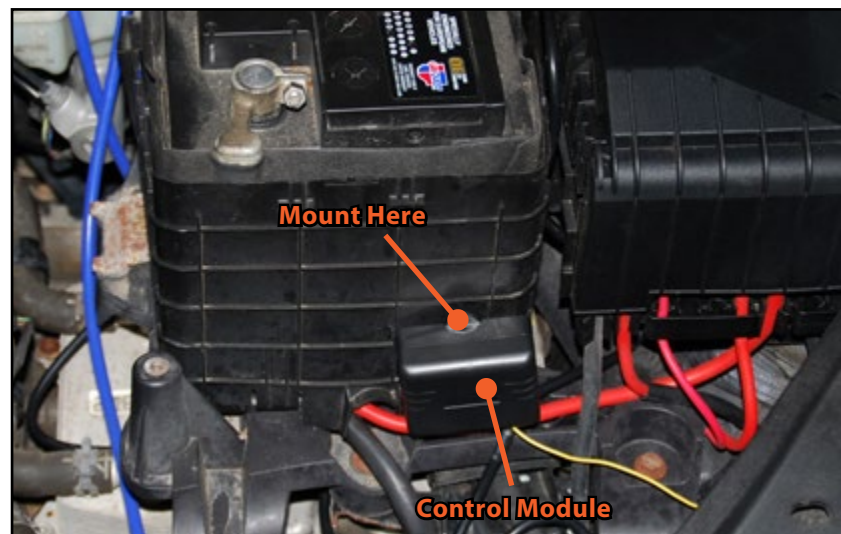


[Table of Contents](#)

INSTALLING THE REMOTE EXHAUST VALVE CONTROLLER

Step 11:

Plug the end of the wiring harness from the control module into the solenoid vacuum valve. Finally, perform a system check by starting the engine, then press the “unlock” button on the remote to open the valve, and press the “lock” button to close the valve. You should be able to hear a difference in both exhaust tone and volume when the valve is opened or closed.

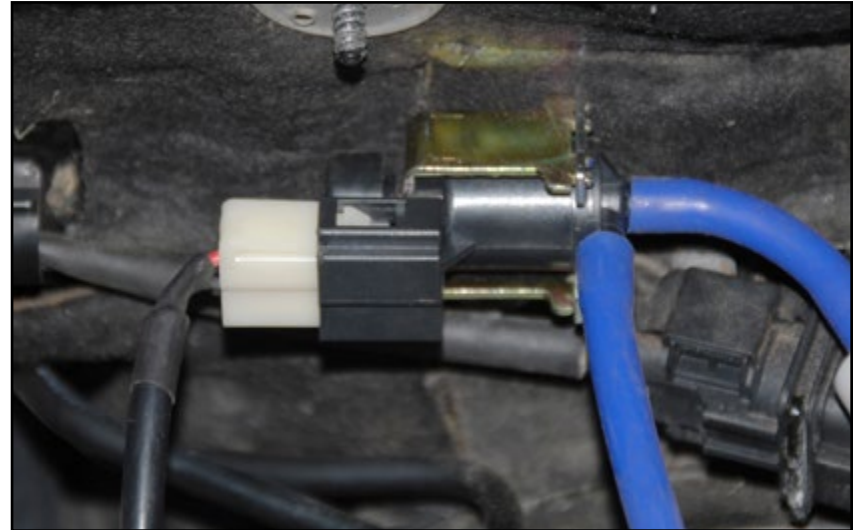

Step 12:

Your MK5 ECS Tuning Valved Exhaust installation is complete!




[Table of Contents](#)

USING THE VAG CONNECTOR TOOL

Step 1:

These connectors are commonly referred to as “Push and Pull” connectors, in reference to the method used to disconnect them.

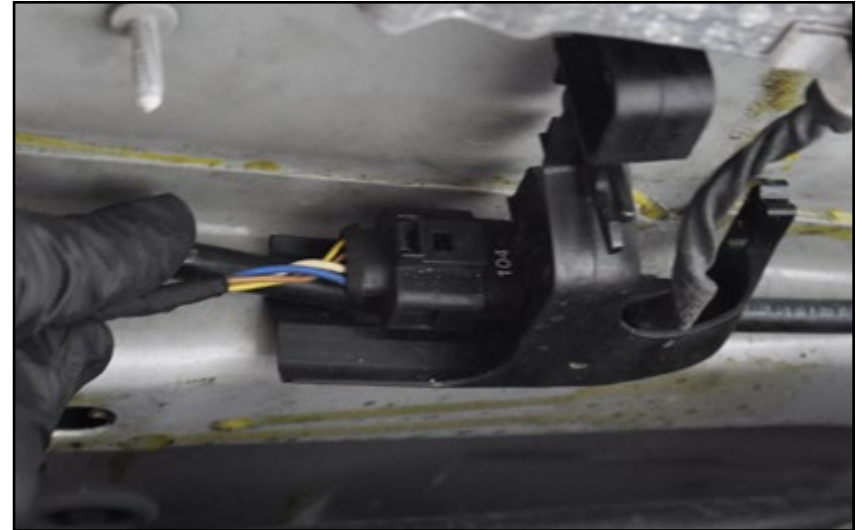



Step 2:

To disconnect one of these connectors, follow this procedure:

1. Engage the connector release tool into the connector housing.
2. Push inward gently on the connector.
3. While holding pressure inward on the connector, pull up on the handle of the release tool.
4. Pull the connector off of the component and move the harness out of the way.





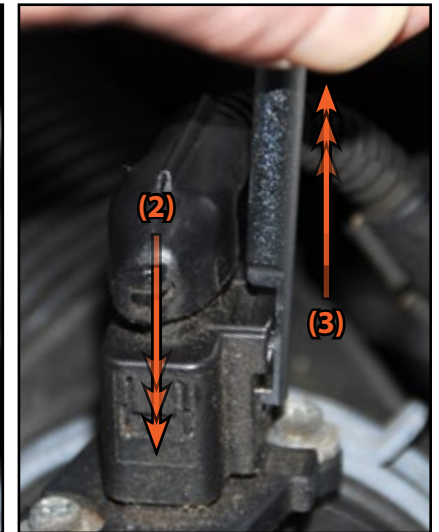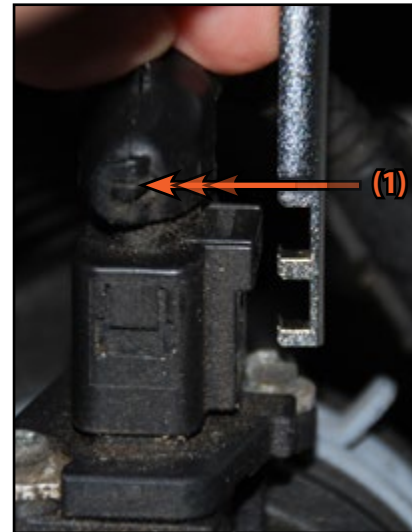















To return to the **Downpipe** removal instructions, simply click [HERE](#).



[Table of Contents](#)

SCHWABEN - BUILD THE ULTIMATE TOOL COLLECTION

At ECS Tuning, we carry a line of high quality Schwaben Tools and Equipment to help you build your ultimate tool collection. Never before has affordability and quality been so closely related. Our entire Schwaben line is subjected to strict in house testing for strength and durability. See what we have to offer and equip your garage without breaking the bank.

| | | | | | |
|--|--|---|--|---|---|
|  |  |  |  |  |  |
|  | <u>Breaker Bar</u> <u>Creepers</u> <u>Gloves</u> <u>Engine Bars</u> <u>Screwdrivers</u> <u>Pressure Bleeders</u> <u>Lighting</u> <u>Pry Bars</u> <u>Coil Spring Compressors</u> <u>Camber Gauge</u> <u>Hose Pinch Pliers</u> <u>Wheel Bolt Pattern Gauge</u> <u>Ball Joint Separator</u> <u>Vanos Solenoid Socket</u> | <u>Scraper, Hook, & Pick Set</u> <u>Camshaft Tools</u> <u>Fan Clutch Wrenches</u> <u>Tie Rod Tools</u> <u>Brake Fluid Catch Bottle</u> <u>Tubing Cutter</u> <u>Booster Cables</u> <u>Oil Filter Tools</u> <u>Service Carts</u> <u>Battery Charger</u> <u>Stethoscope</u> <u>Battery Terminal Brush</u> <u>Wheel Chocks</u> <u>Torx Sockets</u> | <u>Sockets</u> <u>E-Drive Sockets</u> <u>Car Ramps</u> <u>Torx Drivers</u> <u>Jack Stands</u> <u>Circuit Tester</u> <u>Ratchets</u> <u>Exhaust Hanger Pliers</u> <u>Bubble Flaring Tool</u> <u>Thread Chaser</u> <u>Drain Pans</u> <u>Wrenches</u> <u>Impact Sockets</u> <u>Torque Wrenches</u> |  |  |
|  | | | | |  |
|  | | | | | |
|  |  |  |  |  |  |

[Table of Contents](#)

Your ECS Tuning Exhaust System installation is complete!



These instructions are provided as a courtesy by ECS Tuning

Proper service and repair procedures are vital to the safe, reliable operation of all motor vehicles as well as the personal safety of those performing the repairs. Standard safety procedures and precautions (including use of safety goggles and proper tools and equipment) should be followed at all times to eliminate the possibility of personal injury or improper service which could damage the vehicle or compromise its safety.

Although this material has been prepared with the intent to provide reliable information, no warranty (express or implied) is made as to its accuracy or completeness. Neither is any liability assumed for loss or damage resulting from reliance on this material. SPECIFICALLY, NO WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER WARRANTY IS MADE OR TO BE IMPLIED WITH RESPECT TO THIS MATERIAL. In no event will ECS Tuning, Incorporated or its affiliates be liable for any damages, direct or indirect, consequential or compensatory, arising out of the use of this material.