

## VW/Audi Billet DSG Filter Housing Cap

### Installation Instructions - [Click HERE to Shop](#)



Thank you for purchasing your new billet DSG filter housing cap, we appreciate your business!



### Kit Contents:

Billet Filter Housing Cap (QTY 1)

### **OPTIONAL:**

Heat-Reflective Tape (QTY 1)

### Required Tools:

Spring Clamp Pliers ([ES#2702616](#))




1/4" Drive Ratchet & Socket Set ([ES#2823235](#))

DSG Oil Filter Wrench ([ES#3195027](#))

1/2" Ratchet & 24mm Socket

## Section 1: Removing the Stock DSG Filter Housing Cap

- Step 1**
- Disconnect the negative (-) battery terminal.
  - Remove the engine cover (not shown), intake tube, air box and inlet scoop (highlighted in **GREEN** in **Step 1 photo**).
- Step 2**
- Remove the three 10mm bolts which secure the battery tray into place, then remove the tray.
    - If you have the [Schwaben DSG Oil Filter Wrench](#) it is possible to do this job without removing the battery and the tray.
- Step 3**
- Locate the stock DSG filter housing cap and remove it (24mm socket & ratchet).  
**TECH TIP:** Clean the area around the filter housing to prevent any contaminants from entering the housing when you open it up. Place a towel or rag around the housing to soak up any fluid you may spill while you work.
- Step 4**
- We recommend servicing your DSG transmission while you are installing the new billet housing cap, especially if the fluid is looking dark or dirty.
    - Instructions on how to service your DSG transmission can be found under the "Installation" tab on [ES#11968](#) or [ES#2536026](#).

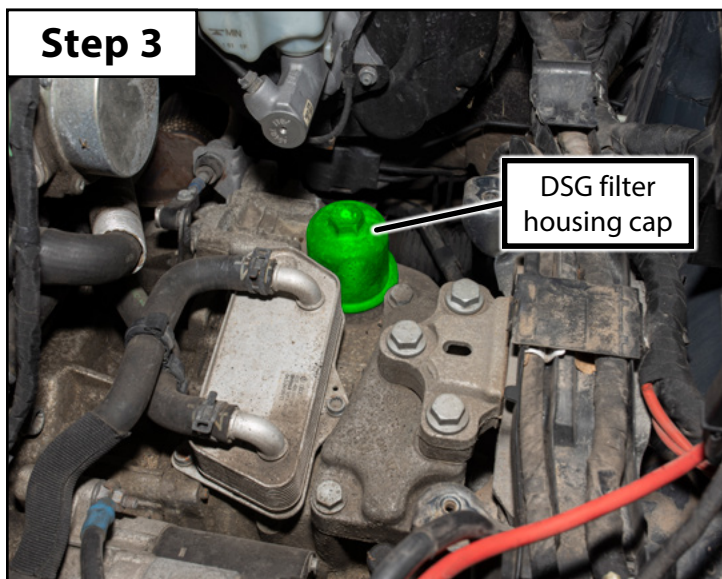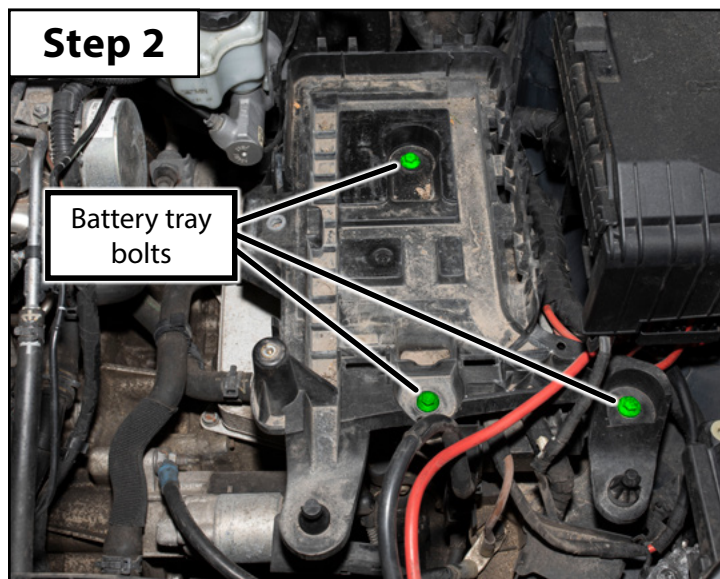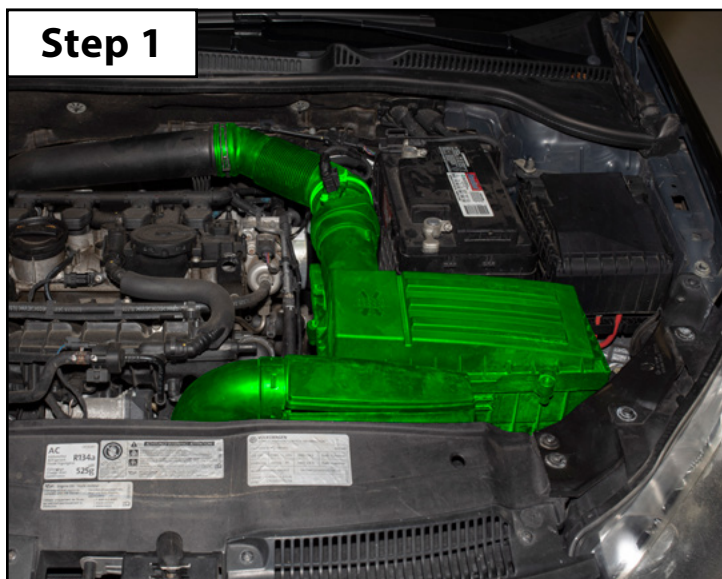



## Section 2: Installing the New Billet DSG Filter Housing Cap

- Step 1**
- Lubricate and install the o-ring onto the new billet housing cap.
- Step 2**
- Replace the DSG filter if you are servicing your transmission at this time.
- Step 3**
- Install the billet housing cap, torque to 22 Ft/lbs (30 Nm).
  - Reinstall the battery tray, battery, intake system and engine cover.

