



Skill Level 1 - Easy

Audi B9 S4 Gloss Black ABS Side Skirts Installation Instructions - [ES4056545](#)




**Thank you for purchasing your vacuum formed ABS component
from ECS Tuning, we appreciate your business!**



Proper service and repair procedures are vital to the safe, reliable operation of all motor vehicles as well as the personal safety of those performing the repairs. Standard safety procedures and precautions (including use of safety goggles and proper tools and equipment) should be followed at all times to eliminate the possibility of personal injury or improper service which could damage the vehicle or compromise its safety.


Section 1: Installing the ABS Side Skirts

- Step 1** • Prep the mounting surface by thoroughly washing and drying the entire mounting surface area on the underside of the side skirts.
- Step 2** • Carefully lay the ABS component into place on the vehicle, ensuring that it is located and aligned properly.
- This is where a second set of hands can prove extremely beneficial; Have a second person hold the side skirt in place to ensure it remains properly aligned while installing the screws
 - If you're working alone, you can use blocks to support the underside of the side skirt and tape to ensure the side skirt remains level while installing the screws.
- Step 3** • We highly recommend applying a corrosion inhibitor such as anti-seize to the ends of the screws before installation to protect the holes from corrosion.
- Step 4** • Starting at the rear and moving towards the front, install six of the provided T30 screws through the six angled holes in the side skirt and into the body to secure it in place.

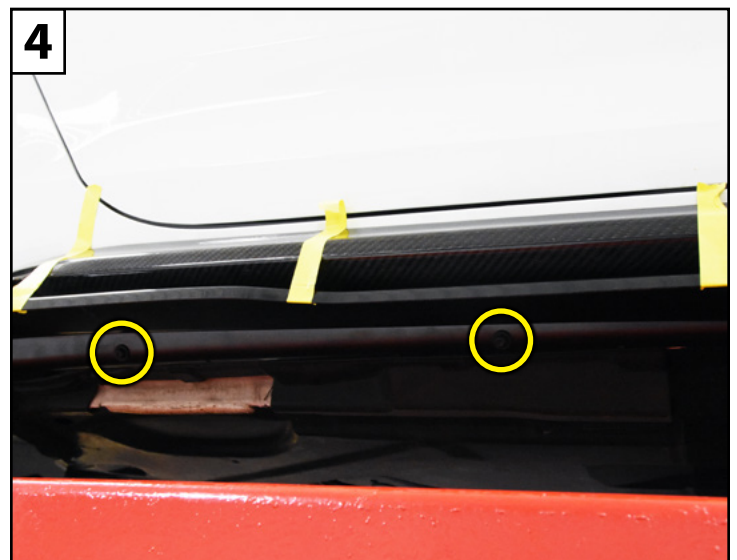

Section 1: Installing the ABS Side Skirts

- Step 5** • Now that the skirt is held into place, you can remove the tape securing it to the vehicle (if applicable).
- Step 6** • Starting at the rear and moving towards the front, install the remaining 12 screws (arrows) through the 12 vertical holes and into the body to complete the installation of the side skirt.
- Repeat this process to install the side skirt on the other side.
- Step 7** • To help keep your ABS component looking like new, we highly recommend investing in a high-quality trim protectant. A quality trim protectant will help protect the deep glossy finish and prevent scratches and fading, keeping your ABS component looking sharp for years to come.

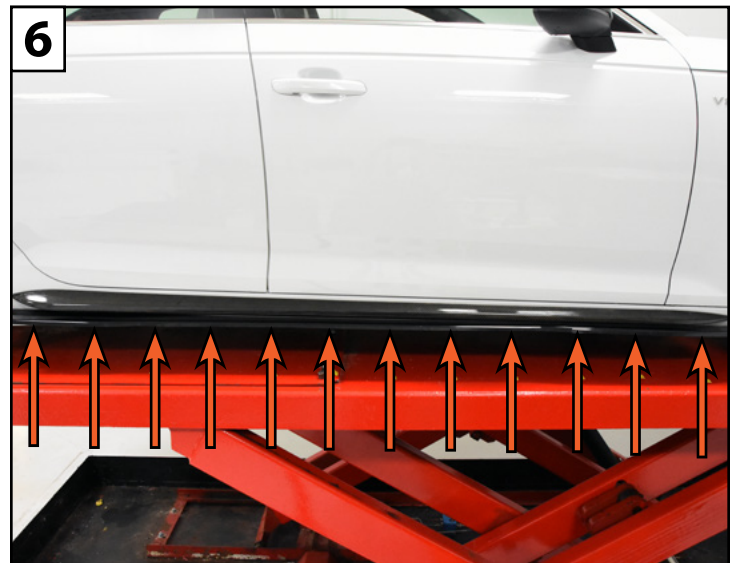

Section 2: Universal ABS Care Information

- Step 1**
- Over time road debris, car washes, and contaminants can cause tiny scratches and swirls to form, detracting from the glossy finish on your new ABS component.
 - If this happens, we highly recommend using an abrasive cutting or polishing compound to smooth out any scratches and restore the glossy finish.
 - Before removing scratches be sure to thoroughly wash and dry the ABS component to remove any contamination.
- Step 2**
- Using the cutting compound of your choice and a clean microfiber cloth, polish away the scratches, then buff off any leftover product leaving behind a consistent and smooth glossy finish.
 - Once any scratches are removed and you are happy with your finish, we highly recommend re-applying a high-quality plastic trim protectant to protect all your hard work.

