

# PIAA PLATINUM LED INSTRUCTIONS

\* These bulbs are not recommended for on-road use. They do not comply with FMVSS108 (USA) or CMVSS108 (Canada) for on-road use. For off-road use only.



## WARNING!!


\*Measure clearance from bulb collar back. Making sure there is no obstructions and is clear from any moving parts that could come in contact with the base.

LED bulbs are larger than stock bulbs. Please check the clearance behind the factory housing to make sure these bulbs will fit without any obstruction. If your vehicle has a dust cap over the factory bulbs, measure the depth to make sure the LED bulbs will fit.



1. Insert supplied allen wrench into the allen head bolt and loosen counter clock wise.
2. Rotate the LED positioning until you are satisfied with the beam pattern.
3. When LED chips are in the desired position, tighten the allen bolt back down.
4. Secure the bulb into it's location making sure to secure all springs and or clips.

### Base Adjustment Instructions

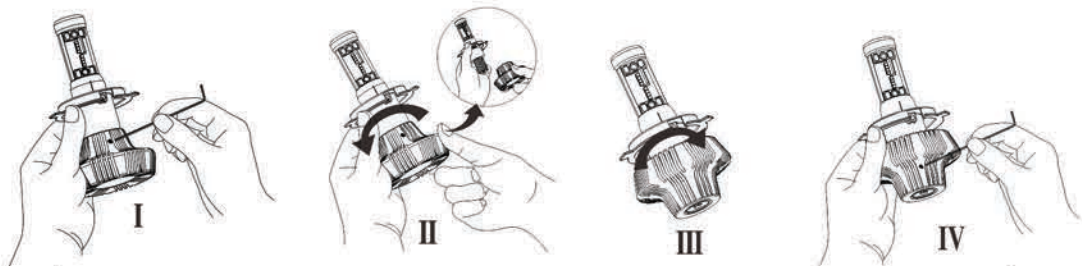

### \*\* Reverse the bulb based to get more clearance when needed

1. Insert supplied allen wrench into the allen head bolt in the heat sink and loosen counter clock wise.
2. Remove the heat sink base by rotating counter clockwise.
3. Flip the heat sink upside down and re-install onto the bulb.
4. Use supplied allen wrench to properly secure the heat sink back on the bulb.


Front

Size:195X145mm


H4 | H7




1. Adjust the collar position for the correct light angle, and remove the lower heat sink.




2. Place the LED bulb into the housing, making sure the bulb is in the correct position and locked into place.



3. Lock the bulb and screw the heatsink base back to the LED bulb body.




4. Connect the wire to the driver unit and into the original wiring adapter.




5. Secure the driver on a secure surface with a 3M adhesive or zip ties.


H8 | H9 | H11 | H16JP | H13 | 9005 | 9006 | 9007 | 9012 | PSX24 (5202)




1. Adjust the collar position for the correct light angle.




2. Insert the LED bulb back into the mounting base, making sure the bulb is in the correct position.



3. Lock to bulb into the desired housing with the proper securing method of your mounting collar.



4. Connect the wire to the driver unit and the original wiring adapter.



5. Secure the driver on a secure surface with a 3M adhesive or zip ties.

## 2 YEAR WARRANTY

This Limited Warranty specifically excludes defects resulting from misuse, abuse, neglect, alteration, modification, improper installation, unauthorized repairs, submersion, theft, crash, or by any other type of impact. Except for the Limited Warranty stated above, there are no warranties of PIAA products or any part thereof, whether express or implied. Any implied warranty of merchantability or any warranty of fitness for a particular purpose is expressly disclaimed. Some states do not permit the disclaimer of implied warranties. \*\*\* Keep payment receipt as it will be needed in the event a warranty claim is submitted\*\*\*\*

## EXCLUSION OF DAMAGES

In no event shall PIAA be liable for any damages whatsoever (including, without limitation, consequential damages, incidental damages, or damages for loss of use, loss of business profits, business interruption, loss of business information, loss of time, inconvenience, or other losses) arising out of the use, misuse, or inability to use a PIAA product. PIAA reserves the right to change the design its products without any obligation to modify any previous product. This warranty gives you specific legal rights. You may also have other rights that vary from state to state.

## REPAIR AND REPLACEMENT

If a PIAA product is suspected of being defective, it must be submitted freight prepaid, to either an authorized dealer or distributor for warranty inspection. The receipt or other proof of purchase and a description of the problem must be included. The returned product will be inspected. If the product is found to be defective and covered by this Limited Warranty, the sole remedy is repair or replacement, at PIAA's option. A repaired or replacement product will be shipped back at no charge, and will be warranted to be free from defects in workmanship and materials under normal use for as long as the original purchaser owns it. Removal, installation, or re-installation costs are not covered by this Limited Warranty.

www.piaa.com | 800.525.7422

Back