


Key Turbo Features

- · Gamma-Ti turbine wheel
- Dual ceramic ball bearing assembly with metal cage
- · Large internal wastegate
- Standard T3 mounting flange

Not Included with Turbo Assemblies:

- Speed sensor
- Turbine outlet V-Band
- Turbine inlet gasket
- · Oil drain gasket or drain port fitting

COMPRESSOR MAP

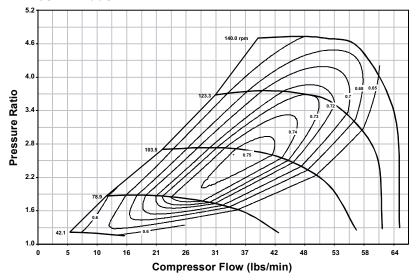

TURBINE HOUSING OPTIONS

Turbine Housing Part Number	A/R	Inlet Flange Shape	Housing Config.
12701008014	0.83	Т3	Single Scroll WG
12701008016	0.92	T4	Twin Scroll WG
12701019047	1.05	T4	Twin Scroll Non-WG

TURBO FRAME DIMENSIONS 50.8mm (2.00)Oil inlet fitting - 4AN Male 88.9mm (3.50) 92mm (3.62)117.8mm 168.2mm (6.62)(4.63)Oil Drain 3/8 NPT Oil Drain capscrew holes M8X1.25 (38mm bolt spacing) 44.5mm (1.75)

SUPER CORE CONFIGURATION

The following parts are not included as part of the super-core assembly: turbine housing, assembly clamp plate hardware, wastegate parts.

Turbo Part #	Turbo Frame Size	Super Core Part#	Comp. Wheel Outer Dia. (mm)	Comp. Wheel Inducer Dia.	Turbine Wheel Outer Dia.	Turbo A/R	Inlet Flange Config.
179351	B2	179350	76	57	70	.83	Т3



86mm

(3.38)