





VW/Audi 1.8T/2.0T Gen3 Intercooler Delete Brackets Kit Installation Instructions - [ES3988199](#)

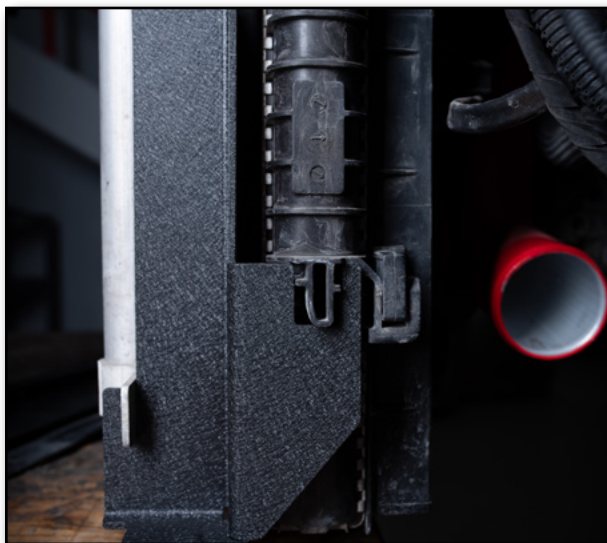

Skill Level
2 - Moderate
Some Experience
Recommended

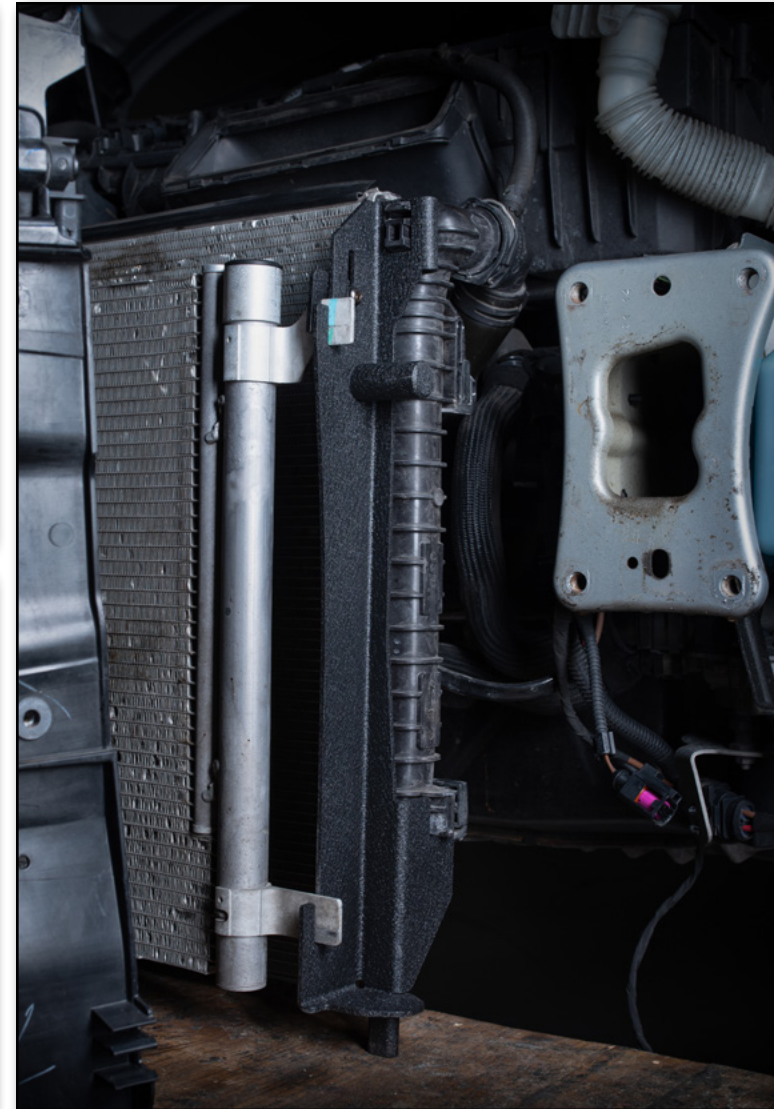


Proper service and repair procedures are vital to the safe, reliable operation of all motor vehicles as well as the personal safety of those performing the repairs. Standard safety procedures and precautions (including use of safety goggles and proper tools and equipment) should be followed at all times to eliminate the possibility of personal injury or improper service which could damage the vehicle or compromise its safety.

TABLE OF CONTENTS

| | |
|---|-----------------------|
| Required Tools and Equipment..... | pg.3 |
| Installation and Safety Information..... | pg.4 |
| Project Overview | pg.5 |
| Removing the Stock Intercooler | pg.6 |
| Installing the Intercooler Delete Brackets..... | pg.29 |

KIT CONTENTS

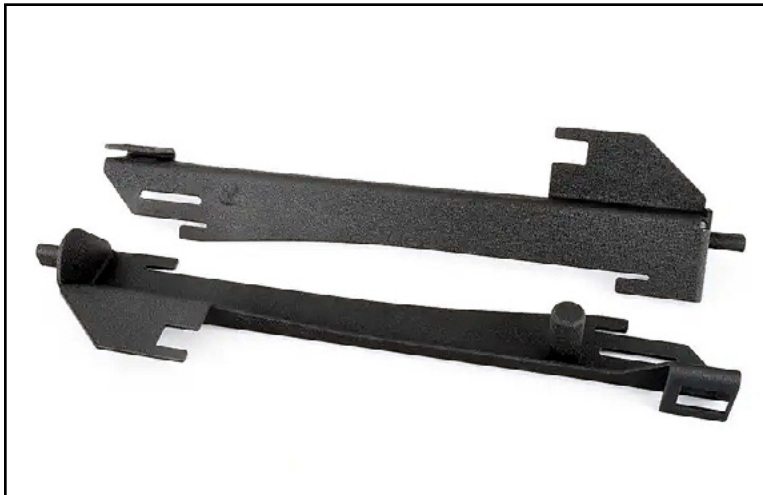

Intercooler Delete Brackets



A/C Condenser Mounting Brackets

REQUIRED TOOLS

Note: The tools required for each step will be listed by the step number throughout these instructions.

Standard Automotive Tools

- **Protecta-Sockets (for lug nuts)** [ES#2221243](#)
- **3/8" Drive Ratchet** [ES#2765902](#)
- **3/8" Drive Torque Wrench** [ES#2221245](#)
- **3/8" Drive Deep and Shallow Sockets** [ES#2763772](#)
- **3/8" Drive Extensions** [ES#2804822](#)
- **Hydraulic Floor Jack** [ES#240941](#)
- **Torx Drivers and Sockets** [ES#11417/8](#)
- **1/2" Drive Deep and Shallow Sockets** [ES#2839106](#)
- **1/2" Drive Ratchet**
- **1/2" Drive Extensions**
- **1/2" Drive Torque Wrench** [ES#2221244](#)
- **1/2" Drive Breaker Bar** [ES#2776653](#)
- Bench Mounted Vise
- Crows Foot Wrenches
- **Hook and Pick Tool Set** [ES#2778980](#)

Required For This Install

- **1/4" Drive Ratchet** [ES#2823235](#)
- **1/4" Drive Deep and Shallow Sockets** [ES#2823235](#)
- **1/4" Drive Extensions** [ES#2823235](#)
- **Plier and Cutter Set** [ES#2804496](#)
- **Flat and Phillips Screwdrivers** [ES#2225921](#)
- **Jack Stands** [ES#2763355](#)
- Ball Pein Hammers
- Pry Bar Set [ES#1899378](#)
- Electric/Cordless Drill
- Wire Strippers/Crimpers
- Drill Bits
- Punch and Chisel Set
- **Hex Bit (Allen) Wrenches and Sockets** [ES#11420](#)
- Thread Repair Tools [ES#1306824](#)
- Open/Boxed End Wrench Set [ES#2765907](#)

Available On Our Website

Specialty Tools

- **Trim Removal Tool Set** [ES#517779](#)
- **Triple Square Socket Set** [ES#1910125](#)
- **VAG Connector Removal Tool** [ES#2628676](#)
- **Paint Marker**

INSTALLATION NOTES

- **RH** refers to the *passenger side* of the vehicle.
- **LH** refers to the *driver side* of the vehicle.
- Always use the proper torque specifications.
- If applicable to this installation, torque specifications will be listed throughout the document and at the end as well.
- Please read all of these instructions and familiarize yourself with the complete process **BEFORE** you begin.

GENERAL PREPARATION AND SAFETY INFORMATION

ECS Tuning cares about your health and safety, please read the following safety information. This information pertains to automotive service in general, and while it may not pertain to every job you do, please remember and share these important safety tips.

- Park your car in a safe, well lit, level area.
- Shut the engine off and remove the key from the ignition switch.
- Make sure any remote start devices are properly disabled.
- **ALWAYS** wear safety glasses.
- Make sure the parking brake is applied until the vehicle is safely lifted and supported.
- Whether lifting a vehicle using an automotive lift or a hydraulic jack, be sure and utilize the factory specified lift points.
- Lifting a vehicle in an incorrect location can cause damage to the suspension/running gear.
- **ALWAYS** support the vehicle with jack stands.
- **ALWAYS** read and follow all safety information and warnings for the equipment you are using.



NEVER get underneath a vehicle that is supported only by a jack, and **ALWAYS** make sure that the vehicle is securely supported on jack stands.

PROJECT OVERVIEW

Let's take a moment and look at what we will be doing today.




First we'll remove the bumper cover, headlights, and a few other components under the hood (**Photo #1**).

Next, we'll mark the crash beam and lock carrier bolts for easy realignment, then we'll remove the crash beam (**Photo #2**).

Then we'll disassemble the lock carrier and remove the stock intercooler (**Photo #3**).

Finally, we'll install the intercooler delete brackets, and we'll reassemble everything in the reverse order of removal (**Photo #4**).


Now let's get to it!

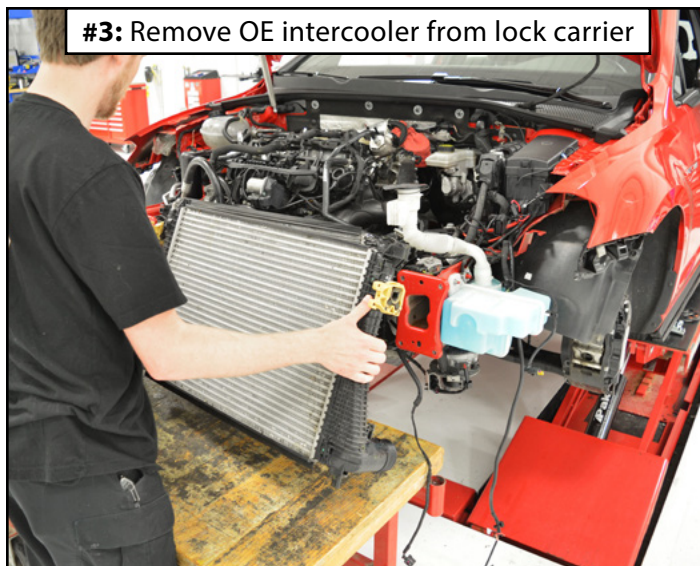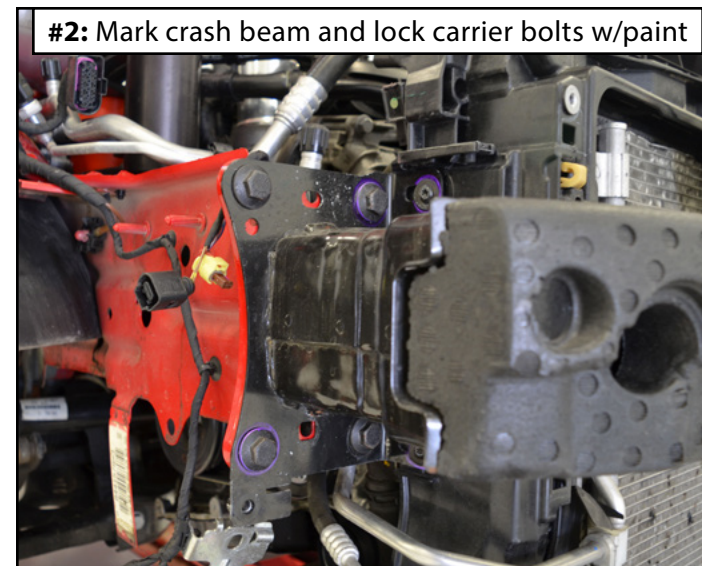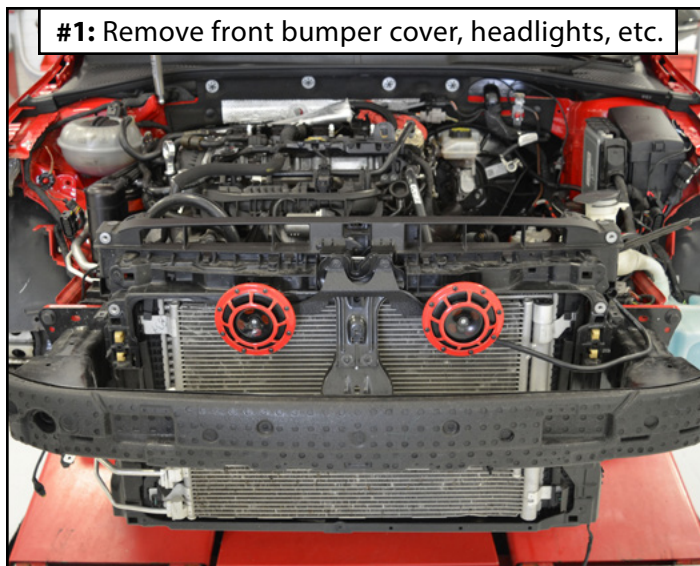

REMOVING THE STOCK INTERCOOLER

Step 1: 10mm Socket & Ratchet, T25 Torx

To begin this install we need to disconnect the negative battery terminal and remove the air inlet duct. We opted to remove the battery entirely, as well as the intake system and the engine cover for better visibility in our photos. These additional parts don't need to be removed for this job, but it only takes a few minutes and it is **WELL** worth it to gain a little extra space to work with.

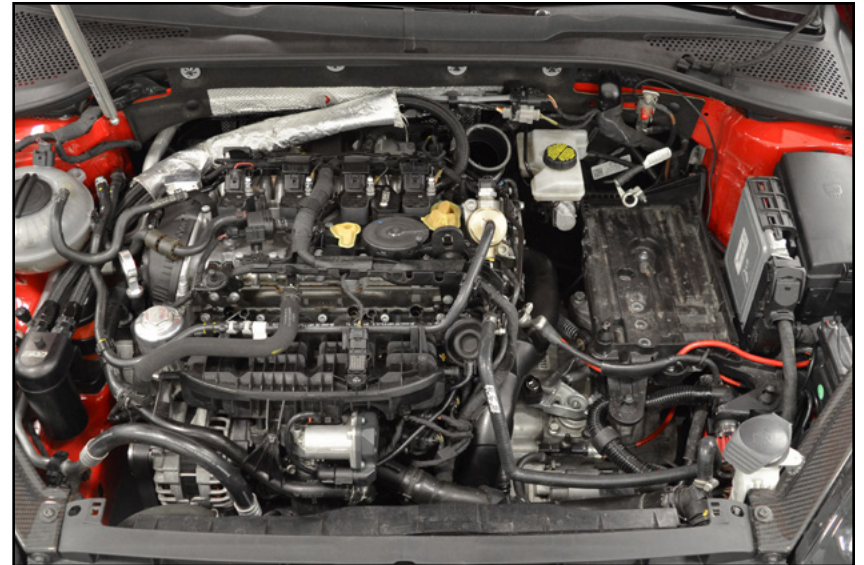

Step 2: T25 Torx

Remove the two screws which secure the front grille to the core support.



REMOVING THE STOCK INTERCOOLER

Step 3:

MK7 only:

First lift the grille upward to release the clips along the bottom from the bumper cover, then gently pull it forward and out of the core support (**Photo #1**).



#1: (MK7 only)


MK7.5 only:

First pull the top of the grille forward to release the clips along the top, then pull the bottom of the grille forward to release the clips along the bumper cover (**Photo #2**). Don't forget to disconnect the wiring harness behind the VW emblem (not shown).




#2: (MK7.5 only)

Don't forget to disconnect the sensor harness behind the VW emblem

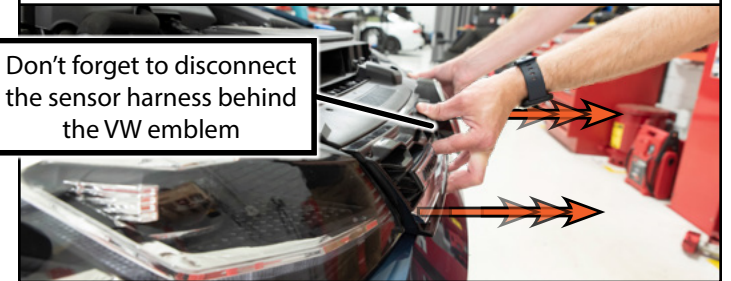


MK7 & MK7.5:

Safely lift and support the vehicle, then remove the belly pan (highlighted in **GREEN** in **Photo #3**).

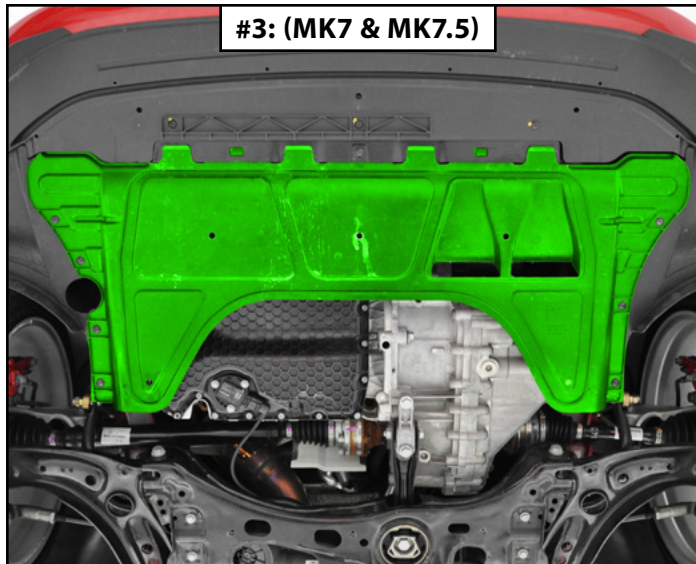

#3: (MK7 & MK7.5)

Disconnect the intercooler hoses (highlighted in **GREEN** in **Photo #4**) from the intercooler.

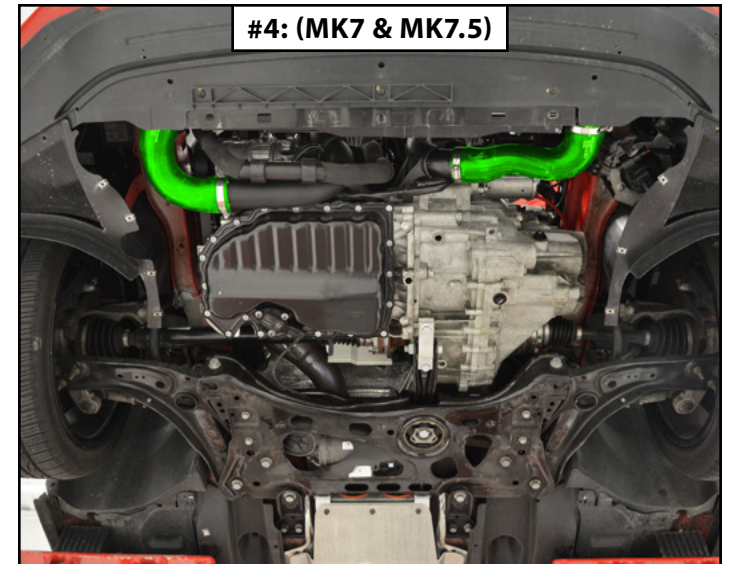


#4: (MK7 & MK7.5)

REMOVING THE STOCK INTERCOOLER


Step 4: 17mm Protecta-Socket & Breaker Bar, T25 Torx

Remove both front wheels and the lower fender liners.

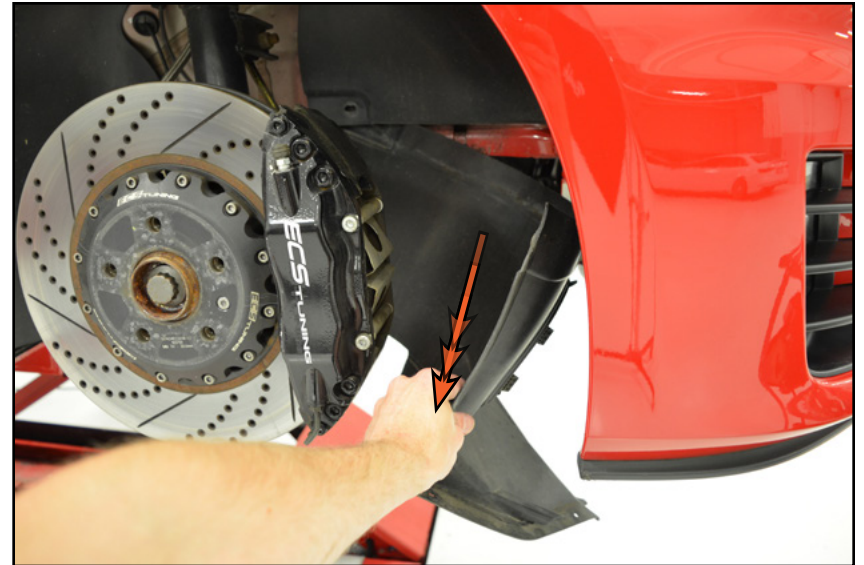

Step 5: T25 Torx

Pull the upper fender liner back slightly, then locate and remove the screws which secure the bumper cover to each fender (arrow in the inset photo).

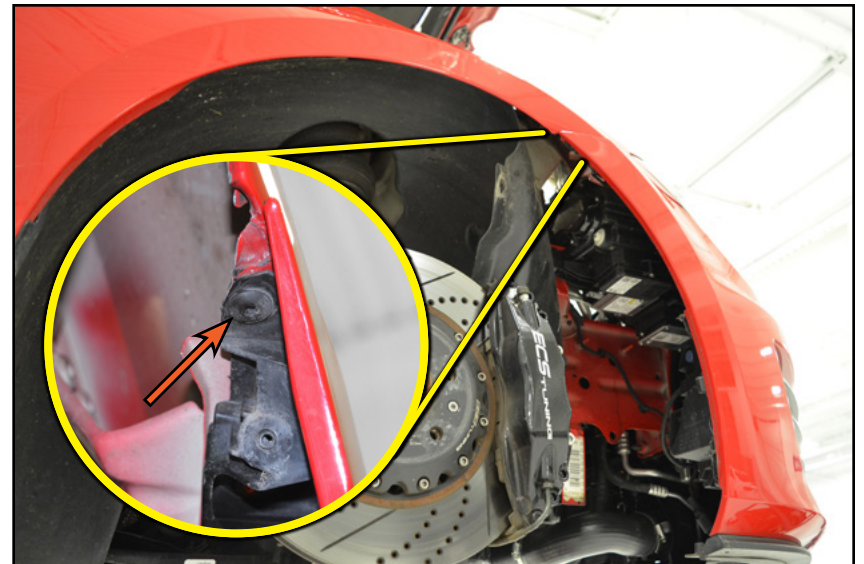

REMOVING THE STOCK INTERCOOLER


Step 6:

Disconnect both fog light electrical connectors (if equipped).




Step 7: T25 Torx

Remove the two screws which secure the top of the bumper cover to the support panel.



This would be a good time to lay out a sheet or a blanket on the floor so you have a safe place to put the bumper cover once it has been removed.

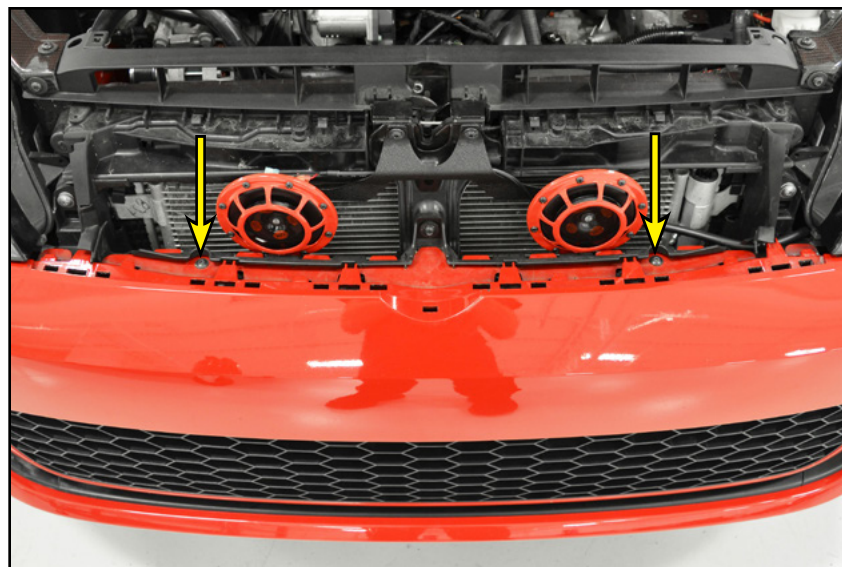

REMOVING THE STOCK INTERCOOLER


Step 8:

Now is a good time to enlist the help of a friend. Pull outward on each side of the bumper cover as shown in the photo to release it from each fender.



Step 9:

At this point the only thing which is still holding the bumper cover on the front end is the line of clips which are located just below where the grille was mounted. Gently lift up on these clips to release them while also pulling the bumper cover toward the front of the vehicle.

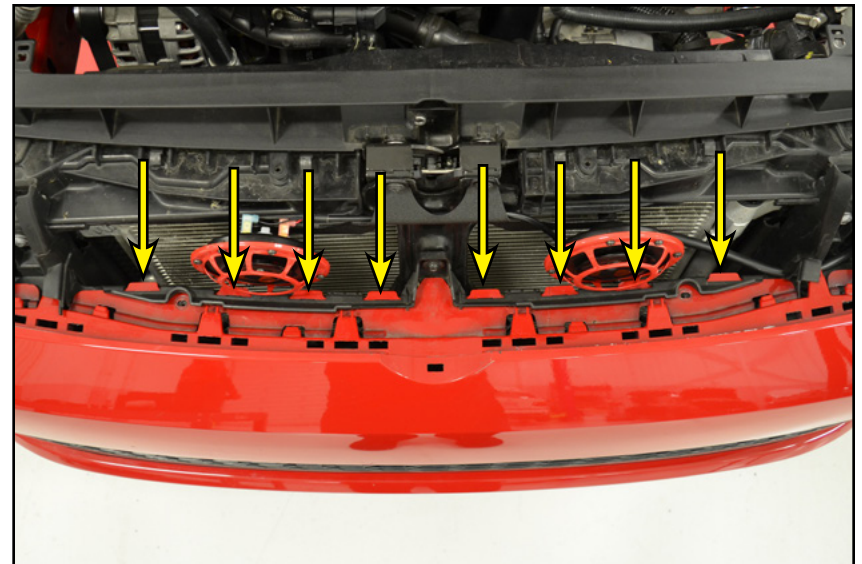

REMOVING THE STOCK INTERCOOLER

Step 10:

Pull the bumper cover off of the vehicle a few inches to ensure that there are no electrical connections or hoses still attached, then remove the bumper cover and set it aside.



Step 11:

Disconnect the ambient air temperature sensor, then release the wiring harness from the clips on the LH side of the lock carrier.




REMOVING THE STOCK INTERCOOLER

Step 12: Flat Head Screwdriver

Locate the two plastic air dams which clip into the front of the lock carrier. The clips and on the air dams have been highlighted in **GREEN** in the photo on the right, and the holes in the lock carrier have been highlighted in **RED**.

Working on the RH side of the vehicle, press inward on each tab, pull the air dam out of the radiator support slightly, then pull it straight down to guide it out from behind the crash beam. Repeat this process on the LH side of the vehicle to remove the other air dam.

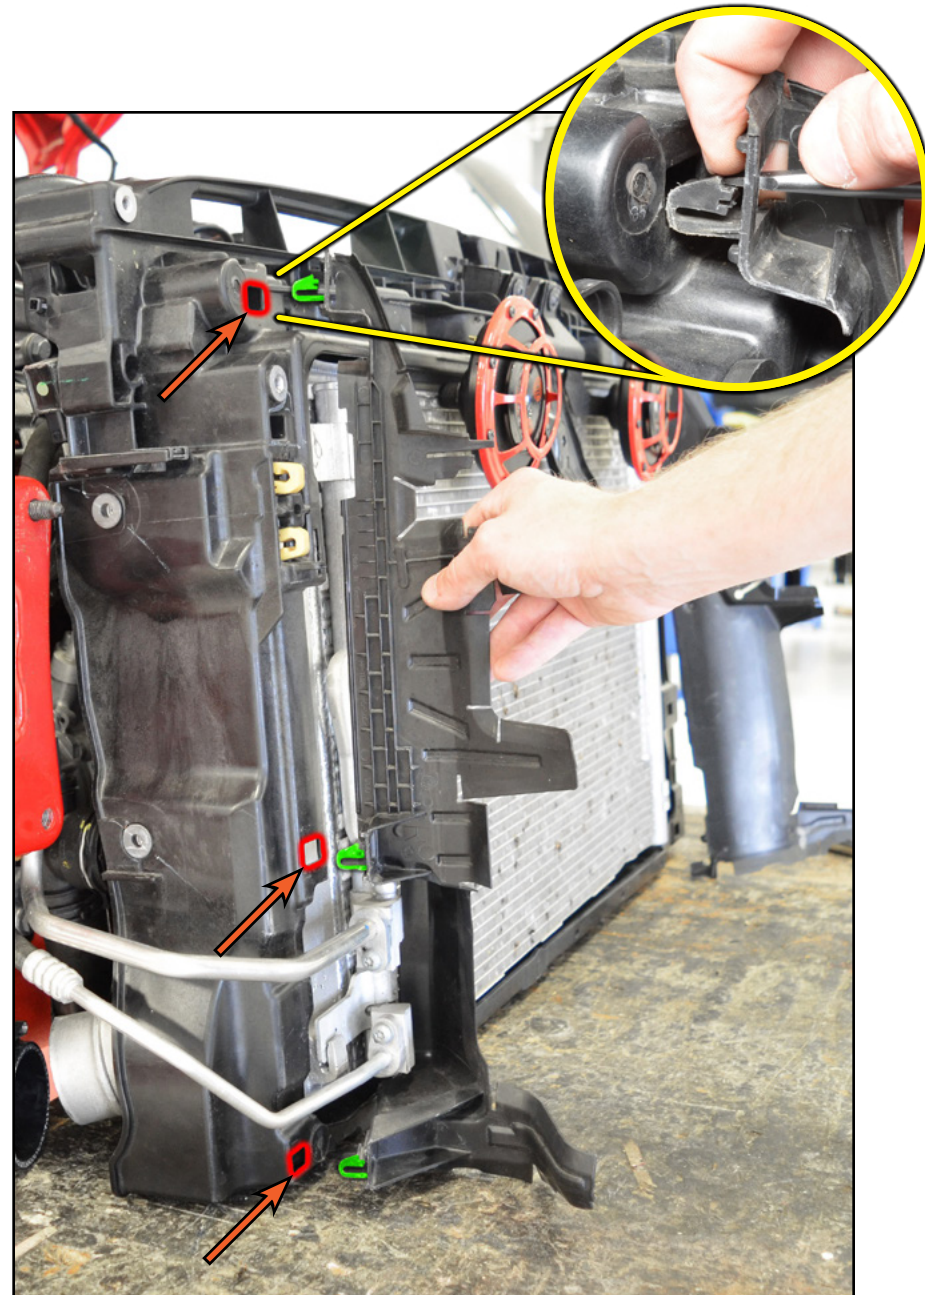


REMOVING THE STOCK INTERCOOLER

Step 13:

Remove the three T30 bolts (**ORANGE** arrows) which secure the grille support panel (highlighted in **GREEN**) into place.


Next, locate and release the two clips which secure the grille support panel to the lock carrier (highlighted in **RED** in the inset photo). With the bolts removed and the clips released you will be able to remove the panel from the vehicle.

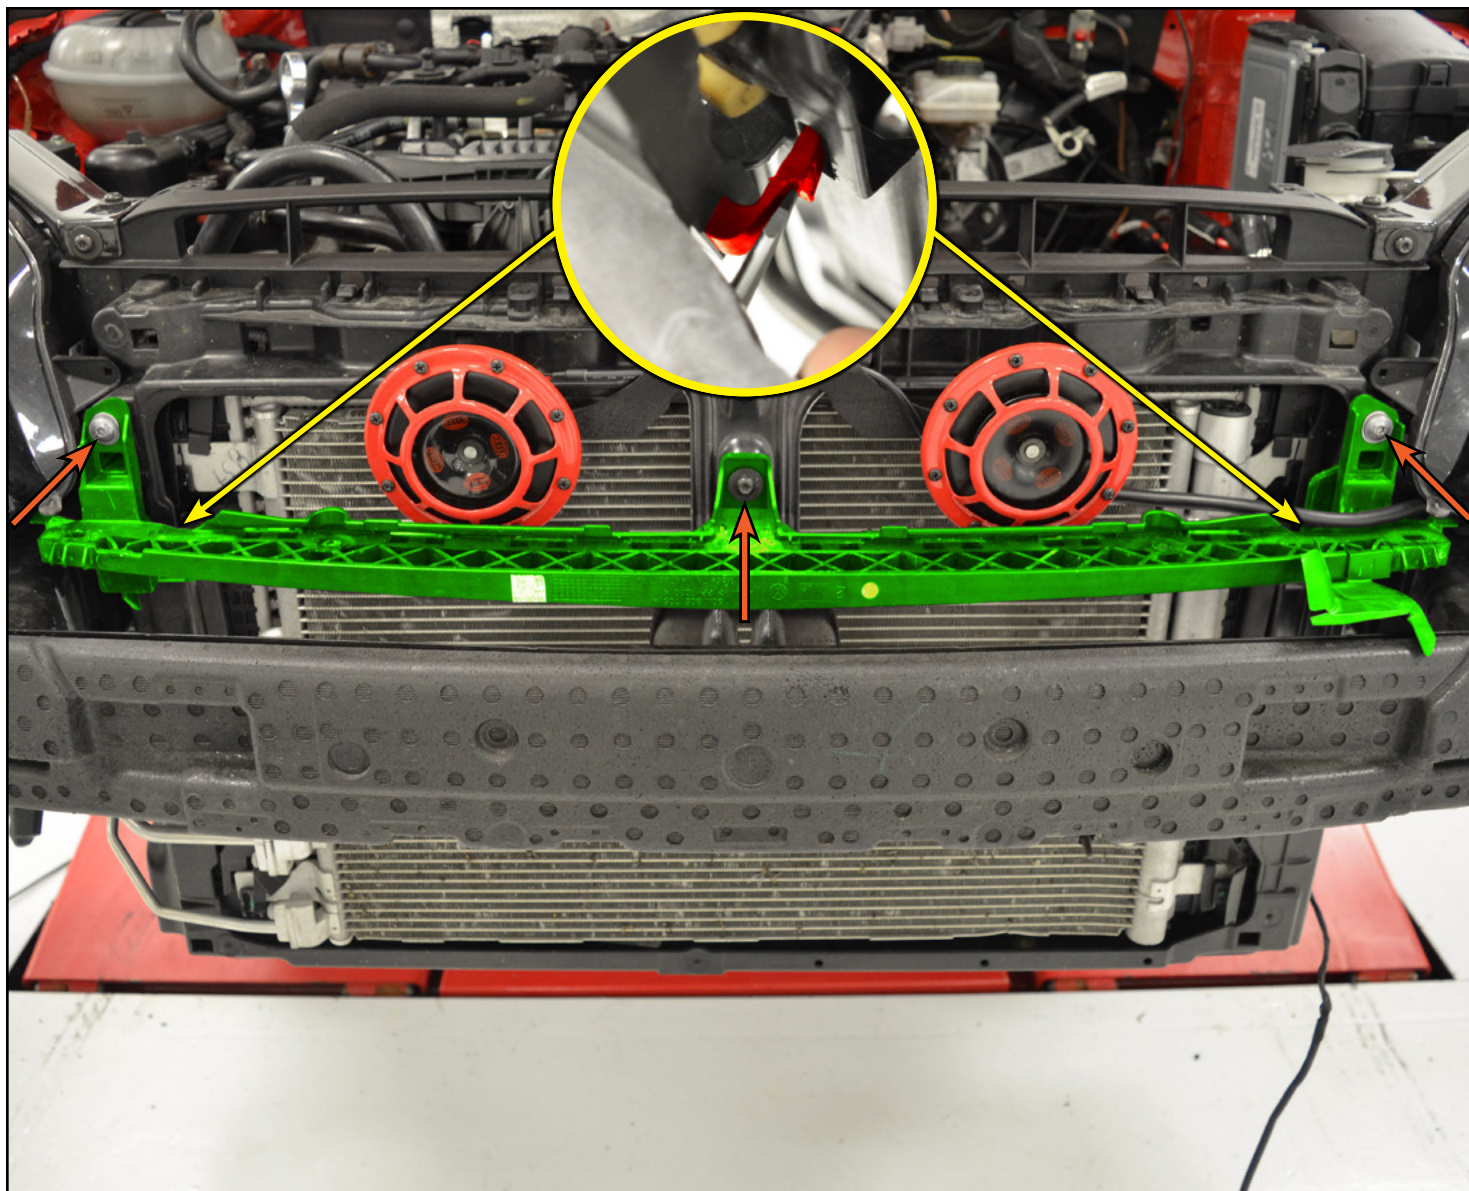

REMOVING THE STOCK INTERCOOLER


Step 14: 10mm Socket & Ratchet

Remove the two nuts which secure the hood latch brace to the crash beam.

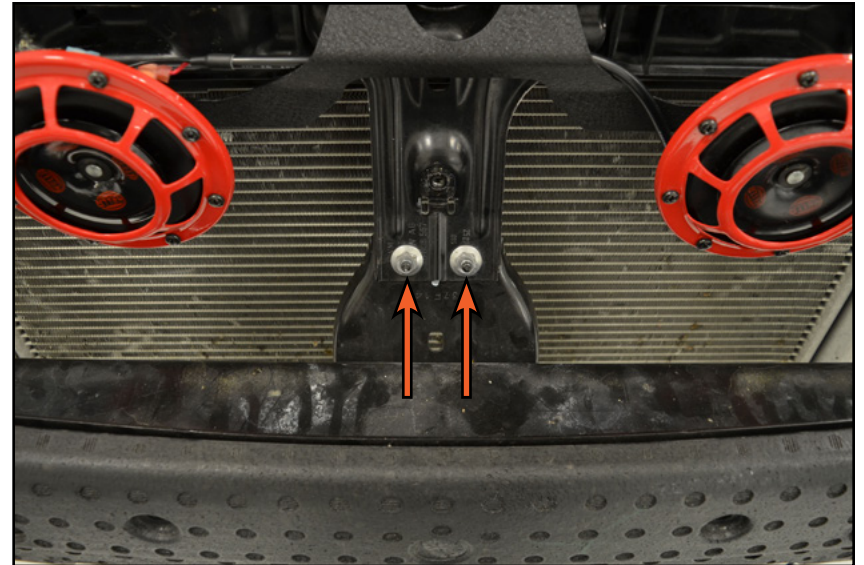

Step 15: M10 Triple Square Socket & Ratchet

Disconnect both horns and remove the brackets from the crash beam.

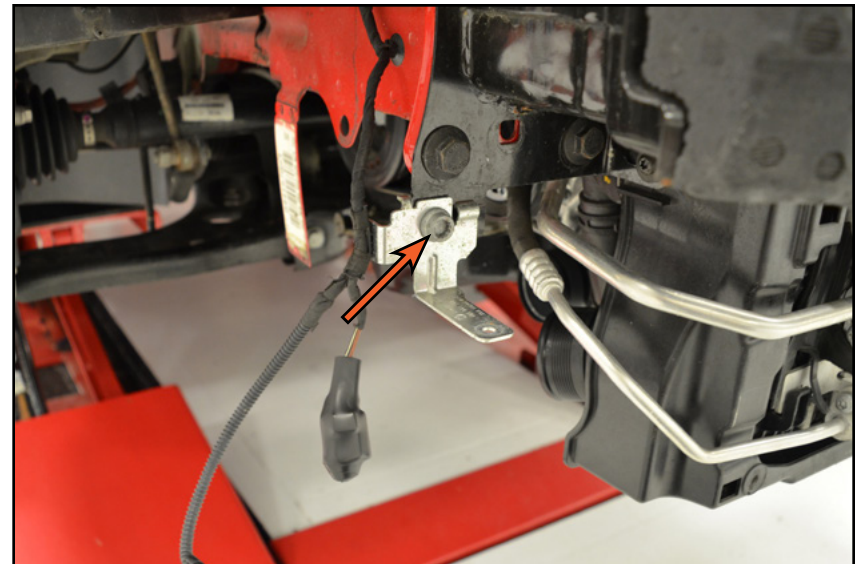

REMOVING THE STOCK INTERCOOLER

Step 16: T30 Torx

Remove the three bolts which secure the RH core support brace and remove it from the vehicle.



Step 17:

Push the windshield washer fluid spout clip inward, then lift upward to release it from the LH core support brace.



This does not apply to the MK7 Golf R & Audi S3. The washer reservoir and cap are independent of the core support brace on these vehicles.




REMOVING THE STOCK INTERCOOLER

Step 18:

The hood release cable carrier is mounted on the back side of the LH core support brace.

We need to release the cable from the carrier. First, pull the cable out of the carrier (**Photo #1**), then swing the carrier cover (highlighted in **GREEN** in **Photo #2**) out of the way and pull the ball-end of the cable out of the carrier (**Photo #3**).

#1: Pull on the cable to release it from the carrier

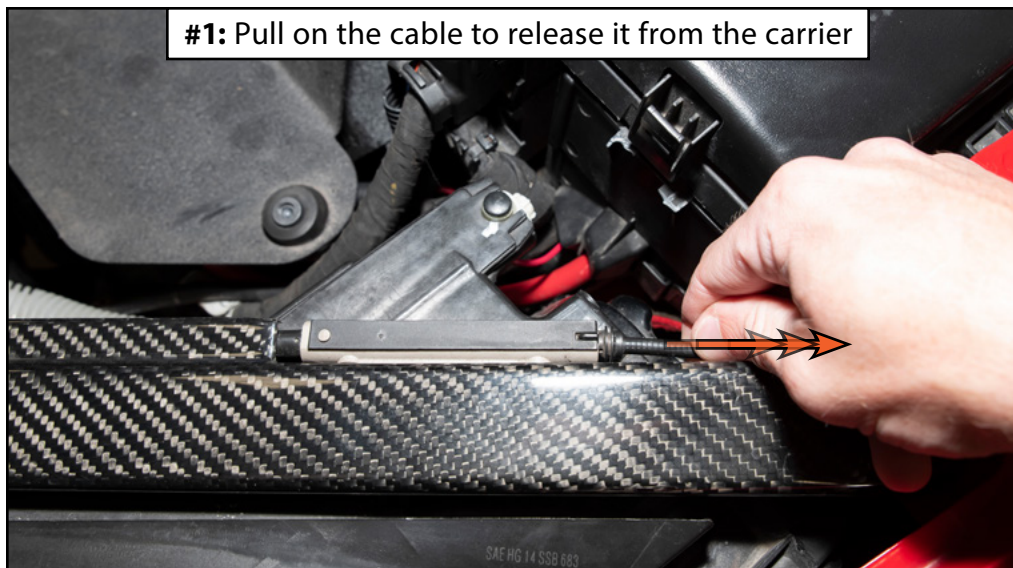

#2: Swing the carrier cover out of the way




#3: Release the ball-end of the cable



REMOVING THE STOCK INTERCOOLER


Step 19: T30 Torx

Remove the three bolts which secure the LH core support brace and remove it from the vehicle.

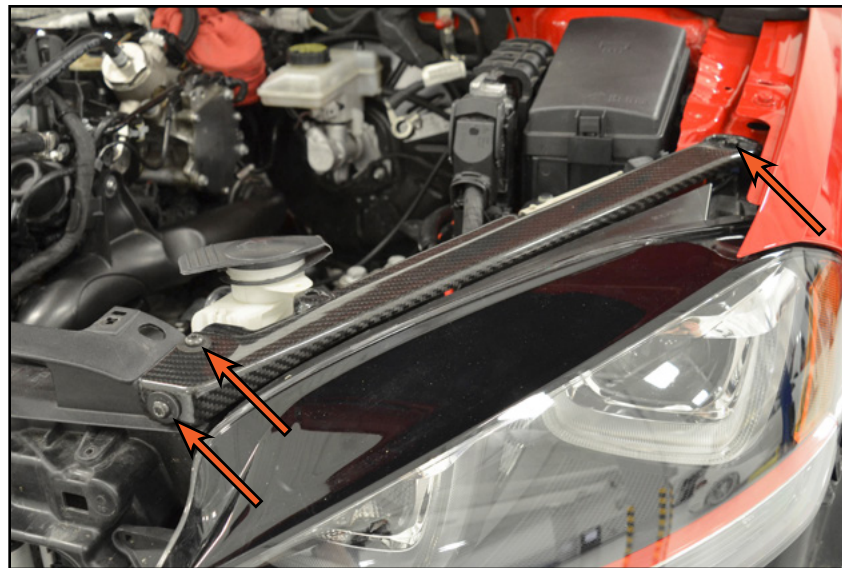

Step 20: Needle Nose Pliers

Gently squeeze inward on the cable carrier clips as shown in the photo on the right, then pull the carrier out of the core support brace. Set the core support brace aside and swing the cable carrier out of the way.

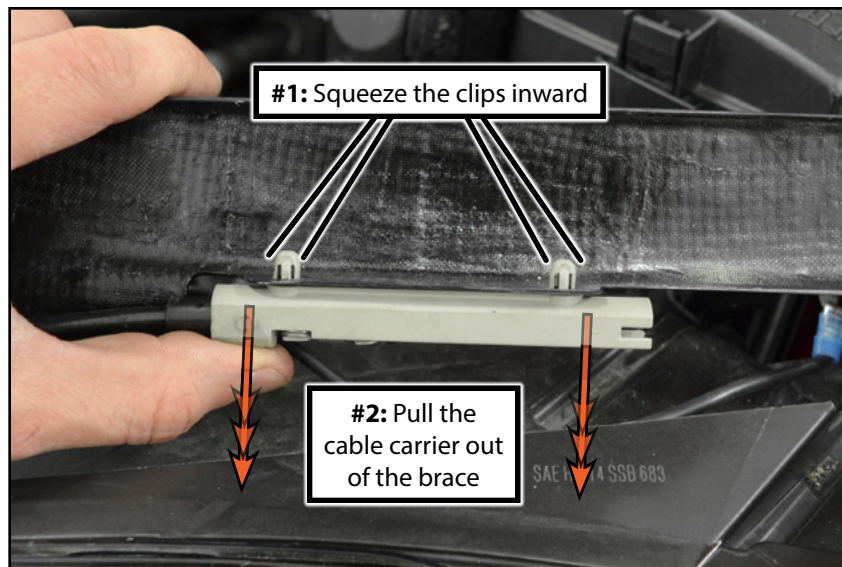

REMOVING THE STOCK INTERCOOLER

Step 21: 10mm Socket & Ratchet -or- T30 Torx

Remove the bolt from the front inside corner of the LH headlight.



Step 22: T30 Torx


Remove the bolt which secures the LH headlight to the fender.



REMOVING THE STOCK INTERCOOLER

Step 23:

Carefully slide the LH headlight outward 2-3 inches. The goal here is to gain better access to the back side of the headlight, we aren't removing it just yet.



Some vehicles may have an additional bolt securing the rear of the LH headlight to the vehicle. Please reference the photo in step 26 on the next page.



Step 24:


Locate and disconnect the LH headlight electrical connector (highlighted in **GREEN** in the photo), then remove the headlight and set it aside.



REMOVING THE STOCK INTERCOOLER

Step 25: T30 Torx

Repeat steps 21-24 to remove the RH headlight. Please note that the RH headlight will have an additional bolt which secures the rear of the headlight to the vehicle.

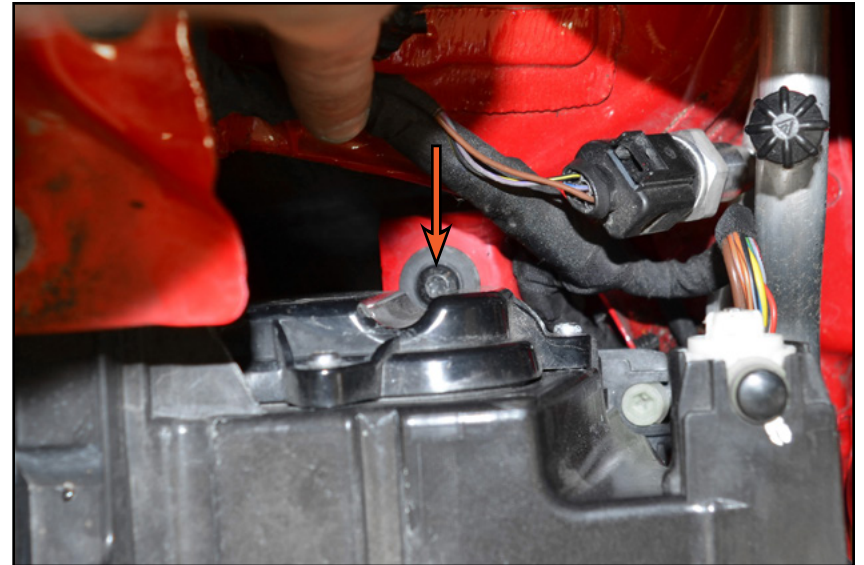


Step 26: VAG Connector Removal Tool



It is very important that the negative battery terminal has been removed **BEFORE** proceeding with this step.

Working on the RH side of the vehicle, disconnect the electrical connectors from the following:


- RH crash sensor (located on the RH side of the lock carrier)
- Hood latch switch (located on the RH side of the lock carrier)
- Coolant temp sensor (located on the lower radiator hose)

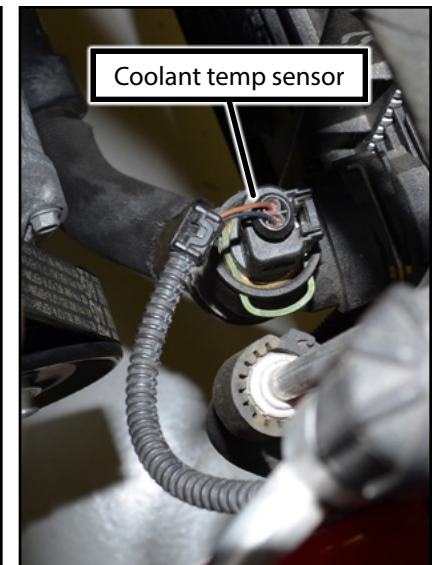

REMOVING THE STOCK INTERCOOLER

Step 27:

Working on the LH side of the vehicle, disconnect the electrical connector from the LH crash sensor (located on the LH of the lock carrier).

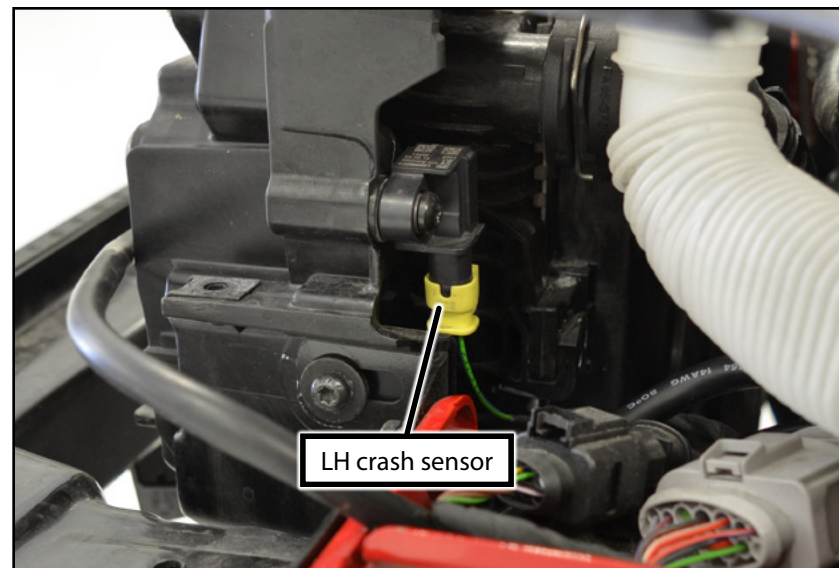


Step 28: Paint Marker, T30 Torx

Trace around the four bolts which secure the lock carrier to the crash beam, this will make aligning the front end body panels a **BREEZE!**

Once all four bolts have been traced out, **safely support the lock carrier from below**, then remove the bolts.




CAUTION: Failure to properly support the lock carrier from below could damage to radiator hoses or A/C lines.

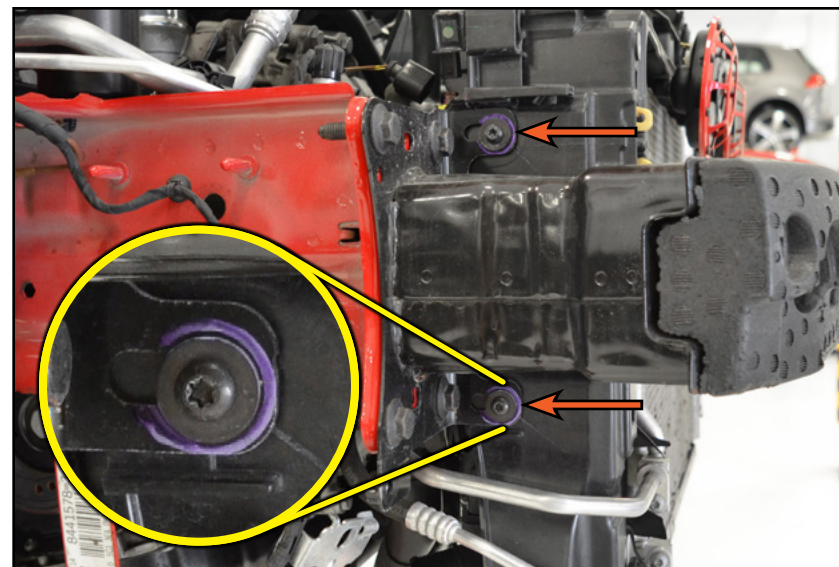

REMOVING THE STOCK INTERCOOLER


Step 29:

Trace around the eight bolts which secure the crash beam to the chassis, this will also make reinstallation a *breeze*.


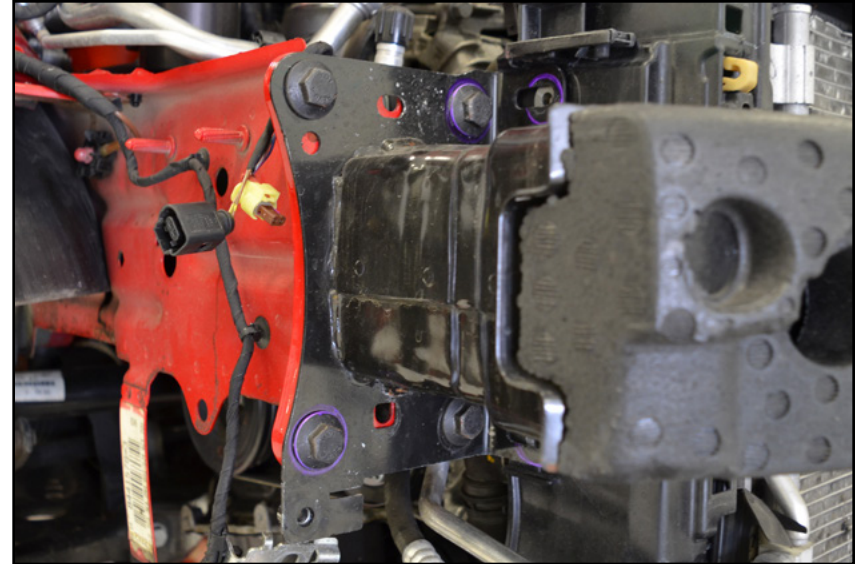


Step 30: 16mm Socket & Ratchet

Once all eight bolts have been traced out, remove the bolts and the crash beam.



If you are working alone, thread one of the crash beam bolts back through the chassis as shown in the inset photo. This will allow you to “hang” the crash beam on one side while you remove the bolts from the other side.

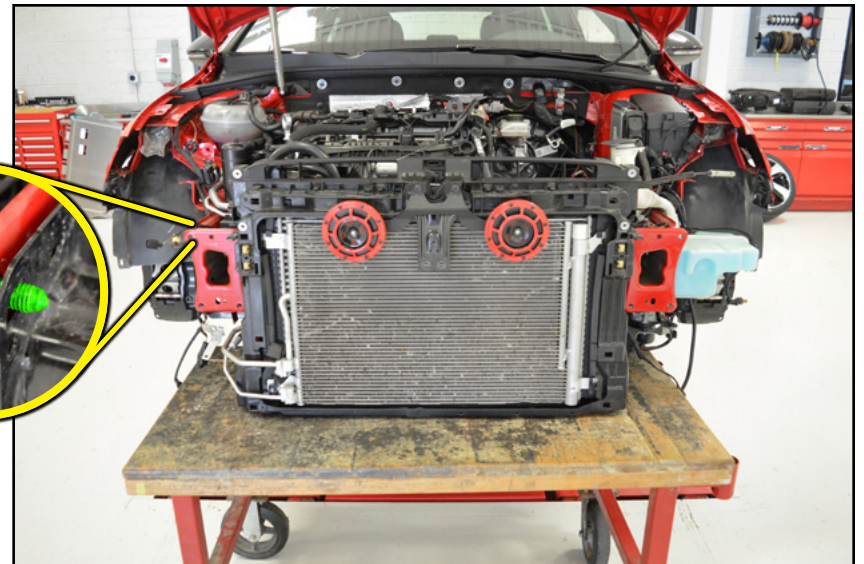


REMOVING THE STOCK INTERCOOLER

Step 31:

Our next task is to release the condenser from the front of the intercooler. Locate the two air channels which are clipped onto either side of the condenser (highlighted in **GREEN** in the photo).



The next few photos were taken with the lock carrier already released and swung off to the side. This was done for better visibility, you can actually release the condenser now as your vehicle currently sits.

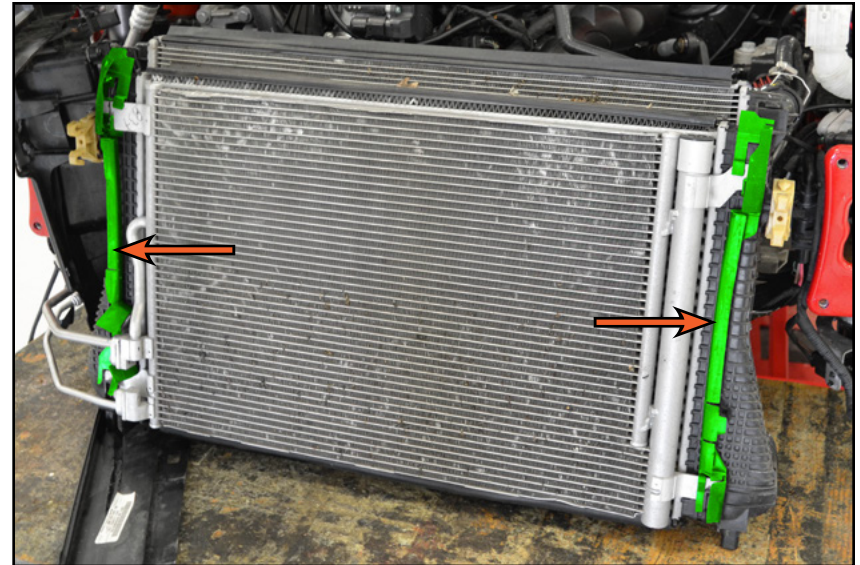

Step 32:

Pull upwards to release the air channels from the condenser and remove them from the vehicle.



REMOVING THE STOCK INTERCOOLER

Step 33:




DO NOT disconnect any of the A/C lines, there is enough flexibility to swing the condenser out of the way while remaining attached to the system.



The condenser is secured by two clips which are located near the top of each intercooler side tank (highlighted in **GREEN** in **Photo #1**). Push inward on these clips one at a time while lifting the condenser upward (**Photo #2**).

Once the condenser has been lifted out of the clips you can set it aside, but it is a good idea to support it from below to prevent putting any unwanted stress on the A/C lines.

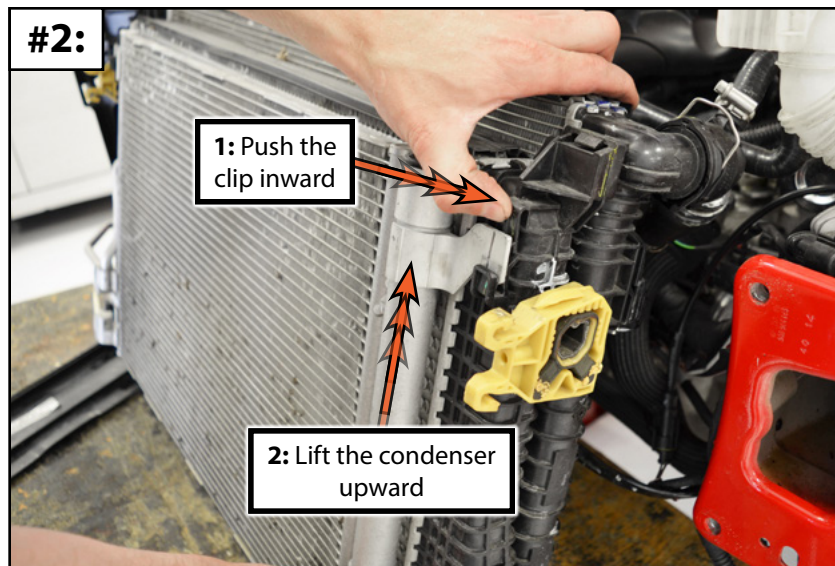



REMOVING THE STOCK INTERCOOLER

Step 34:

Now we need to release the upper intercooler brackets from the lock carrier.

The illustrations on the right show how the two "ears" lock into place against the lock carrier. The goal here is to **GENTLY** pry these ears inward (**Photo #1**) while pushing the brackets back through the slot (**Photo #2**). Over time these plastic brackets can become very brittle, so take your time and work slowly.



Use this procedure to release both upper intercooler brackets, then continue to the next page.

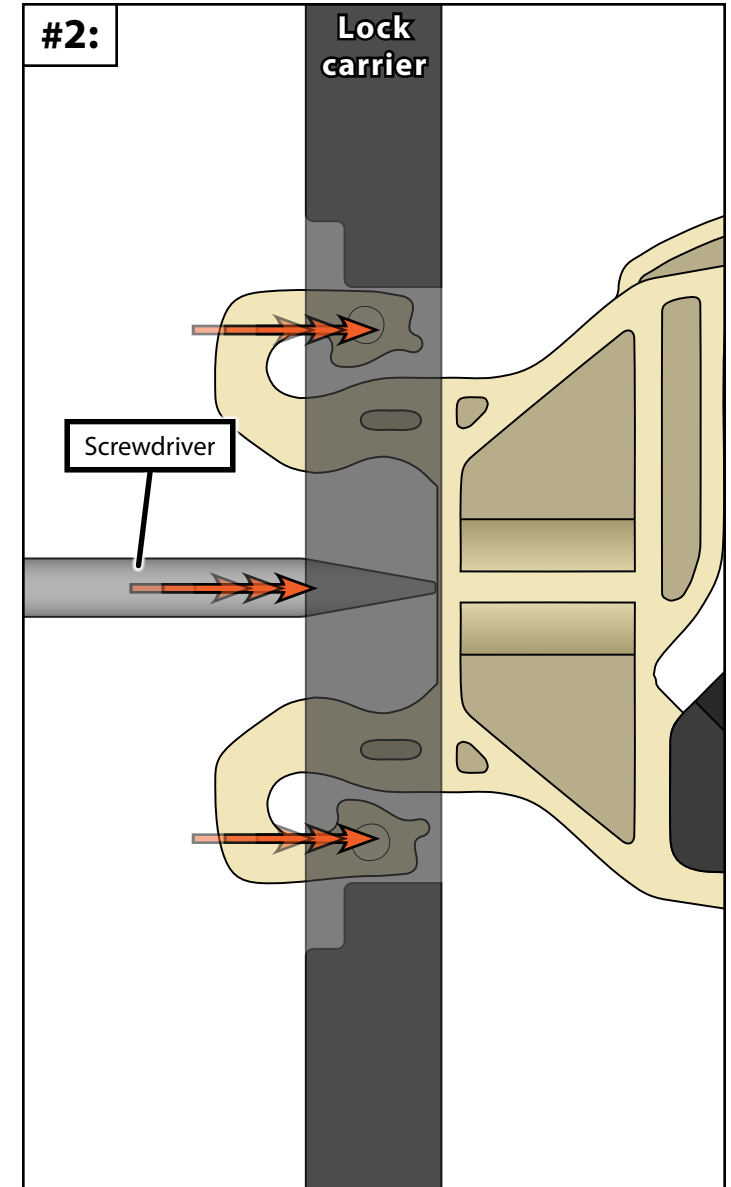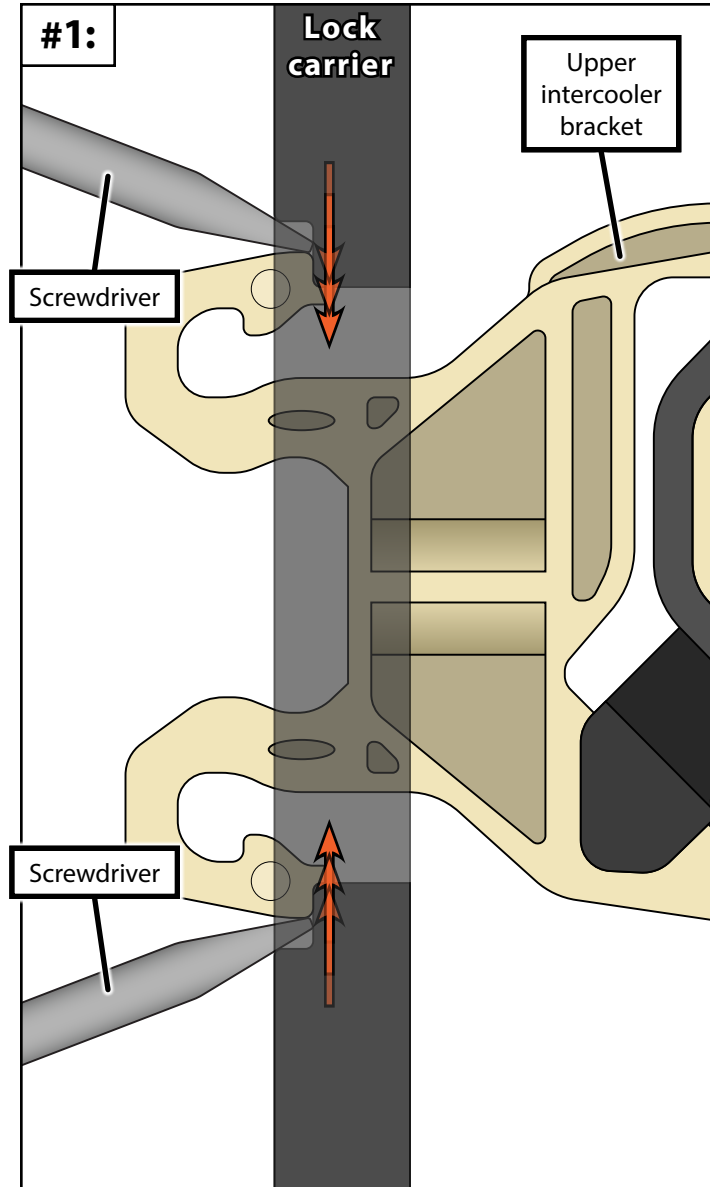

REMOVING THE STOCK INTERCOOLER

Step 35:

Pull the top of the radiator and intercooler assembly rearward until it clears the lock carrier (**Photo #1**), then lift the entire assembly out of the rubber grommets in the bottom of the lock carrier (**Photo #2**).

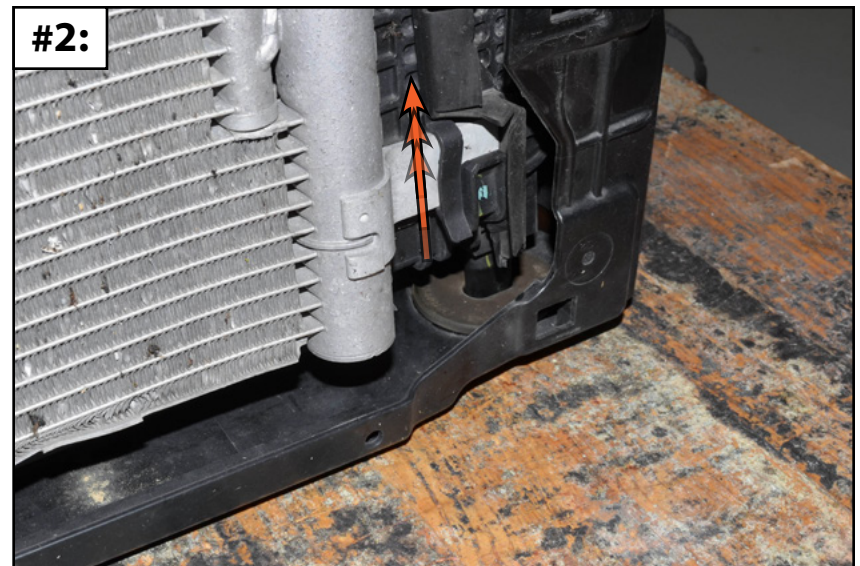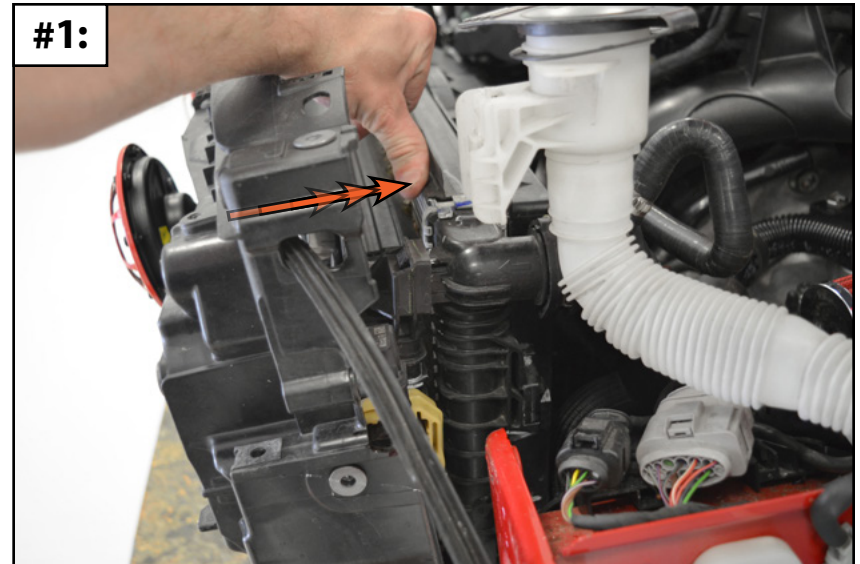




REMOVING THE STOCK INTERCOOLER

Step 36:

The radiator is secured to the intercooler by two clips which are located near the top of each side tank (highlighted in **GREEN** in **Photo #1**).

Push downward on these clips one at a time (**Photo #2**) while pushing the radiator away from the intercooler (**Photo #3**).

Once the top of the radiator has been released from the intercooler it can be lifted out of the lower mounts (**Photo #4**).

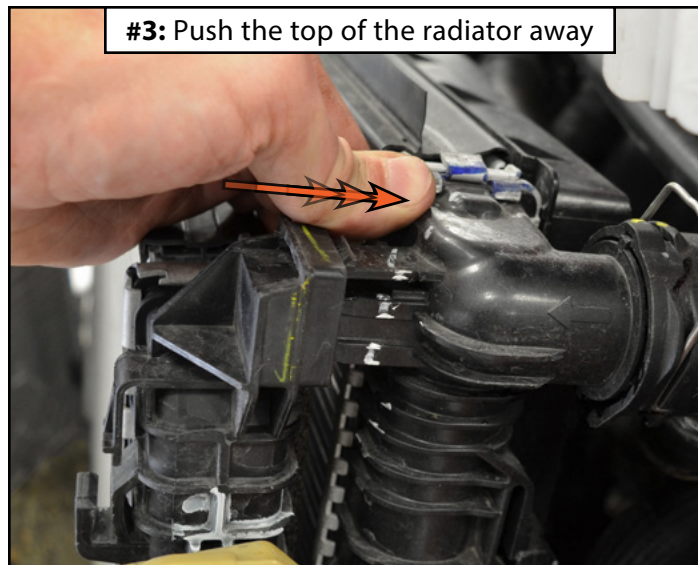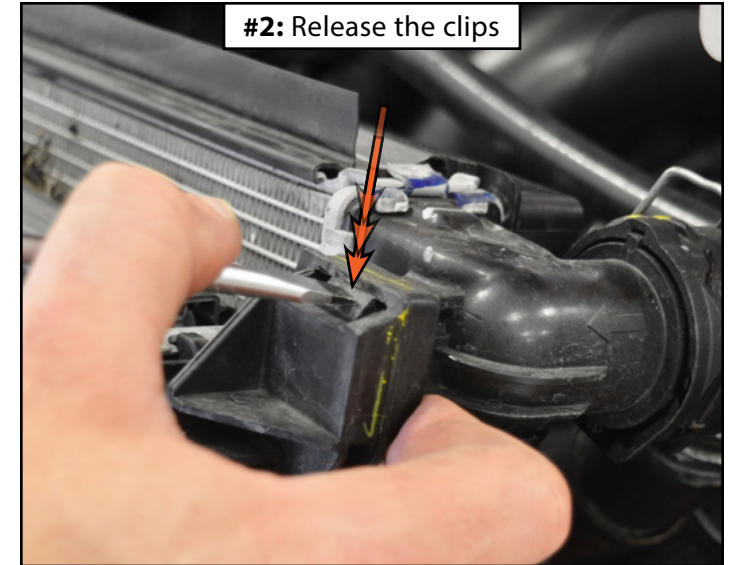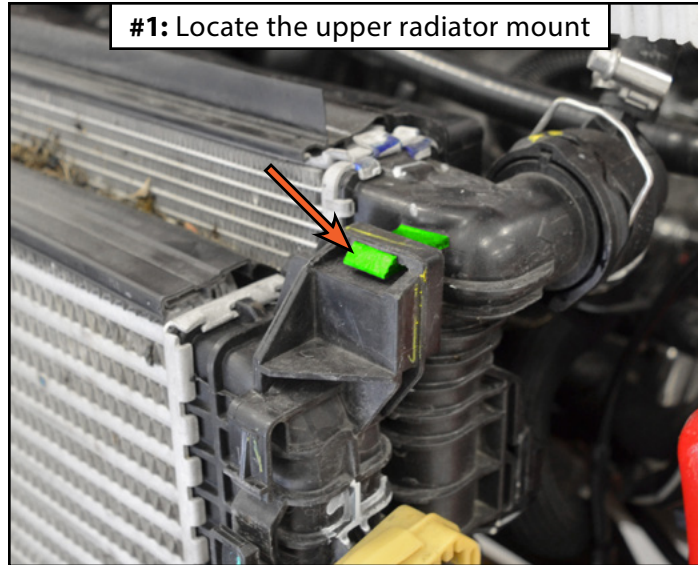

REMOVING THE STOCK INTERCOOLER

Step 37:

Lift the stock intercooler out of the engine compartment. Be sure to confirm that there are no hoses or wiring harnesses in your way as you are removing the intercooler.



INSTALLING THE INTERCOOLER DELETE BRACKETS


Step 1:

#1) Slide the radiator into the lower slots in the intercooler delete brackets (highlighted in **GREEN**).


#2) Rotate each delete bracket rearward until the plastic radiator clip “clicks” into the slot in the top of the bracket.

#3) Swap the upper mounting brackets from the stock intercooler to the delete brackets or replace them if they are broken (available on ecstuning.com by clicking [HERE](#)).

#4) Slide the lower mounting posts into the grommets in the core support. There will be a gap between the bottom of the bracket and the grommet (inset photo).

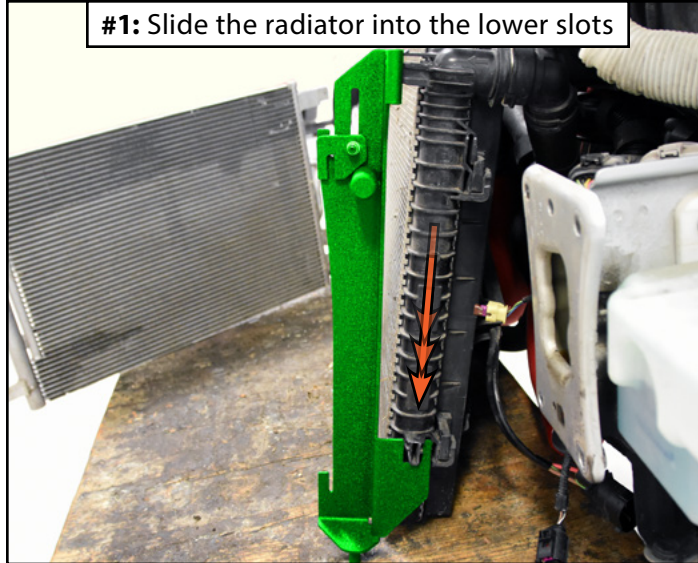


#1: Slide the radiator into the lower slots

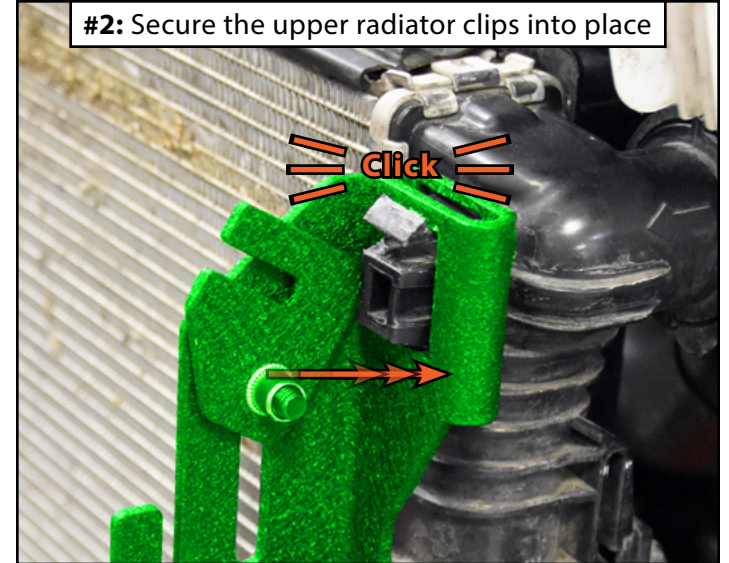

#2: Secure the upper radiator clips into place



#3: Swap the upper mounting brackets

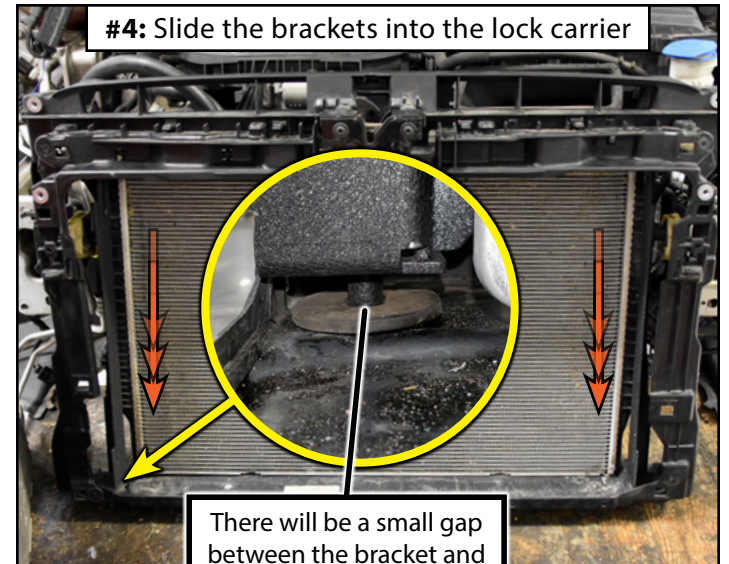


#4: Slide the brackets into the lock carrier

There will be a small gap between the bracket and the grommet

INSTALLING THE INTERCOOLER DELETE BRACKETS


Step 2: 4mm Hex (Allen)

Slide the A/C condenser into the slots on the front of the delete brackets (highlighted in **GREEN**), then slide each A/C brackets down over the upper mounting tab as shown and tighten the bolt (arrow) to secure it into place.

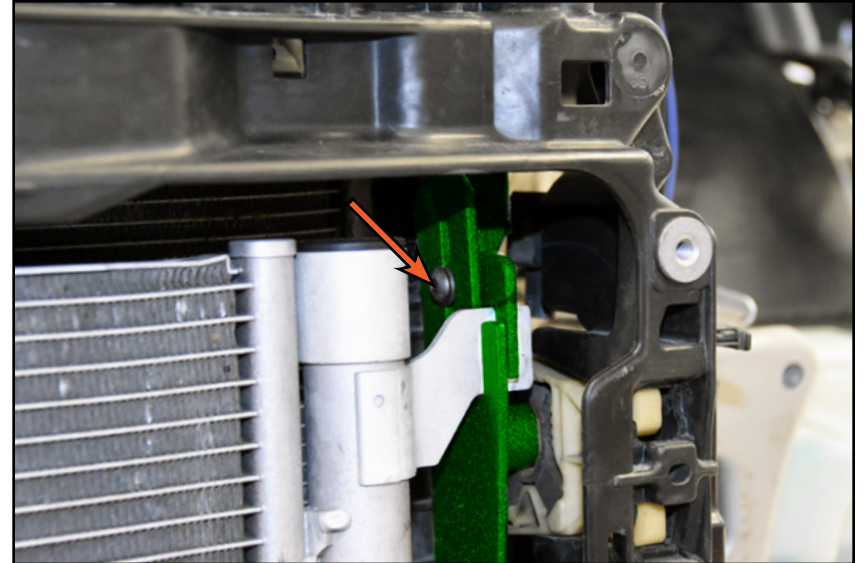

Step 3:

Align the two upper intercooler brackets with the mounting holes in the lock carrier, push the two assemblies together until the brackets "click" into place, then reinstall the two air channels onto the front of the lock carrier.

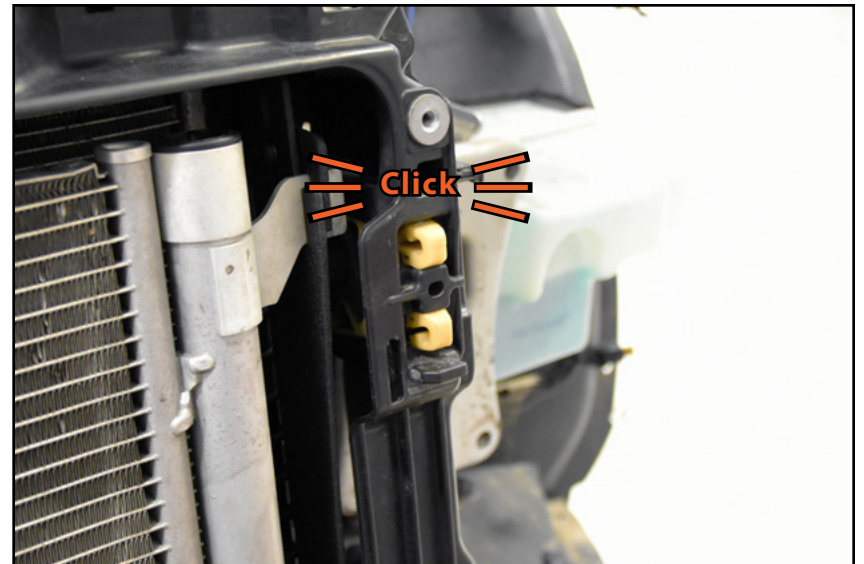


INSTALLING THE INTERCOOLER DELETE BRACKETS

Step 4:

Reinstall the two plastic air dams onto the front of the lock carrier.

LOOSELY reinstall the crash beam, we will torque these bolts later.

Reinstall the two nuts which secure the hood latch brace to the crash beam.

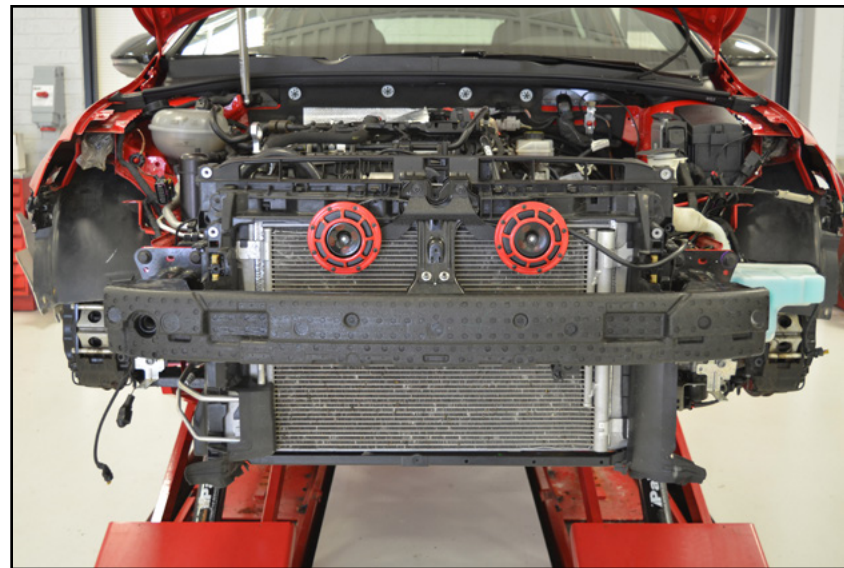


Step 5: T30 Torx, 16mm Socket, Torque Wrench

Align the bolts on the crash beam and the lock carrier with the paint marks we applied earlier.

Torque the crash beam bolts to 55 Nm (41 Ft-lbs).

Torque the lock carrier bolts to 8 Nm (6 Ft-lbs).

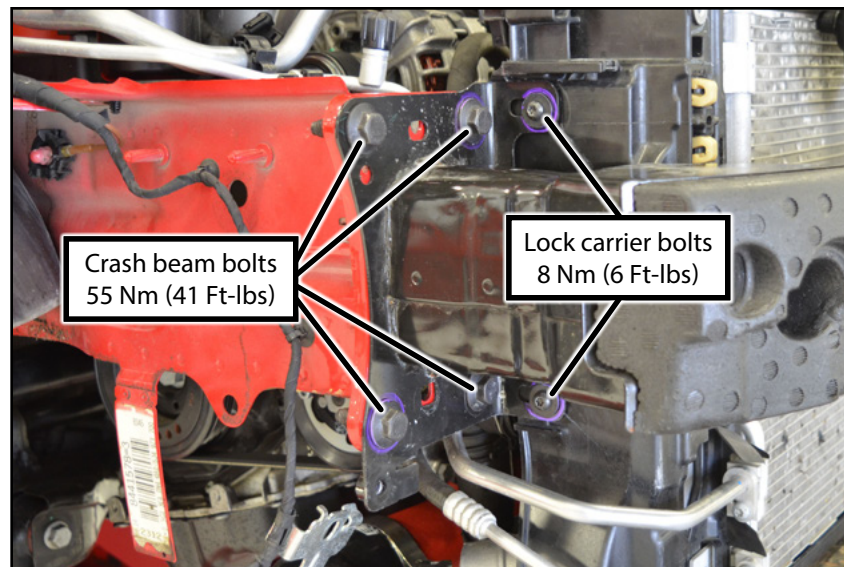


INSTALLING THE INTERCOOLER DELETE BRACKETS

Step 6:

Reconnect the following:

- RH crash sensor (located on the RH of side the lock carrier)
- Hood latch switch (located on the RH side of the lock carrier)
- Coolant temp sensor (located on the lower radiator hose)
- LH crash sensor (located on the LH side of the lock carrier)

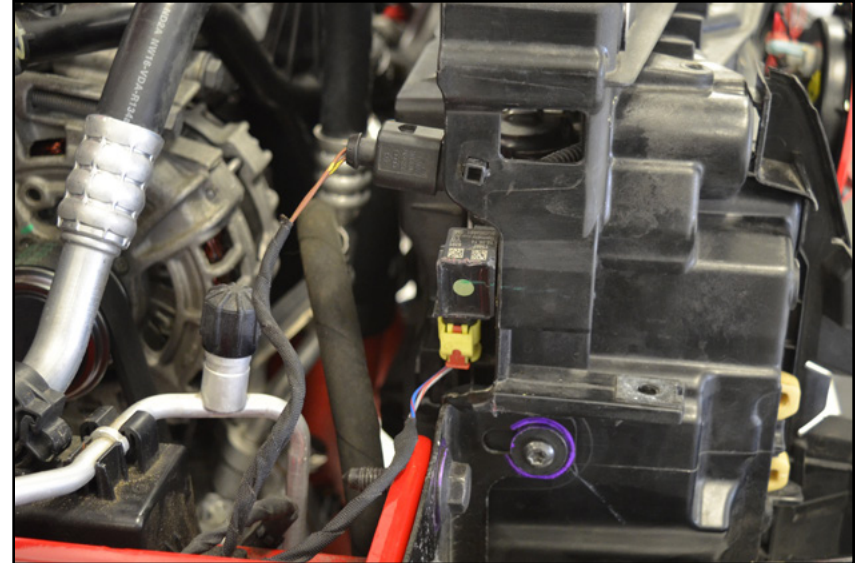

Step 7:

Reinstall both headlights.

Reinstall the core support braces.

Reconnect the hood release cable.

Reconnect both horns and reinstall their mounting brackets.

Reinstall the grille support panel.

Reinstall the front bumper cover (reconnect the fog lights).



INSTALLING THE INTERCOOLER DELETE BRACKETS

Step 8:

Connect the charge pipe hoses.

Reinstall the lower fender liners.

Reinstall the belly pan.



Step 9:


Reinstall the grille.

Reinstall the core support braces.

Reinstall the air inlet duct.

Reconnect the negative battery terminal.

Congratulations, your install is complete!

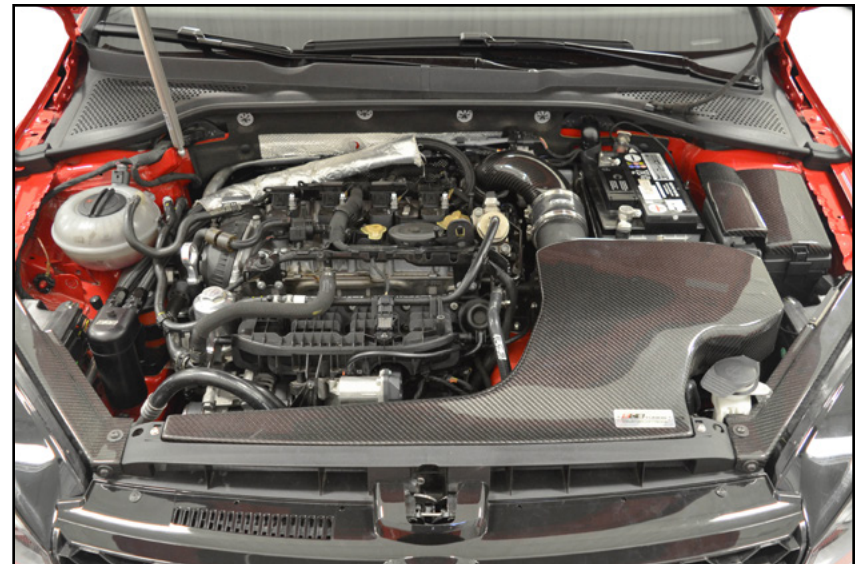

Your Intercooler Delete Brackets Kit installation is complete!



These instructions are provided as a courtesy by ECS Tuning

Proper service and repair procedures are vital to the safe, reliable operation of all motor vehicles as well as the personal safety of those performing the repairs. Standard safety procedures and precautions (including use of safety goggles and proper tools and equipment) should be followed at all times to eliminate the possibility of personal injury or improper service which could damage the vehicle or compromise its safety.

Although this material has been prepared with the intent to provide reliable information, no warranty (express or implied) is made as to its accuracy or completeness. Neither is any liability assumed for loss or damage resulting from reliance on this material. SPECIFICALLY, NO WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER WARRANTY IS MADE OR TO BE IMPLIED WITH RESPECT TO THIS MATERIAL. In no event will ECS Tuning, Incorporated or its affiliates be liable for any damages, direct or indirect, consequential or compensatory, arising out of the use of this material.